

FLKM 40-PA-S95

Order No.: 2289544

The illustration shows version FLKM 40-PA-MA12/S100



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2289544>

Front adapter, for Siemens SIMATIC® S5-95U, 1 x 32 channels can be connected

Commercial data	
EAN	4017918057626
Pack	2 Pcs.
Customs tariff	85369010
Weight/Piece	0.1076 KG
Catalog page information	Page 158 (IF-2002)

Product notes

WEEE/RoHS-compliant since:
01/25/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Nominal voltage U_N	60 V AC/DC
Max. perm. current (per branch)	0.5 A

Max. perm. current (separate power supply)	4 A (per slip-on connection (L+n+1, L+n, M))
Channels which can be connected	32
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	1
No. of positions, plug connector	40
Number of positions	40
Ambient temperature (operation)	-20 °C ... 50 °C
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)

Certificates / Approvals

Approval logo




requested approbations

Certification	CUL, GOST, UL
---------------	---------------

Drawings

Circuit diagram

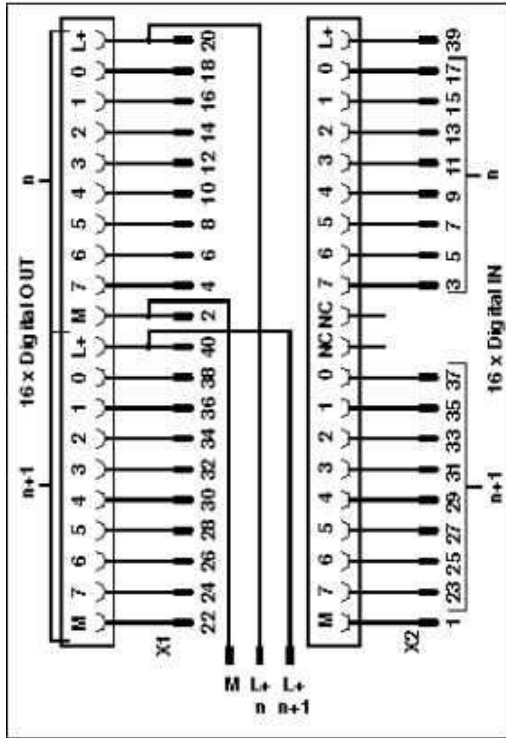

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2008 Phoenix Contact
Technical modifications reserved;