


# molex

## **INSULATION DISPLACEMENT CABLE**

.050" PITCH, 26 AWG, 19/38 STRANDED, EXTRUDED FEP

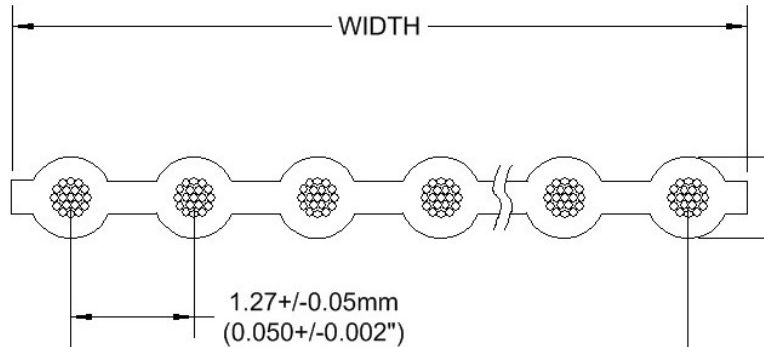

Cond. No.	Part Number	Span	Width
10	1000570483	11.4 ± 0.18mm (0.450 ± .007)	12.7 ± 0.18mm (0.500 ± .007)
15	1000570455	17.8 ± 0.18mm (0.700 ± .007)	19.0 ± 0.18mm (0.750 ± .007)
16	1000570126	19.0 ± 0.18mm (0.750 ± .007)	20.3 ± 0.18mm (0.800 ± .007)
20	1000570127	24.1 ± 0.18mm (0.950 ± .010)	25.4 ± 0.25mm (1.000 ± .010)
34	1000570132	41.9 ± 0.18mm (1.650 ± .010)	43.2 ± 0.25mm (1.700 ± .010)
40	1000570133	49.5 ± 0.18mm (1.950 ± .010)	50.8 ± 0.25mm (2.000 ± .010)
50	1000570134	62.23 ± 0.25mm (2.450 ± .010)	63.5 ± 0.25mm (2.500 ± .010)

<b>CHARACTERISTICS</b>	
<b>Conductor</b>	26 AWG, 19/38 Stranded, Silver Plated High Strength Copper Alloy.
<b>Insulation</b>	FEP
<b>Color</b>	Blue (Optional: Rainbow, 0.035+/-0.003")
<b>Impedance (ohms)</b>	100 Unbalanced
<b>Capacitance (pF/ft)</b>	12.0 Unbalanced
<b>Inductance (uH/ft)</b>	0.12 Unbalanced
<b>Insulation Resistance (Mohm)</b>	>500
<b>Voltage Rating</b>	300V
<b>Temperature Rating</b>	-55°C to 200°C

### **PACKAGING**

150 ft./spool , 20 ft. Minimum Length.

**UL Style 20424**