



8-Outlet Power Strip with Surge Protection, 6 ft. (1.83 m) Cord, 1650 Joules, 48 in. length

MODEL NUMBER: **SS480806**

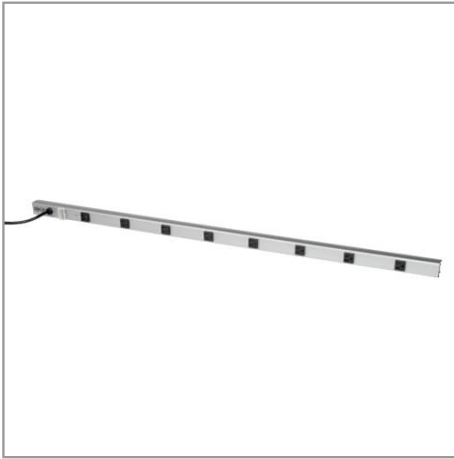

Easily add extra surge-protected power outlets with extra wide spacing in computer rooms, workbenches, repair shops, labs or anywhere that needs to connect many electrical devices simultaneously to a single AC wall outlet.

Features

Multi-Outlet 120V Power Distribution and Surge Protection for Locations with Limited Free Space

- 1800W, 120V, 15A, corded, multi-outlet power strip that connects multiple electrical devices in close proximity to a single AC wall socket
- Contains an integral surge protector to eliminate the need for a separate desktop unit that can clutter up your work space
- Saves the time and cost of installing new outlets in un-powered areas
- Ideal for branch circuit power distribution to telecommunications, computers or internetworking equipment in rack enclosures, workbenches, table tops, work stations, offices, factories, repair shops, test stands and engineering labs

8 Widely Spaced Outlets That Fit Transformers or AC Adapters without Blocking Adjacent Outlets

- Features 8 NEMA 5-15R outlets that are compatible with all standard electrical equipment
- Each outlet is spaced 5.28 inches apart (center to center) – wide enough to fit transformers or AC adapters without blocking adjacent outlets, so you can fully utilize the power strip all the time

Premium-Grade, Surge Suppression to Protect Against Destructive Surges and Line Noise

- Contains a premium-grade surge suppressor rated at 1650 Joules that goes well beyond competing surge protectors, giving you an exceptional level of AC transient surge and EMI/RFI line noise protection for computers and other sensitive electronics

Adjustable Vertical and Horizontal Mounting Options

- A convenient method of optional horizontal or vertical power distribution
- Its 48-in. length and strip-style form factor fits in the most confined spaces unobtrusively
- Easy-to-install with adjustable mounting clips

Highlights

- 8 NEMA 5-15R outlets with 5.28-in. center-to-center spacing – wide enough for transformers without blocking adjacent outlets
- Rated at 1800W, 120V, 15A, featuring a resettable circuit breaker to prevent circuit overloads
- Integral, premium-grade, 1650-Joule surge suppressor to protect sensitive electronics from destructive AC transient surges
- Vertical or horizontal mounting with adjustable mounting clips
- Rocker-style, illuminated power switch with locking safety cover to prevent accidental turn offs
- Certified to meet UL 1449 3rd Edition and UL 1363 standards

Package Includes

- SS480806 Power Strip/Surge Suppressor
- Set of adjustable mounting clips
- Warranty information
- Instruction manual



Premium Safety Features

- Features an illuminated, rocker-style power switch with a locking, transparent guard to prevent accidental turn offs
- An integral, 15-amp resettable circuit breaker prevents dangerous circuit overloads that can irreversibly damage connected equipment

Rugged, Durable Housing

- A rugged, all-metal housing is durably constructed making it a great solution for industrial applications
- An attractive gray housing with stylish black receptacles match the decor of most professional settings

Specifications

OVERVIEW	
UPC Code	037332186430
INPUT	
Nominal Input Voltage(s) Supported	120V AC
Recommended Electrical Service	120V
Input Cord Gauge (AWG)	14
Voltage Compatibility (VAC)	120
Input Plug Type	NEMA 5-15P
Input Cord Details	SJT
Input Cord Length (ft.)	6
Right-Angle Plug	No
Input Cord Length (m)	1.83
Integrated Cord Clip	No
OUTPUT	
Frequency Compatibility	60 Hz
Output (Watts)	1800
Output Receptacles	(8) 5-15R
Circuit Breaker (amps)	15
Outlet Spacing	5.28-in. center-to-center spacing
USER INTERFACE, ALERTS & CONTROLS	
Diagnostic LED(s)	No
Switches	Combination AC circuit breaker and lighted 2-position power switch controls power to all outlets
Locking Switch Cover	Transparent locking switch cover



SURGE / NOISE SUPPRESSION	
AC Suppression Joule Rating	1650
UL1449 Let Through Rating	500V UL verified
EMI / RFI Filtering	Yes
Automatic Shut-Off	No
DATALINE SURGE SUPPRESSION	
Cable (Coax) Protection	No
Network (Ethernet) Protection	No
Telephone/DSL Protection	No
PHYSICAL	
Power Cord Color	Black
Housing Color	Silver
Included Mounting Accessories	Set of adjustable mounting clamps
Mounting Holes or Slots	No
Outlets Measurement (Center to Center)	5.28
Receptacle Color	Black
Shipping Dimensions (hwd / in.)	2.40 x 3.40 x 51.90
Shipping Dimensions (hwd / cm)	6.10 x 8.64 x 131.83
Shipping Weight (lbs.)	3.30
Shipping Weight (kg)	1.50
Unit Dimensions (hwd / in.)	1.250 x 1.620 x 48.000
Unit Dimensions (hwd / cm)	3.18 x 4.11 x 121.9
Unit Weight (lbs.)	2.64
Unit Weight (kg)	1.20
Outlet Spacing	5.28-in. center-to-center spacing
FEATURES & SPECIFICATIONS	
Antimicrobial	No
Rotatable Outlets	No
STANDARDS & COMPLIANCE	
Product Certifications	cUL Listed; UL 1449; UL 1363; UL Listed
Product Compliance	RoHS



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>