

Economy Power 2.5 TE Internal #: 1969442-9 Housing, Receptacle, Wire-to-Board, 9 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5

#### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Board Number of Positions: 9 Centerline (Pitch): 2.5 mm [.098 in ]

#### Features



#### Product Type Features

Connector Product Type	Housing			
Connector & Housing Type	Receptacle			
Connector System	Wire-to-Board			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	9			
Number of Rows	1			
Electrical Characteristics				
Operating Voltage	250 VAC			
Body Features				
Primary Product Color	Natural			
Contact Features				

Housing, Receptacle, Wire-to-Board, 9 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Contact Type	Socket			
Contact Base Material	Copper Alloy			
Contact Current Rating (Max)	4.5 A			
Termination Features				
Termination Method to Wire & Cable	Crimp			
Mechanical Attachment				
Strain Relief	Without			
Panel Mount Feature	Without			
PCB Mount Retention	Without			
Mating Retention Type	Latch			
Mating Retention	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				
Housing Entry Configuration	Both Ends Closed			
Housing Material	Nylon - GF			
Centerline (Pitch)	2.5 mm[.098 in]			

#### Dimensions

Connector Length	24.8 mm[.976 in]			
Connector Height	8 mm[.315 in]			
Connector Width	9.58 mm[.377 in]			
Wire Size	.13 – .33 mm²			
Usage Conditions				
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]			
Operation/Application				
Circuit Application	Power			
Circuit Application Industry Standards	Power			
	Power Standard Part - Not Glow Wire			
Industry Standards				
Industry Standards Glow Wire Rating	Standard Part - Not Glow Wire			
Industry Standards Glow Wire Rating UL Flammability Rating	Standard Part - Not Glow Wire			

Housing, Receptacle, Wire-to-Board, 9 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



#### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

### **Compatible Parts**



Housing, Receptacle, Wire-to-Board, 9 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5







## Also in the Series | Economy Power 2.5



Insertion & Extraction To




PCB Headers & Recentacles(494)





Insertion & Extraction Tools(1)	PCB Headers & Receptacles(494)	PCB Latches, Locks & Retainers(49)	Rectangular Power Connectors(43)

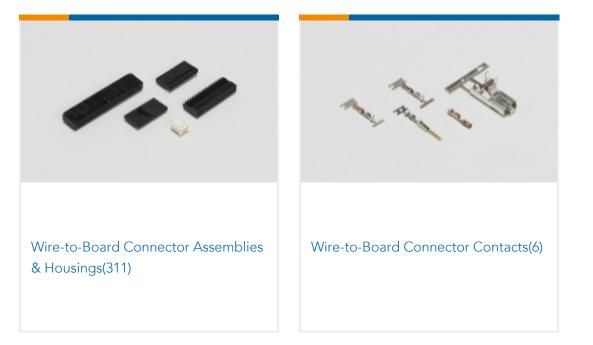

## Customers Also Bought



Housing, Receptacle, Wire-to-Board, 9 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5





### Documents

# Product Drawings

EP 2.5 TPA Housing, 9 Pos

English

#### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1969442-9\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1969442-9\_C.3d\_igs.zip

English

Customer View Model

#### ENG\_CVM\_CVM\_1969442-9\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 7-1773461-6\_EP2.5\_Connector\_Series

English

Product Specifications Application Specification

English

Product Environmental Compliance MD\_1969442-9\_061220181230\_dmtec

English

MD\_1969442-9\_061220181230\_dmtec

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 9 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



UL Report

English