





Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

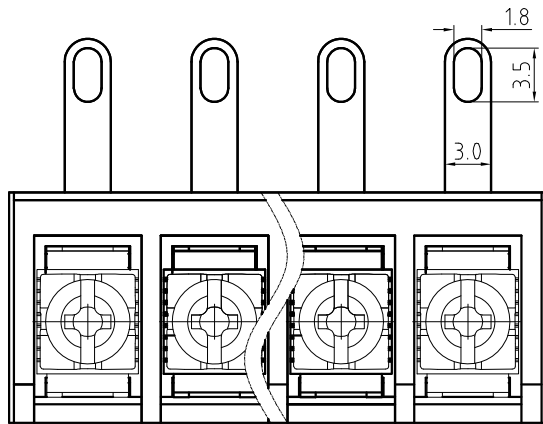

N=Number of contacts

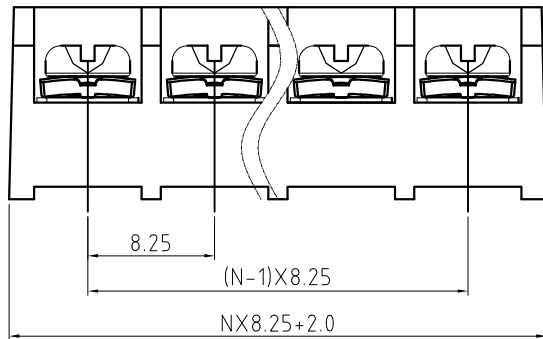

P.C.B LAYOUT

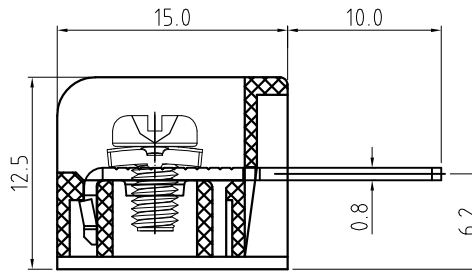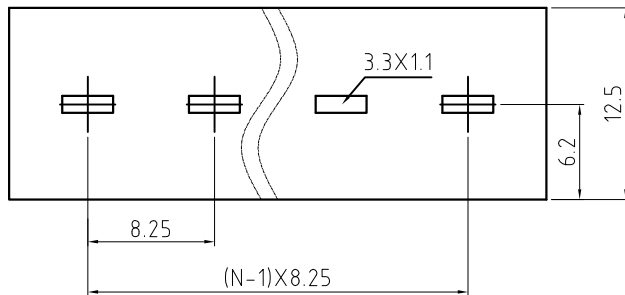

Technical Data:

Electrical

pitch: 8.25mm

Voltage rating: 300 V

Current rating: 20 Amps

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 12-22 AWG

Mechanical:

Torque: 10.0kgf.cm/M3.0

Operating temperature: -40°C to +105°C

Soldering temperature

Temperature: 250°C±10°C /5 seconds max

Safety approval:

RoHS Compliance

Part No.: **OSTYK333XX030**

No. of Poles  
 02 2 Poles  
 03 3 Poles  
 ... ..  
 24 24 Poles

| 3    | Screw        | Steel / M3.0                   | Ni plated     | 1xN        |
|------|--------------|--------------------------------|---------------|------------|
| 2    | Terminal     | Copper Alloy                   | Tin plated    | 1xN        |
| 1    | Body         | PA66+30%GF/PBT+30%GF           |               | 1          |
| ITEM | NAME OF PART | MATERIAL                       | NOTES         | Q'TY       |
| DWG. | DATE         | UNITS: MM                      | SHEET: 1 OF 1 | Tolerance  |
| CHK. | DATE         | SCALE: NONE 3:1 ( : )          | REV.: A       | X.X ±0.50  |
| APP. | DATE         | TITLE: OSTYK-333 SERIES 8.25MM |               | X.XX ±0.30 |
|      |              | WITHOUT FLANGE & WITHOUT COVER |               | X.XX ±0.10 |
|      |              | PART NO. OSTYK333XX030         |               | X* ±1°     |
|      |              | DWG NO. OSTYK333XX030.DWG      |               |            |

| REV | SIGN | DESCRIPTION | CHK. | DATE |
|-----|------|-------------|------|------|
|     |      |             |      |      |



ON-SHORE TECHNOLOGY, INC.