


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00024	Connector, dc plug, 5.5x2.1xL23 mm, molding style, spring contacts	1	
2	30-00692	Wire, 2C TS, 24 AWG, UL2464, 300V, 80C, 4.0 mm, VW-1, PVC	1	
3	24-00182	Overmold, dc plug, 5.5 mm, Tensility	1	black

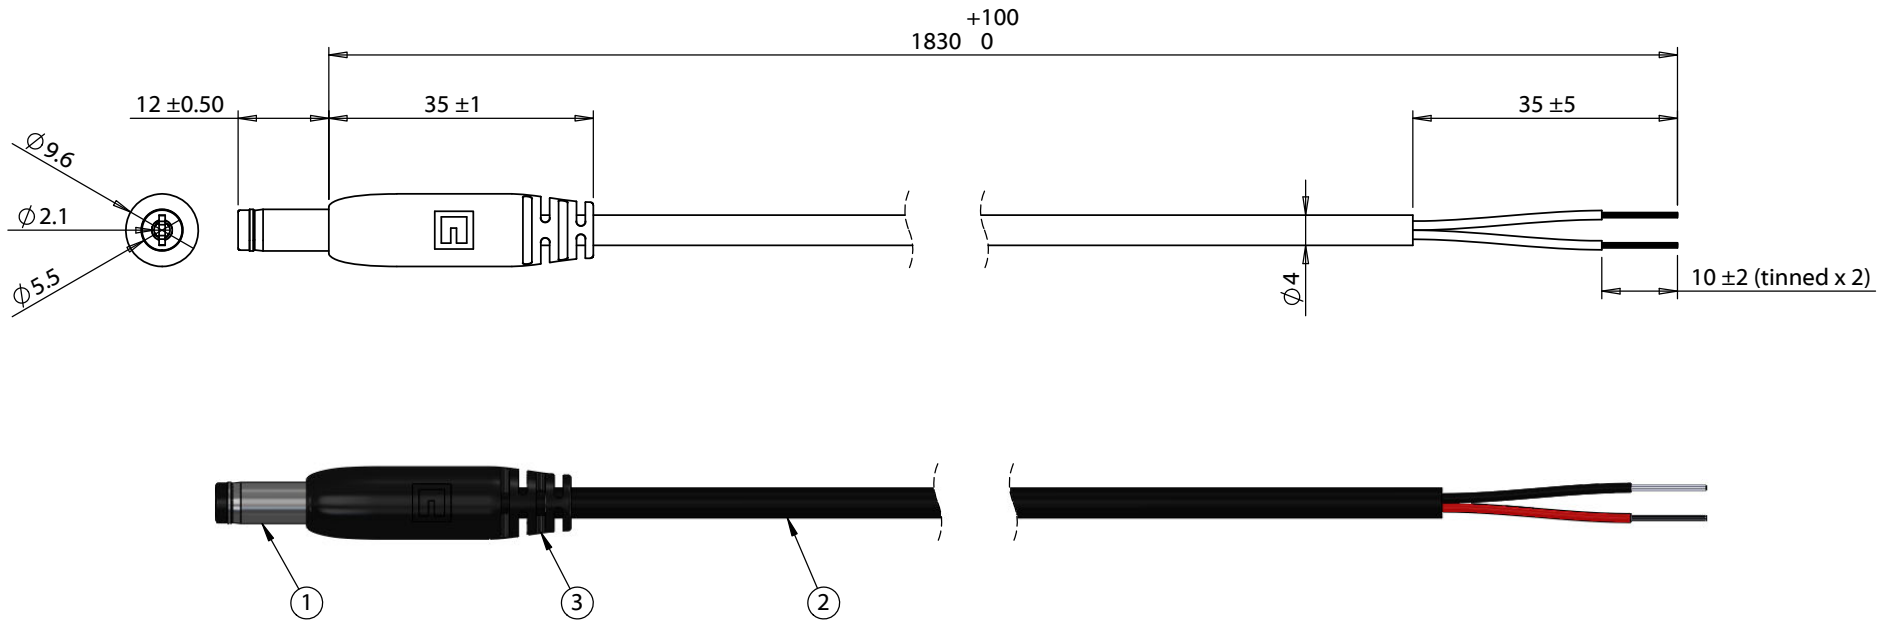

**Notes:**  
Functionally equivalent components may be substituted

Electrical requirements: 4.0 A, 48 Vdc

Wiring Diagram	
50-00024	wire color
center	red
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	9/13/2016	Initial release	JD <small>Digitally signed by JD Date: 2022.12.20 10:39:50 -08'00'</small>	RoHS compliant	
			Verified: PB <small>Digitally signed by PB Date: 2022.12.20 14:07:54 -08'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 5.5x2.1x12 mm 50-00024 dc plug to stripped tinned, 24 AWG, 30-00692 wire	
				Size: A	Part number: 10-02222
				Scale: 1:1	Sheet 1 of 1