



SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

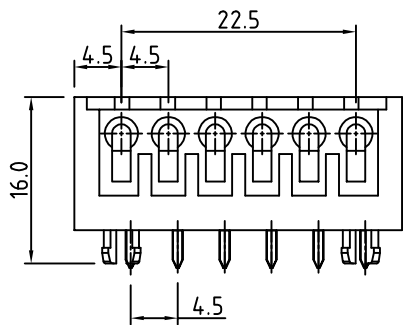




Material

- Terminal body (Contact pin): PhBz
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)


Electrical cULus/VDE

- Voltage rating: 250VAC
- Current rating: 2A
- Wire range: 0.5-0.75mm²
- Solid wire(AWG):
- Stranded wire(AWG):
- Wire strip length: 6-7mm
- Withstanding Voltage: 2KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

RoHS Compliant

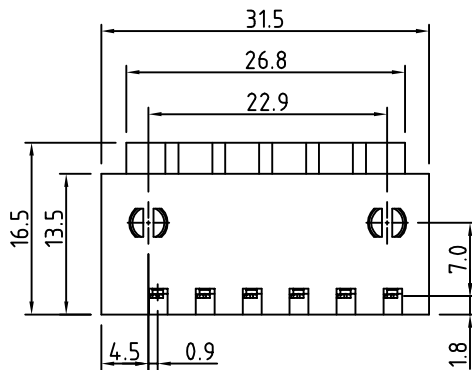


P.C.B LAYOUT

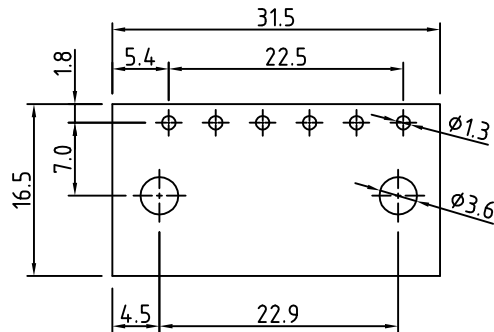

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE	OSTTN-4.5mm Series 6P With cover						
PART NO.	OSTTN062920		DWG NO.	OSTTN062920.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
	Marvin 2008.03.14	Marvin 2006.08.21	Marvin 2006.08.21		UNIT: mm	X.	±0.50
				SHEET: 01/01	SCALE: NONE	X.X	±0.30
				REV.: B		X.XX	±0.10
						X°	±1°