
PROPRIETARY INFORMATION:	REVISION						
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK.INC.	REV	DESCRIPTION	DATE	APPROVED			
	А	INITIAL RELEASE, RFS. 22377, EM	08/21/12	BS			



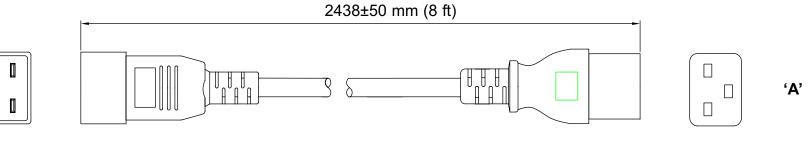

GENERAL SPECIFICATIONS:

RATING: DUAL MARKED CABI F

15A / 250V AC, 15A / 125V AC H05VV-F 3x1.5 mm², 70°C, 16A/250V
SJT 14X3, 105°C, 15A/300V
GREY RAL 7035
2438±50 mm (8 ft)
9.4 <u>+</u> 0.2 mm
IEC 320 / C19 (female)
IEC 320 / C20 (male)
UL, CSA or cUL, CE and VDE MINIMUM
UL, CSA or cUL, CE and VDE MINIMUM
UL, CSA or cUL, CE and VDE MINIMUM

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S). 2. CERTIFICATIONS: CE, ROHS

(VL)

AND	DASH NO.	PART NO	REV.			DESCRIPTION	NOTES		
DE		TABULATION BLOCK							
2.CABLE IS DUAL APPROVED FOR NORTH AMERICA AND EUROPE.			DECI .xx - .xxx -	MALS +/- 0.1 +/005	NCES: ANGULAR +/- 1*	GlobTek, Inc. www.globtek.com 186 Veterans Dr. Nor Tel. 201-784-1000			
Foot Note: Globtek Inc. will not be liable for the safety and performance of these power Limitation of Use: Globtek product are not authorized for use as mission critical components in life support,	INIT.BY: EM	DATE: 08/21/12	MILLIMETERS ANGULA .xx +/- 0.3 +/- 1° .xxx +/013		ANGULAR +/- 1°	DWG TITLE: INTERNATIONAL DETACHABLE JUMPER CORD LENGTH: 8 ft, COLOR: GREY RAL 7035	SET C19/C20,		
	DRAWN: NF	DATE: 08/21/12	FSCN G, CC		SIZE A		REV. A		
	APRVD: HM	DATE: 08/21/12	SCALE: NONE		DNE	PART NO: 70335148F07032-GY(R)	SHEET 1/1		