

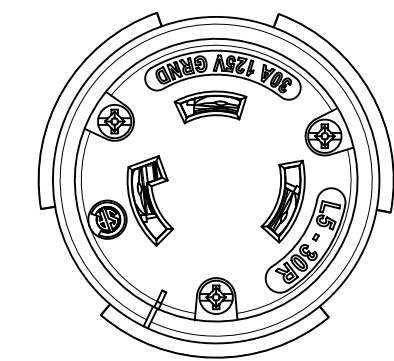
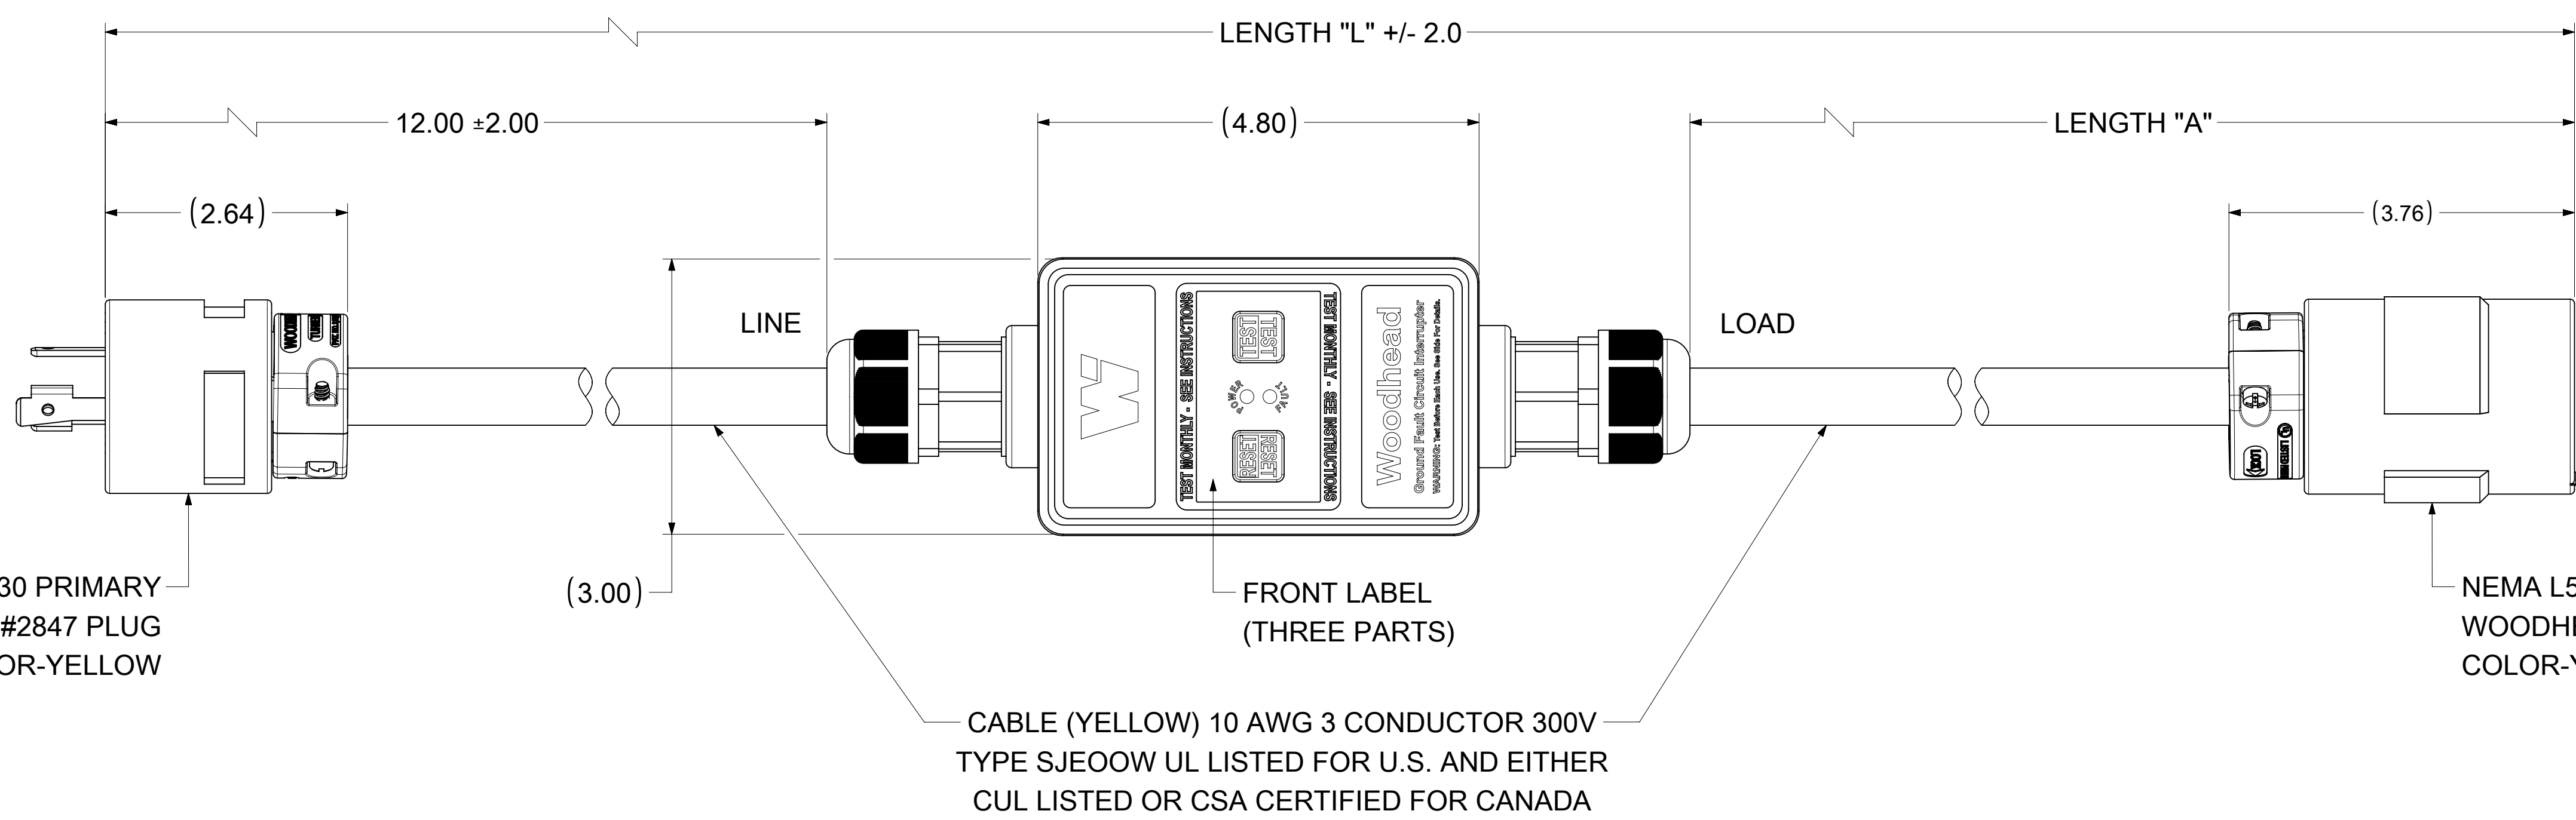



NEMA L5-30 PRIMARY
WOODHEAD #2847 PLUG
COLOR-YELLOW

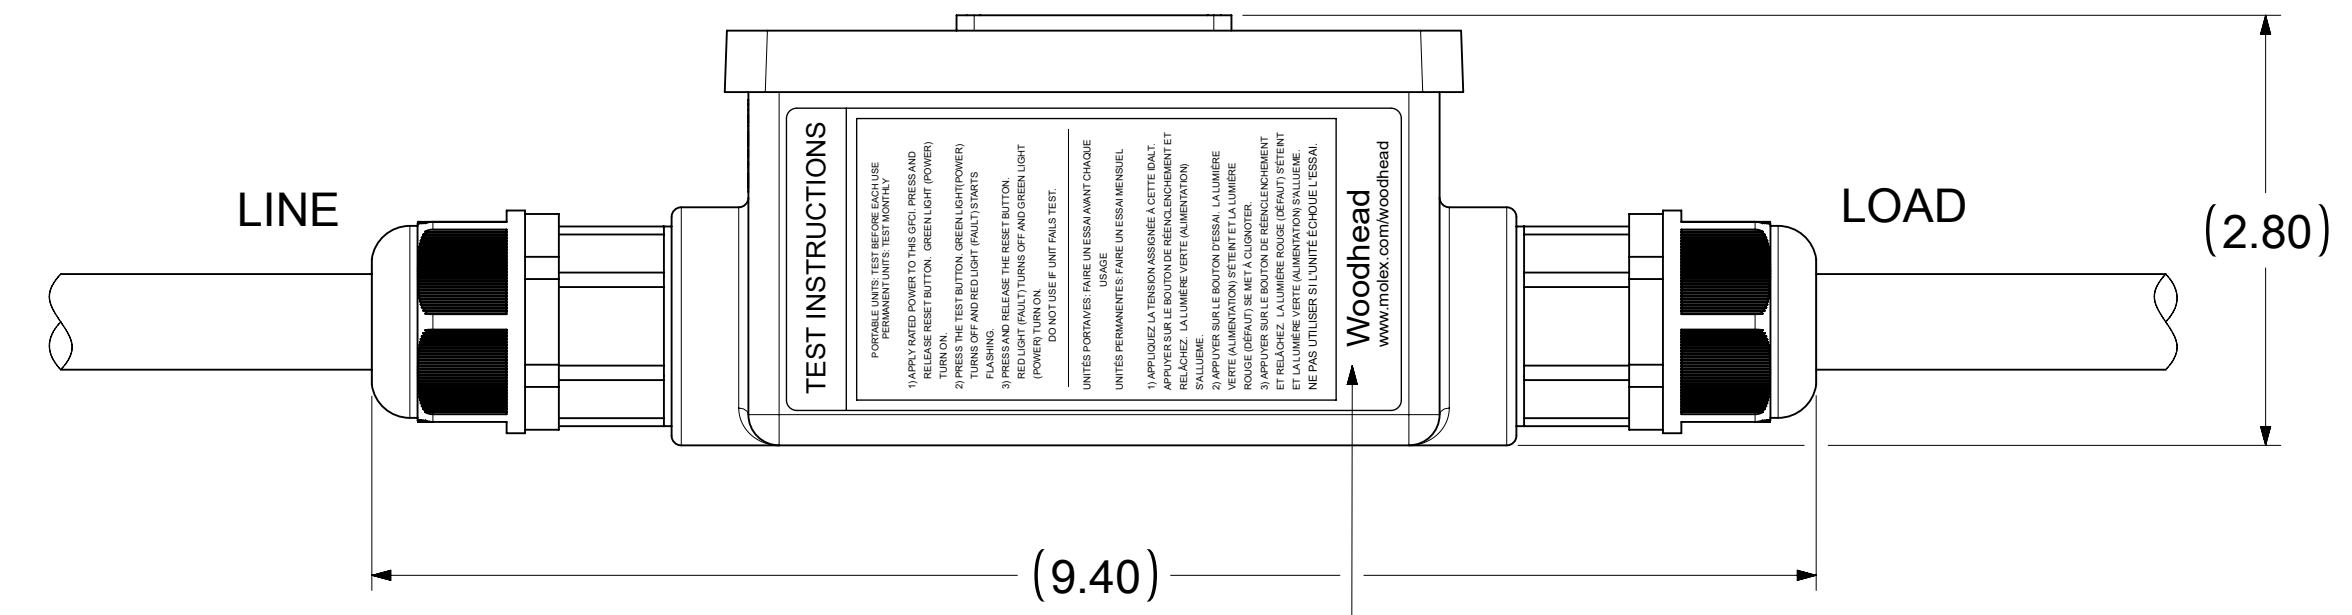

NEMA L5-30 SECONDARY
WOODHEAD #2947 CONNECTOR
COLOR-YELLOW

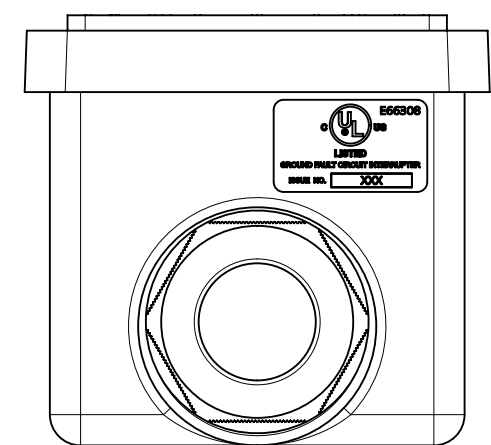

TEST INSTRUCTIONS LABEL

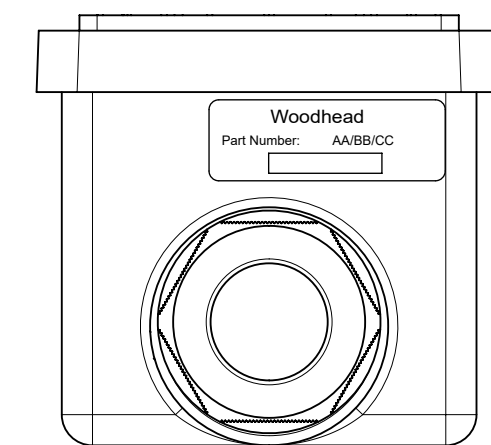

TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X/6P

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530164	30051-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530171	30051-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530168	30051-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530165	30051-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530172	30051-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530169	30051-25M	26 FT 9.4 IN.	25 FT	MANUAL

FUNCTIONAL SYMBOLS FA = 0 FC = 0 FD = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: UPDATED LENGTH "L" IN THE TABLE.				
	DIMENSION UNITS	SCALE	<p>molex</p> <p>30A/120V GFCI AUTO 2 FT. SUPER-SAFEWAY NEMA L5</p> <p>PRODUCT CUSTOMER DRAWING</p>				
	INCH	NTS					
GENERAL TOLERANCES (UNLESS SPECIFIED)							
DIVISIONAL SYMBOLS	ANGULAR TOL	±	°	EC NO: 672829			
4 PLACES	±			DRWN: PPURSTANDEL	2021/08/06		
3 PLACES	±			CHK'D: DNGUYEN62	2021/08/18		
2 PLACES	±			APPR: HKNEELAND	2021/08/31		
1 PLACE	±			INITIAL REVISION:			
0 PLACES	±			DRWN: PPURSTANDEL	2021/07/01		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			D-SIZE	130153	SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2021/08/31	17:57:20
-----------------	----	--------------	------------	----------