




| | |
|--|--|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 10 AWG |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric |
| Wire Strip Length | 9/16 in. |
| Stud Size | 1/4 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | N/A |
| Panduit Die Index No. on Barrel | N/A |
| Alternate Industry Die Index No. () on Barrel | N/A |

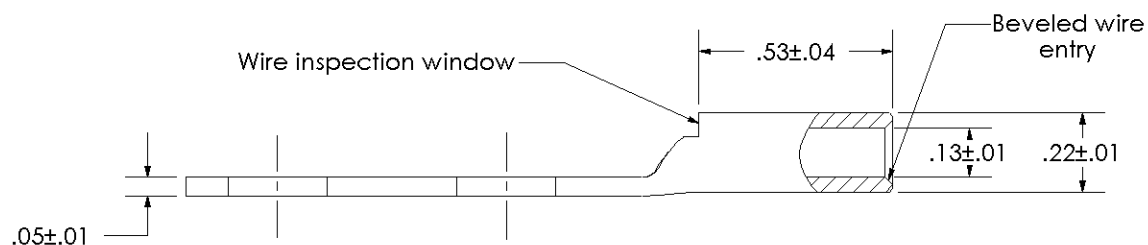

LISTED
Wire Connector

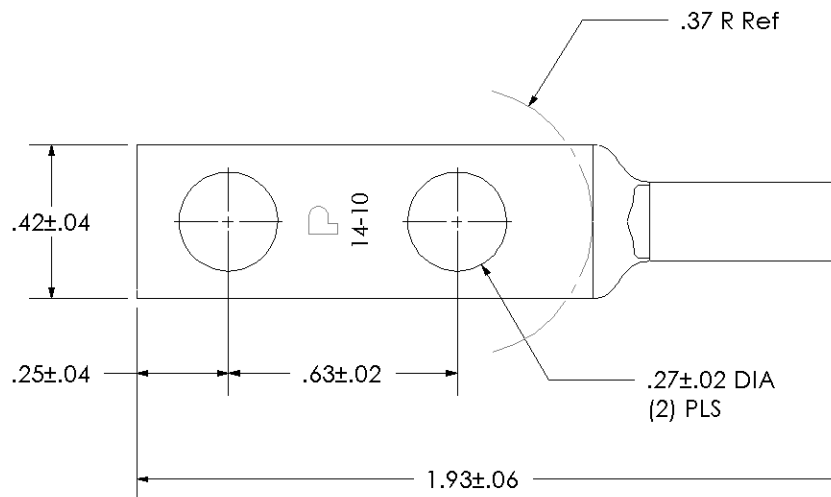

| | | | | | | | |
|------------|-------------|-----------|------------|---------------------------|------------|--|---|
| | | | | | |  PANDUIT CORP. TINLEY PARK, ILLINOIS | |
| | | | | | | LCC10-14AW-L Copper Lug - Two-Hole, Long Barrel with Window | |
| 01 | 9/03 | SAC | SAC | WIRE STRIP LENGTH WAS 5/8 | 11059 | | |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | SCALE N/A | DRAWING NO / CAD FILE LCC10-14AW-CUST |