
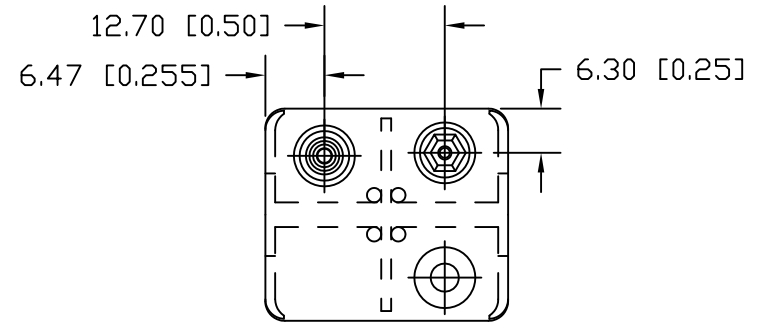
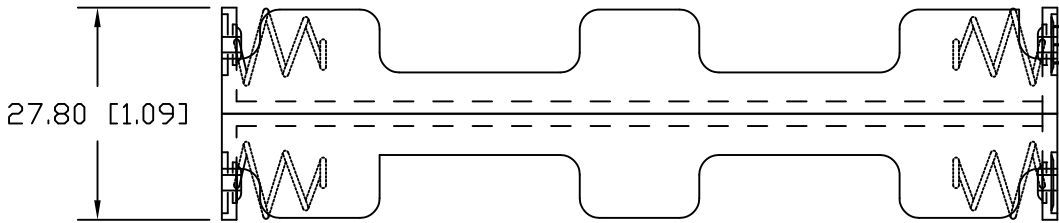



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/19/13	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
6/14/13	B	UPDATED TITLE	T.B.	B.S.	
7/14/16	C	DIM. 107.60 WAS 107.50 DIM. 27.50 WAS 27.80	T.B.	B.S.	
6/16/17	D	UPDATED MATERIAL SPECIFICATION DIM. 107.50 WAS 107.60 DIM. 27.80 WAS 27.50	T.B.	B.S.	

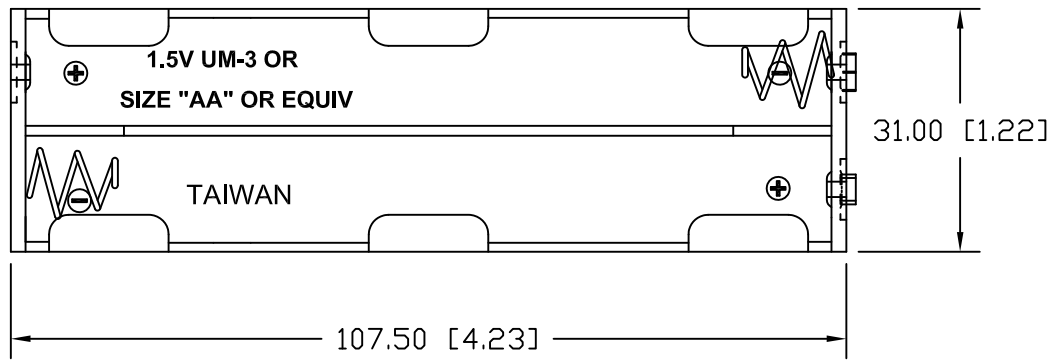

MATERIAL:

HOUSING: POLYPROPYLENE
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 SPRINGS: SPRING STEEL, NICKEL PLATED
 RIVETS: BRASS, NICKEL PLATED
 9V SNAPS: BRASS, NICKEL PLATED
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS
 PER EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title EIGHT "AA" BATTERY HOLDER WITH SNAP FASTENERS		
Angular ± 3°	Date 6/16/17	Drawing Number BH28AASF	
		Approved By T.B.	