


LOC	DIST	REVISIONS					
GW	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A2	ECR-13-009232	10JUN2013	ET	TK

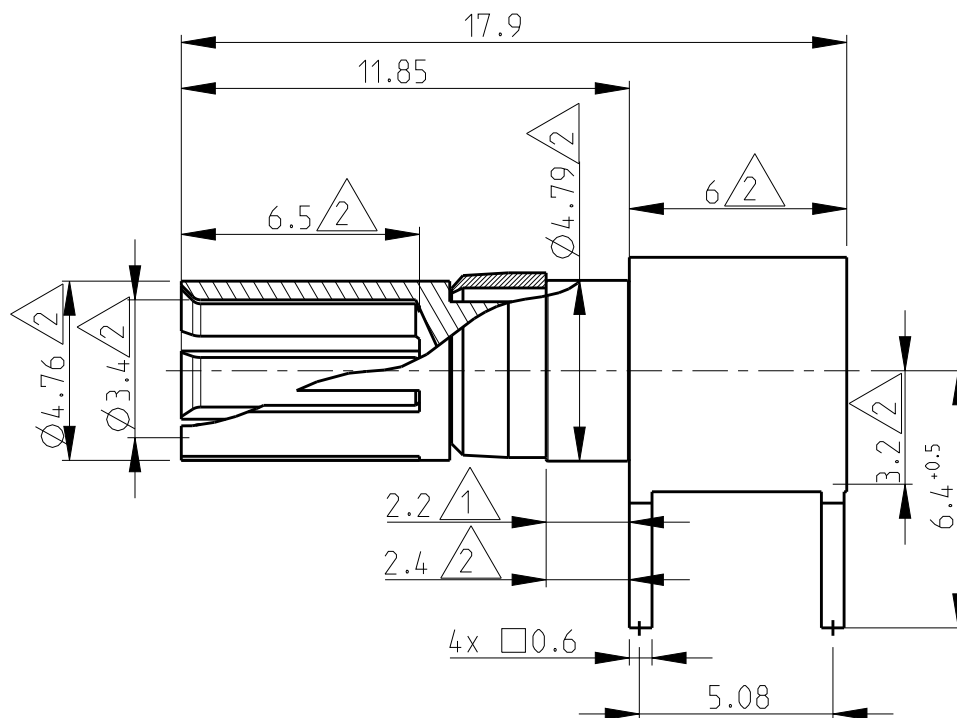


4) Application : DIN 41612 type M

3 Measured with spring moved towards mating face.

2 Max dimensions.

1 Min dimension.

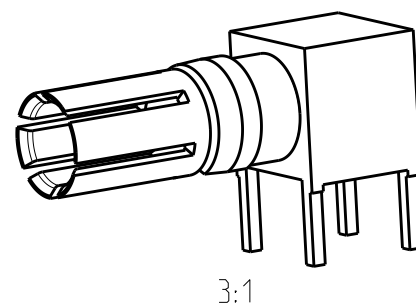

3:1

1:1



Cross reference table

Old part number	TE part number	Current	Material	Plating
C42334-A347-A194	2-1393589-9	40 A	CuBe	1 μ m Au or Pd in contact area

2000


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY -

© COPYRIGHT 2000

THIS DRAWING IS UNPUBLISHED.

DIMENSIONS:		DWN B. Lenvain	19APR2001	MATERIAL		FINISH	
mm		CHK K. Mattheeuws	19APR2001	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. Leeman	19APR2001				
0 PLC ±		PRODUCT SPEC		NAME High current socket with PCB connection			
1 PLC ±		-					
2 PLC ±		APPLICATION SPEC		SIZE A 4			
3 PLC ±		-					
4 PLC ±		WEIGHT		CAGE CODE		DRAWING NO	
ANGLES ±		-		00779		C-2-1393589-9	
		CUSTOMER DRAWING		SCALE		SHEET 1 OF 1	
				5/1		REV A2	