

## Contact insert - HC-HV10-I-CT-M - 1405264

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON pin insert, for 830 V (III/3), with 10 N/O contacts and 2 switch contacts, crimp connection

### Product Features



### Key commercial data

Packing unit	1 pc
Custom tariff number	85389099
Country of origin	China

### Technical data

#### General

Note	For HEAVYCON-ADVANCE housing of B24 type and HEAVYCON housing of HV10 type, crimp contacts CK 2,5-ED (crimp contacts not included in scope of supply)
Connection method	Crimp connection
Pollution degree	3
Surge voltage category	III
Number of positions	10+2+PE
No. of power contacts	10
No. of control contacts	2
Insertion/withdrawal cycles	≥ 500
Type	B24
Conductor cross section	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> (power contacts) 0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> (control contacts)
Connection cross section AWG	20 ... 12 (power contacts) 20 ... 12 (control contacts)

# Contact insert - HC-HV10-I-CT-M - 1405264

## Technical data

### General

Stripping length of the individual wire	7.5 mm (Power contact)
	7.5 mm (control contact)

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

### Material data

Inflammability class according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA

### Electrical characteristics

Rated voltage (III/3)	830 V (power contacts)
	500 V (control contacts)
Rated surge voltage	8 kV (power contacts)
	6 kV (control contacts)
Rated current	25 A (power contacts)
	16 A (control contacts)

## Classifications

### eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424

### ETIM

ETIM 5.0	EC000438
----------	----------

## Approvals

### Approvals

---

#### Approvals

EAC

---

#### Ex Approvals

---

# Contact insert - HC-HV10-I-CT-M - 1405264

## Approvals

Approvals submitted

---

## Approval details


EAC

## Drawings

Diagram

Dimensional drawing


Derating  
diagram

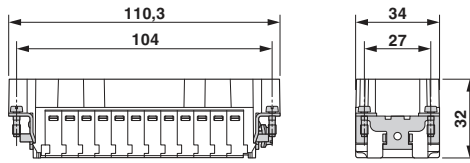

Dimensional drawing

# Contact insert - HC-HV10-I-CT-M - 1405264

Schematic diagram

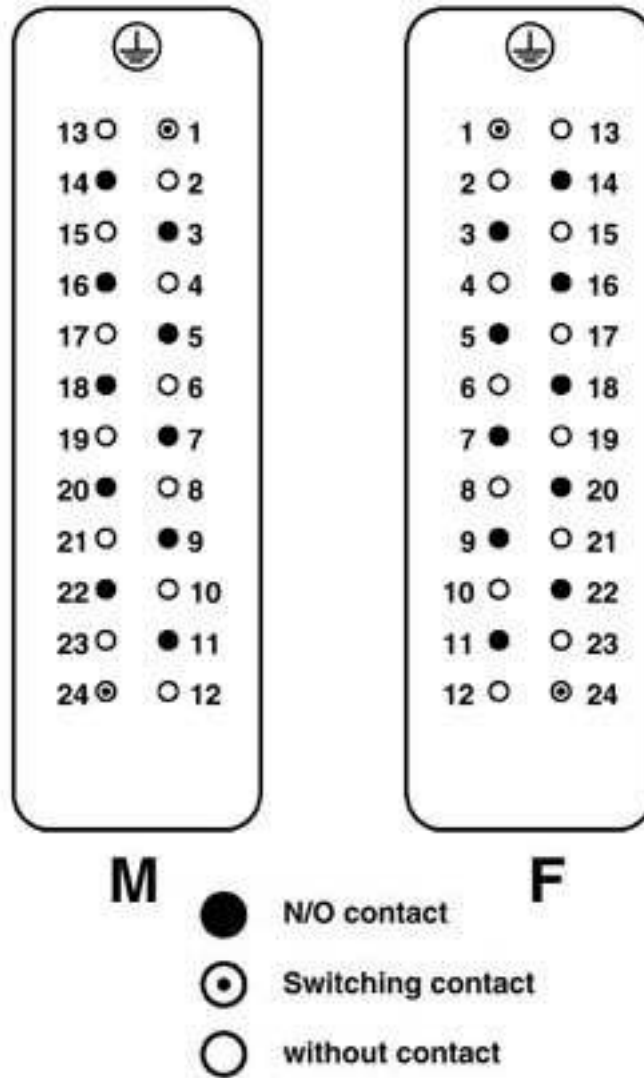

View termination side