

6

5

4

3


2

1


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/6/20	
A		UPDATE DIM.	7/30/20	LH/TL



Section B-B



Section A-A

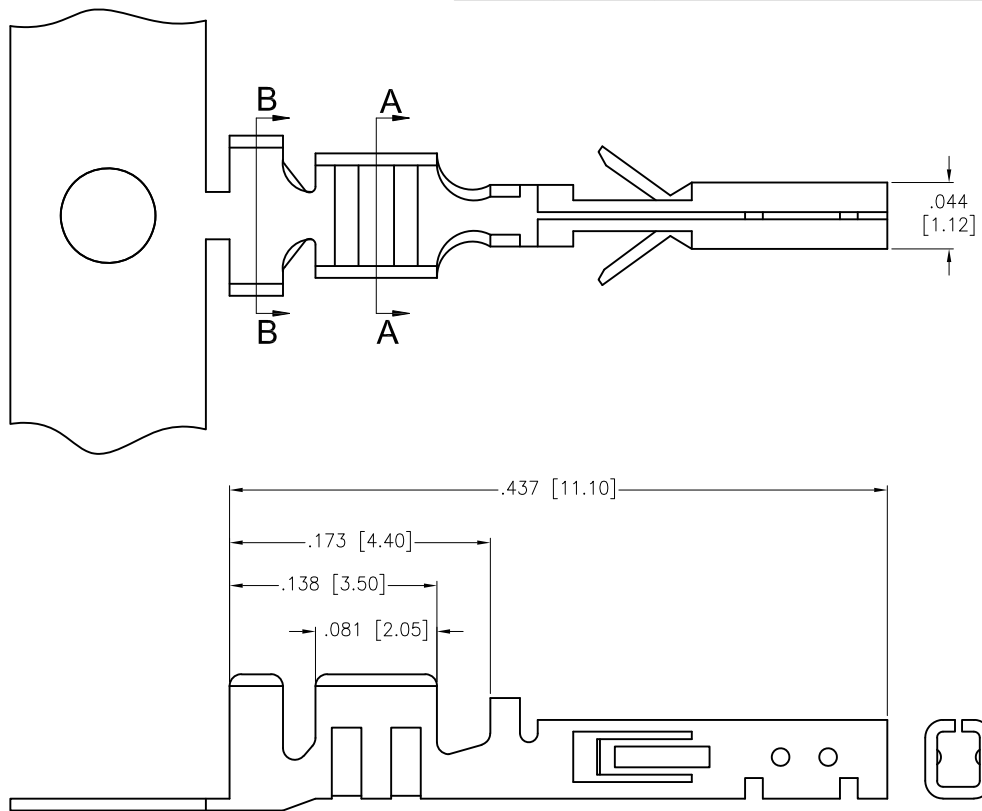

SPECIFICATIONS:

Material:
 Contact: Phosphor Bronze, Tin Plated
 Thickness: 0.2mm

Electrical:
 Voltage rating: 250 V AC/DC
 Current rating: 20 Awg: 5 Amps max
 22 Awg: 5 Amps max
 24 Awg: 4 Amps max
 26 Awg: 3 Amps max
 28 Awg: 2 Amps max
 30 Awg: 1 Amp max

Contact resistance: 10 mohms max.
 Dielectric withstanding voltage: 1500 VAC for 1 minute

Environmental:
 Lead free, RoHS compliant.



P/N	Wire size	Dim. A	Dim. B	Dim. C	Dim. D
DMT-A5-C-F-T-R	#26~#30AWG	.071 [1.80]	.063 [1.60]	.094 [2.40]	.075 [1.90]
DMT-B5-C-F-T-R	#20~#24AWG	.083 [2.10]	.083 [2.10]	.106 [2.70]	.098 [2.50]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

.X ± .10	∅X ± .10
.XX ± .020	∅XX ± .015
.XXX ± .015	∅XXX ± .010

ADAM TECH
 INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	LH	3/6/20
CHECKED	AY1	3/6/20
APPROVED		

TITLE		.118" [3.0mm] CRIMP TERMINAL, TIN PLATED, ON REEL	
SIZE	PART NO.	REV.	
X	DMT-X5-C-F-T-R	A	
REF: S00015T	SCALE: NTS	SHEET 1 OF 1	

6

5

4

3

2

1