


REVISIONS			3TMT7084		REV. A
ECN	SYM	DESCRIPTION	DATE	BY	APPROVAL
52424	A	CREATE NEW DRAWING	12-OCT-98	sue	

- NOTES:
- SWITCH RATING: 1A, 125VAC, 30VDC
UL, CSA
 - CHARACTERISTICS MEASURED AT POINT "A".

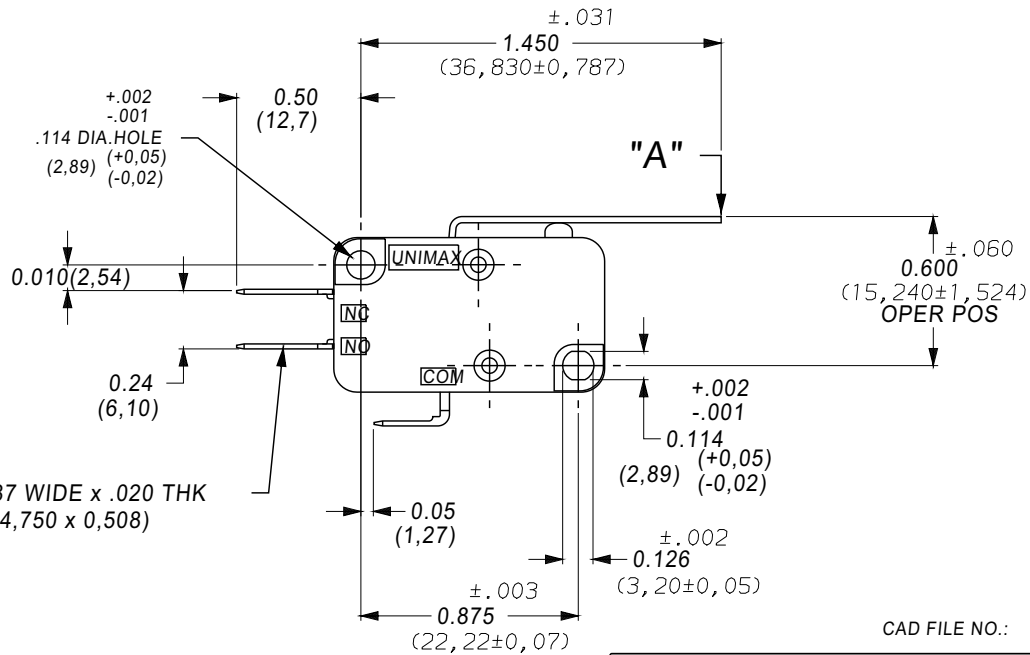

SWITCH CHARACTERISTICS	
OPERATE FORCE GRAMS	80 MAX
RELEASE FORCE GRAMS	16 MIN
RETURN FORCE GRAMS	9 MIN
	AT FULL O.T.
DIFF MOTION MAX IN./MM	.032 / 0.813
PRETRAVEL MAX IN./MM	.200 / 5.080
OVERTRAVEL MIN IN./MM	.060 / 1.524

CAD FILE NO.: 3tmt7084_a

REV. A
3TMT7084
SHT. NO. 1 OF 1

ALL DIMS. AND TOLS. PER ANSI Y14.5		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	
TOLERANCES			
DECIMAL		ANGULAR	
.XX± .015		± 1°	
.XXX± .005			
SCALE	DATE		
2:1	12-OCT-98		
DRAWN			
sue			

3TMT7084	
----------	--

3TMT7084

SHT. NO. 1 OF 1

THIS DOCUMENT AND THE INFORMATION IN IT IS THE EXCLUSIVE PROPERTY OF C&K COMPONENTS, INC., AND IS NOT TO BE USED OR DISCLOSED WITHOUT THE EXPRESS WRITTEN PERMISSION OF C&K COMPONENTS, INC.