



PDQ244915

4-Port MIMO Directional Antenna 2400-2500 MHz and 4900-5950 MHz

The Laird Connectivity's patent pending PDQ244915 antenna is a four-port dual-band, dual polarized directional antenna for use in 802.11n MIMO indoor and outdoor applications. The antenna is an excellent choice for high density Wi-Fi applications where adjacent interference is of concern. The dual-band frequency coverage means that a single type of antenna can be deployed with any MIMO radio in the 2400-2500 MHz and 4900-5950 MHz bands. In addition, the uniform and symmetrical radiation patterns provide a high-level signal density into engineered coverage areas.

FEATURES AND BENEFITS

- Ultra-thin, compact ASA UV stable white housing
- Articulating arm mount can anchored directly to a vertical surface or mast mounted and oriented for optimal signal radiation
- Four radiating elements optimized for indoor and outdoor 802.11 MIMO applications
- Horizontal and vertical polarization for multipath mitigation

APPLICATIONS

- High density Wi-Fi
- Outdoor stadiums, arenas, and convention centers
- Hotels and casinos
- Airport, bus, and train terminals
- Retail stores and indoor pedestrian malls
- Libraries and museums

ELECTRICAL SPECIFICATION		
Model Name	PDQ244915	
Number of Ports	4	
Operating Frequency (MHz)	2400-2500	4900-5950
VSWR - Avg	1.5:1	2.0:1
VSWR - Max	<2.0:1	<2.0:1
Peak Gain - Avg. (dBi)	10.7	13.4
Peak Gain - Max. (dBi)	11.1	15.0
Max. Gain ± 30° above Horizon (dBi)	-	4.7
Port-to-Port Isolation - Avg. (dB)	>40	>39

ELECTRICAL SPECIFICATION		
Port-to-Port Isolation - Max. (dB)	>30	>30
Nominal Impedance (Ohms)	50	
Max Power - Ambient 25°C (W)	10	
Polarization	Vertical (2 ports), Horizontal (2 ports)	
Vertical Plane 3 dB Beamwidth - V-pol	48°	18°
Vertical Plane 3 dB Beamwidth - H-pol	47°	20°
Horizontal Plane 3 dB Beamwidth - V-pol	48°	21°
Horizontal Plane 3 dB Beamwidth - H-pol	50°	21°
Front-to-Back Ratio (dB)	>25	

MECHANICAL SPECIFICATION

Dimensions - mm (inches)	373.3 x 411.4 x 35.8 (14.7 x 16.2 x 1.41)
Weight - kg (lbs.)/Weight w/ mount - kg (lbs.)	1.58 (3.48)/2.28 (5.03)
Cable Type	Plenum rated, CMP rated for Plenum per NFPA 262
Mounting	Mast (44-57 mm) or Concrete Wall (HDMNT kit)
Radome/Baseplate Material	ASA, White, UV Stable

ENVIRONMENTAL SPECIFICATION


Operating Environment (Indoor or Outdoor)	Indoor and Outdoor
Operating Temperature - °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Ingress Protection Rating	IP67
Material Substance Compliance	RoHS

CONFIGURATION

PART NUMBER	CABLE LENGTH	CONNECTOR
PDQ244915-91NF	4x- 91 cm (3.0 ft.)	4x - Type N-Female
PDQ244915-91NM	4x- 91 cm (3.0 ft.)	4x - Type N-Male
PDQ244915-FNF	N/A	4x - Type N-Female


RADIATION PATTERNS

2400 MHz

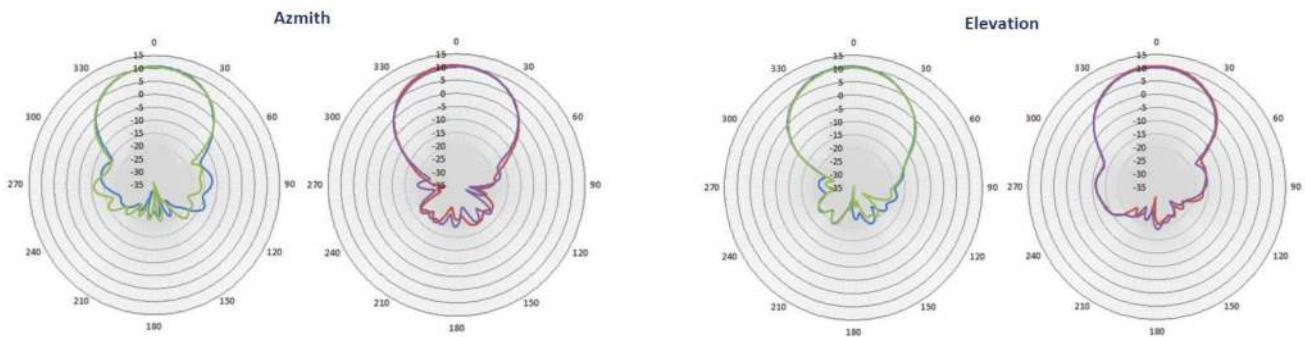


RADIATION PATTERNS


2450 MHz

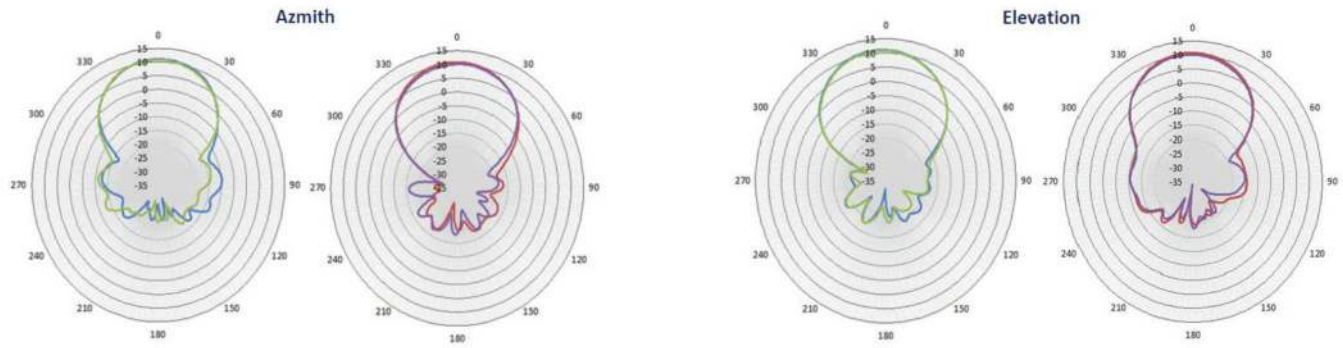


2500 MHz

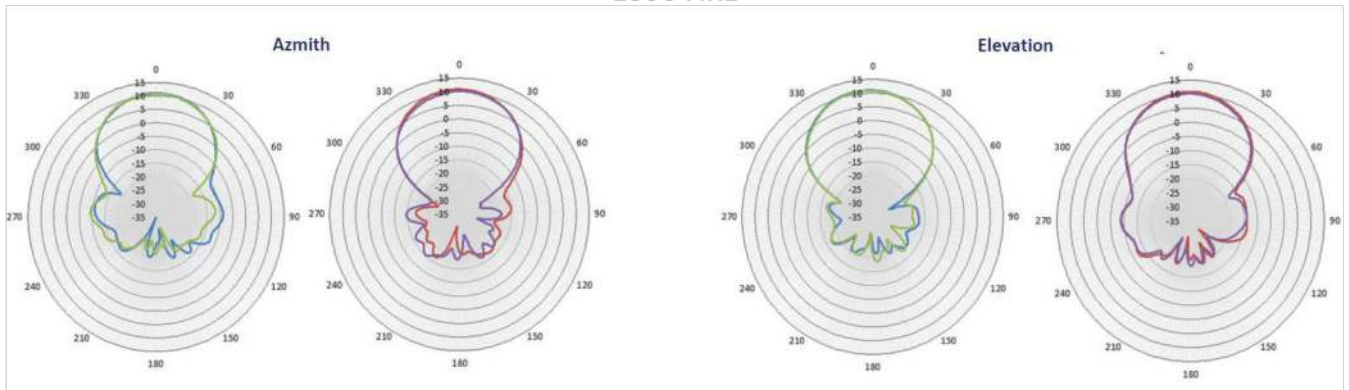

4900 MHz

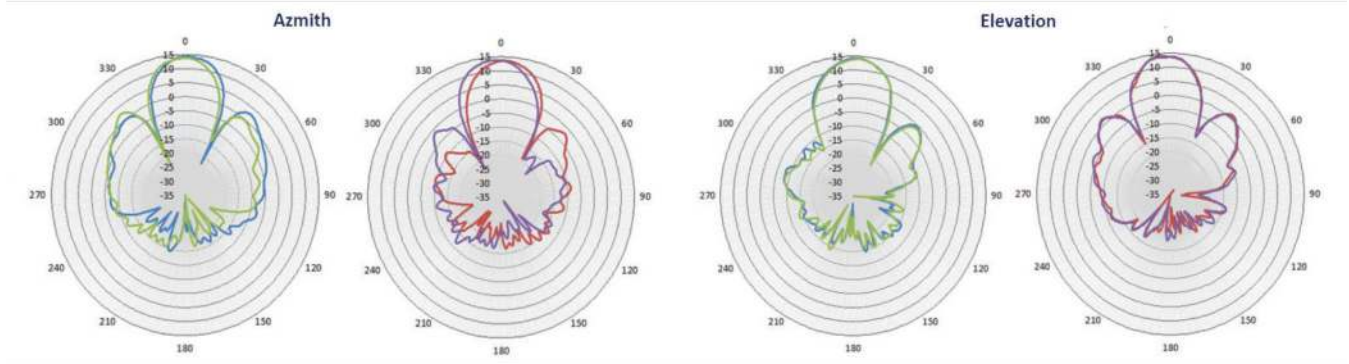


5500 MHz

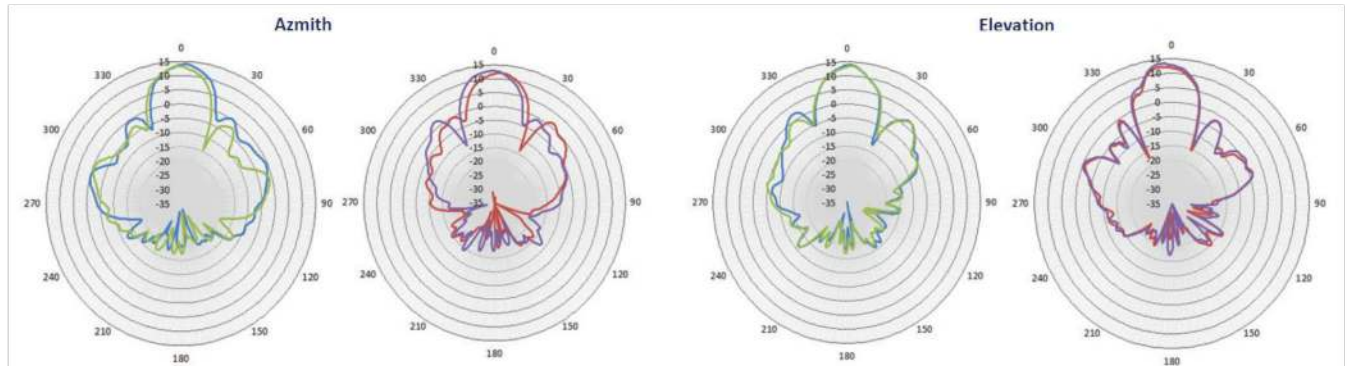

RADIATION PATTERNS

5950 MHz

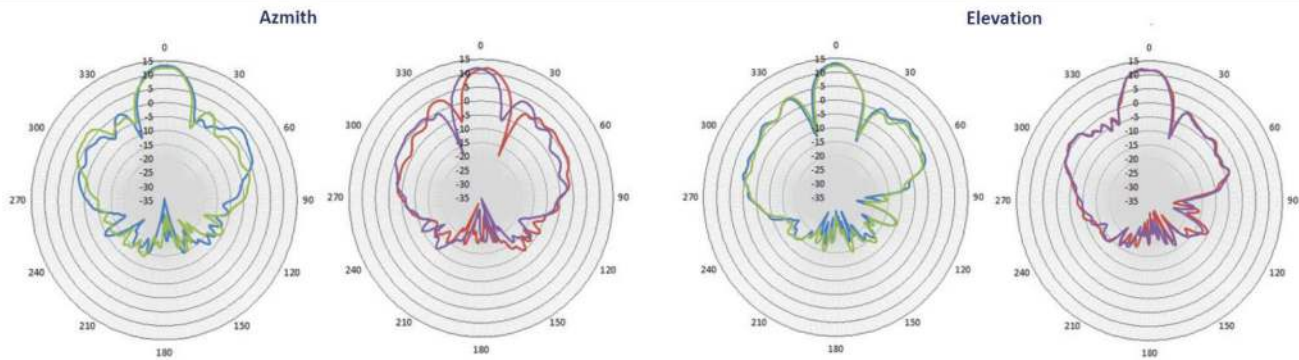

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original