

“Stay Connected” with



Solar Power Components

a PennEngineering® Company

“Coined” edges prevent cable damage





- Heyco’s SunRunner and SunRunner EZ’s robust “double-compression” design securely holds up to two (2) cables from .20” (5,1 mm) to .30” (7,6 mm) in diameter.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead-in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel, not for use in a marine salt water environment.
- 316 stainless steel now available for marine and other harsh environments.
- **SunRunner Vidrio™ is designed to mount directly onto the glass panel with compression force only.** Will not harm the glass surface, and the black color meets many HOA requirements!
- The TPE coating on the SunRunner Vidrio™ provides an electrically insulated surface.
- **SunRunner EZ’s are designed for thicker module frames** as well as racking – accommodates profiles up to .250” (6,4 mm) thick!

## HEYClip™ SunRunner® Cable Clips for 1-2 Cables

Double-Compression, Straight-thru Design

PANEL THICKNESS CLAMPING RANGE		MINIMUM PANEL FLANGE DEPTH		WIRE DIA. RANGE		PART NO.		DESCRIPTION	FOOTPRINT		OVERALL HEIGHT		
Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	304	316		A x B	C	in.	mm.	
in.	mm.	in.	mm.	in.	mm.	Stainless	Stainless		in.	mm.	in.	mm.	
1-2 Wires - SunRunner Clip for panels up to .125” (3,2 mm) thick													
.055	1,4	.125	3,2	0.56	14,2	.20” (5,1 mm) - .30” (7,6 mm) each cable	<b>S6405</b>	<b>S6490</b>	SunRunner® Clip 100 Pack	1.00 x .50	25,4 x 12,7	.39	9,9
							<b>S6445</b>	<b>S6495</b>	SunRunner® Clip Bulk				
1-2 Wires - SunRunner Vidrio™ Clip for GLASS panels up to .250” (6,4 mm) thick													
.13	3,2	.25	6,4	-	-	.20” (5,1 mm) - .30” (7,6 mm) each cable	<b>S6460</b>	-	SunRunner® Vidrio™ Clip 100 Pack	.99 x .52	25,1 x 13,2	.45	11,4
							<b>S6500</b>	-	SunRunner® Vidrio™ Clip Bulk				
1-2 Wires - SunRunner EZ Clip for panels up to .250” (6,4 mm) thick													
.09	2,3	.25	6,4	-	-	.20” (5,1 mm) - .30” (7,6 mm) each cable	<b>S6407</b>	-	SunRunner® EZ Clip 100 Pack	1.00 x .50	25,4 x 12,7	.41	10,4
							<b>S6447</b>	-	SunRunner® EZ Clip Bulk				

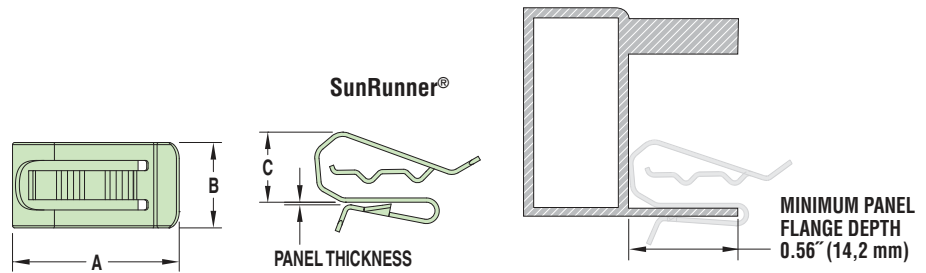

SunRunner® EZ with (optional) UL Approved SunBundler (page 1-11) looped through slot

Quick Specs

Material	.025” thick 304 or 316 stainless steel (SunRunner and SunRunner EZ)
Certifications	cULus Certified by UL for Compliance with both Canadian and US Requirements under File E54523
Temperature Range	-40°F (-40°C) to 572°F (300°C)