

WJ15EDGRC-2.5/2.54  
PLUG-IN TERMINAL BLOCK



PCB connector  
Rated current: 5 A  
Rated voltage: 150 V  
Pitch: 2.5 mm/2.54mm  
Mounting: Wave soldering



UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	-
Rated Current [A]	5	-	-
Wire Range [AWG]	/		
Dielectric Voltage-Withstand	1.3KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	80	160	320
Rated Current [A]	6	6	6
Impulse withstand voltage [KV]	1.5	2.5	2.5
Conductor cross section[solid/flexible] [mm <sup>2</sup> ]	/		

Material

Insulation Material	PA66
---------------------	------

**WJ15EDGRC-2.5/2.54**  
**PLUG-IN TERMINAL BLOCK**


Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

**Other Data**

Pitch/Poles [mm]/[P]	2.5 , 2.54/2~24
Stripping Length [mm]	/
Screw/Torque(Max)[N.m]	
Operating temperature [°C]	-40~+105
Soldering temperature	260°C/5S
Pin dimensions [mm]	0.8*0.8
PCB Hole Diameter [mm]	□1.4

**Dimensions**

**PCB opening diagram**

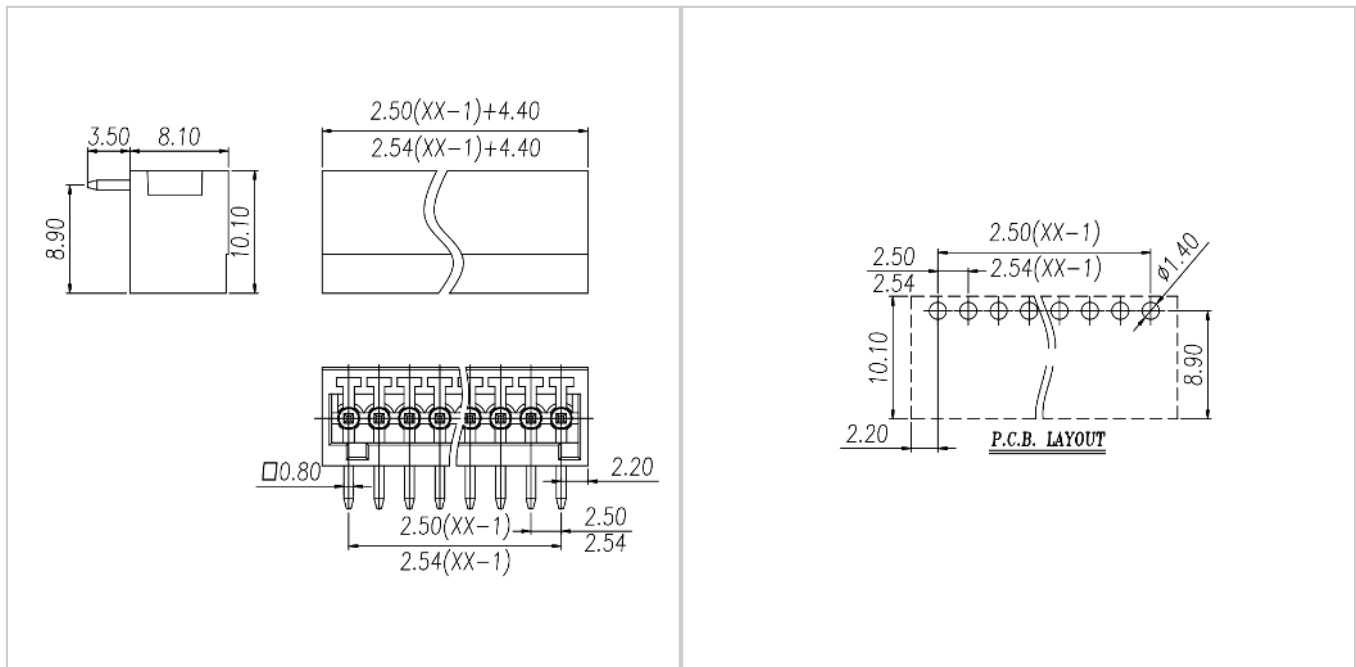

**Accessories**