



DATASHEET

MST-712-□□-5□ Series (3 in 1 LED signal tower)				
Rated Voltage			24VDC	
Current rating for	Permanent Light		Green LED	$\leq 73\text{mA}$
			Yellow LED	$\leq 123\text{mA}$
		Without buzzer	Red LED	$\leq 125\text{mA}$
		With buzzer		$\leq 140\text{mA}$
	Blinking Light		Green LED	33 to 73mA
			Yellow LED	55 to 123mA
		Without buzzer	Red LED	33 to 135mA
		With buzzer		33 to 156mA
Buzzer	Sound decibel		95 dB	
	Tone with	Permanent Light	Fast pulse	
		Blinking Light	Slow pulse	
Selector switch			Permanent or blinking lights	
Operating temperature			-20 C to +50 C	
Life duration			100,000 hr	
Unit dimensions			96 \pm 10mm	
Cable type			AWM UL758	
Total cable length			1m, 2m	
Protection			IP65, PC plastic body	
Certified Standards			CE, RoHS compliant	

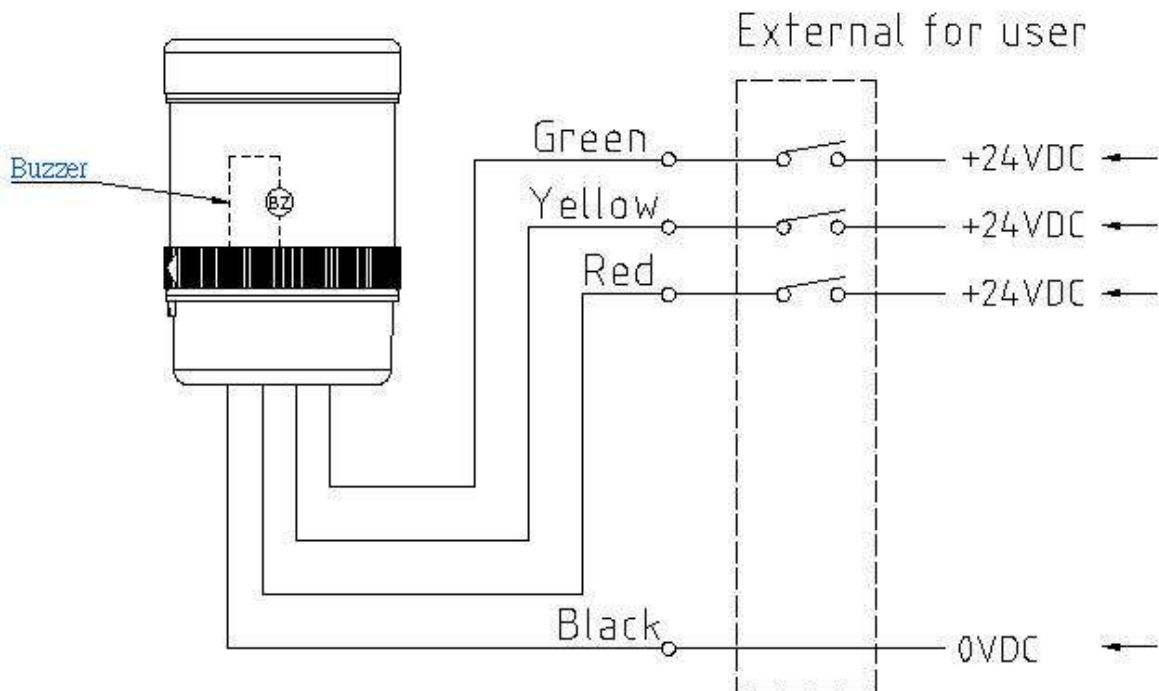

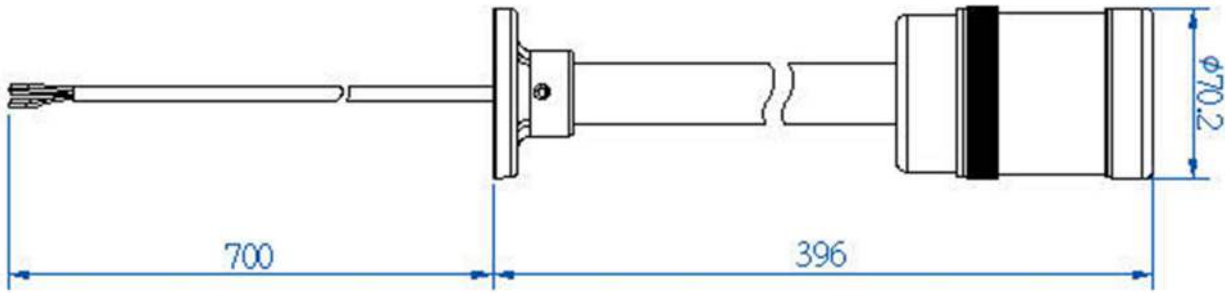

Examples:

 <p>10cm / White Translucent / Black with Silver mount base / Buzzer-less Nomenclature = MST-712-PM-51-KS-7-RYG-1</p>	 <p>10cm / White Transparent / Black with Silver mount base / Buzzer-less Nomenclature = MST-712-PM-51-KS-9-RYG-1</p>
 <p>30cm / White Translucent / Black with Silver mount base / Buzzer-less Nomenclature = MST-712-PM-53-KS-7-RYG-1</p>	 <p>30 cm / White Transparent / Black with Silver mount base / Buzzer-less Nomenclature = MST-712-PM-53-KS-9-RYG-1</p>