

—	G	нт. П	m	O



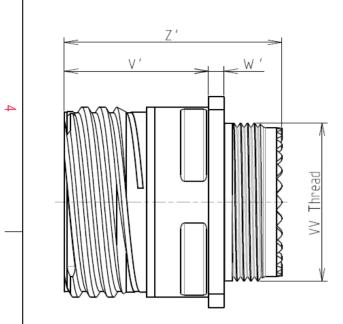

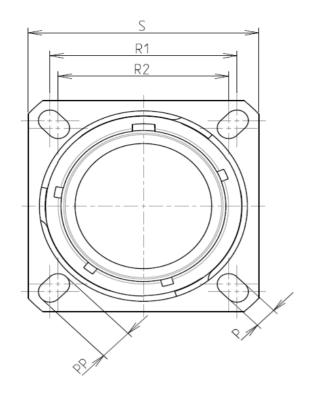

LAYOUT SHOWN AS

Keying Shown as example

L

ΙL

Е

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

\leftarrow			F	
	-Shell Material	: Composite	P	
	-Shell Plating	: Nickel	R	
	-Insulator	: Thermoplastic	R	
	-Contacts	: Copper Alloy	9	
	-Seals & Grommet	: Silicon Elastomer	v	
N	-Contact Plating	: Gold over copper Alloy 0.8μm minimum	Z	
	-Durability	: 500 Mating cycles	VV TH	
	-Delivered without Souriau contacts			
	-Temperature Range	65°C to +200°C		
	-Salt Spray	: 2000 hours		
	-Mass	: 11.7 g ± 10%		
I				

8D 0

G

11

Μ

04

S

F

Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		

Delivered W/O Contacts


CONTACT LAYOUT : 11-04

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : E

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

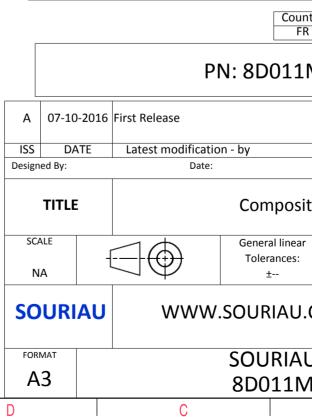

	Ξ		A		
	R				4
S EXA	AMPLE				3
whice er of t idatic untry R	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third part			2
		CUSTOME	R DRAWING	MOD N°	
ite	Receptacl	e 8D seri	es		
ar	NPRDS / PROJECT 859				
I.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1
	DRG N°			SHEET	
V10	4SEL-C		٨	1/2	J
	В		А		

r	Ŧ	۵	н г	m		0	
		Contact Layout					Panel Cutou
4	-×_	$ \begin{array}{c} $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt size no. cont 11 -4 4	V-axis (mm) Y-axis (mm) + 0.65 (1.65) .065 (1.65) + 0.65 (1.65) 065 (1.65) - 0.65 (1.65) 065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65)			₩		ØI_
ω						Dim ØA ØA/ R1 ØT	A Contraction of the second se
	-					SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products whi I by either of
N							Country FR
					ISS DATE	116 First Release	D011N
					Designed By: TITLE SCALE	Co	omposite
_					NA SOURIA		t
					FORMAT A3	SO	URIAU 0011M0
L	Н	G	F	E	D	C	

