




UNIT: mm

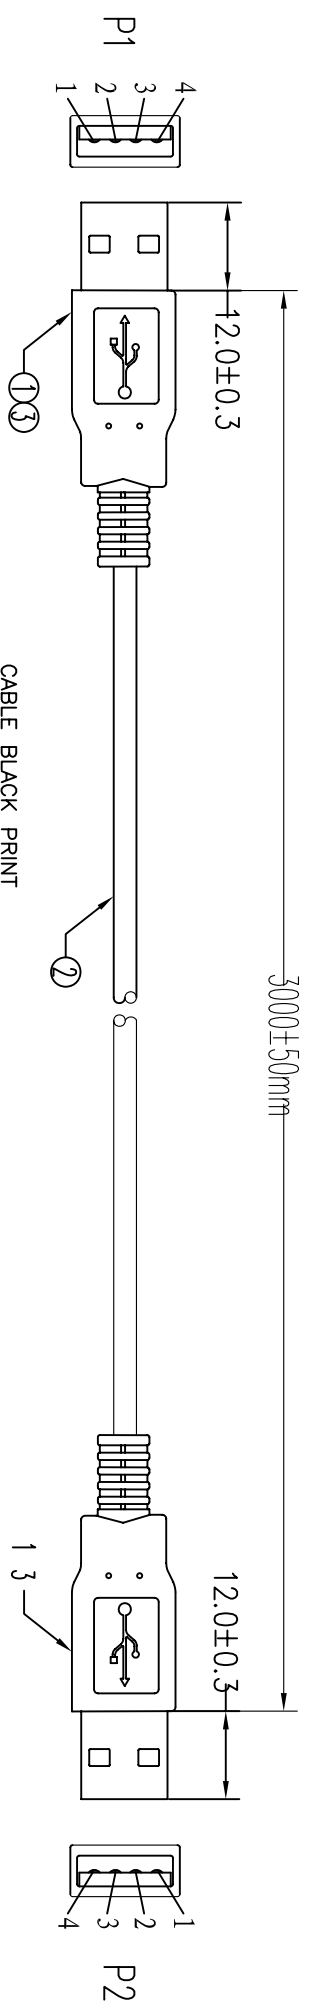

PIN ASSIGNMENT:

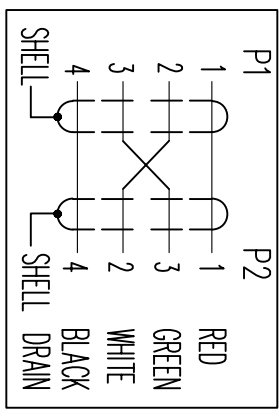

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

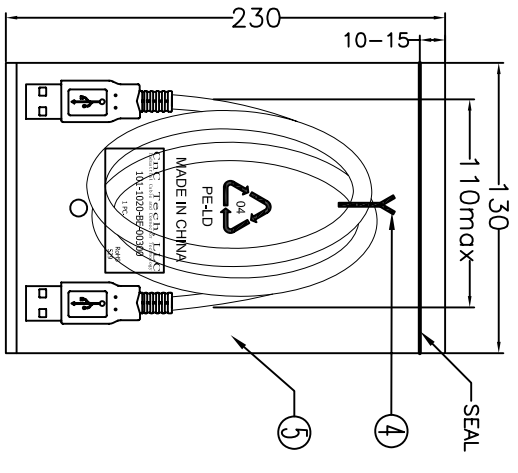

|   |            |      |  |
|---|------------|------|--|
| ① | PE BAG     | 1/10 | CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "10PCS"       |
| ② | PE BAG     | 1    | CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC"         |
| ③ | TIE        | 1    | WHITE L=100mm  |
| ④ | OUT JACKET | 12g  | BEIGE (TV-29#) PVC-40P (MOULD NO: NM-40)                             |
| ⑤ | CABLE      | 1    | BEIGE (TV-29#) USB2.0 UL2725 28#/1P+24#/2C+A&B OD: 4.7mm L=3000±10MM |
| ⑥ | CONN       | 2    | USB2.0 A MALE NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE        |
|   | NO.        |      | NAME   |

|   |     |            |      |            |                   |
|---|-----|------------|------|------------|-------------------|
| <h1 style="text-align: center;">CNC Tech, LLC</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p> |     | DRAWN      | Andy | DRAWING NO |                   |
|   |     | CHECKED    |      | CUSTOMER   |                   |
| APPROVAL  |     |            |      | ITEM NO.   | 101-1020-BE-00300 |
| DECIDED   |     |            |      | DATE       | 2013-8-23         |
| VERSIONS/EDITION  | A/0 | PROJECTION |      |            |                   |

4 3 2 1