

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				

<b>APPLICATION STANDARD</b>		OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C
<b>RATING</b>		VOLTAGE	AC 50 V	OPERATING HUMIDITY RANGE	RELATIVE HUMIDITY: 95% MAX (NO DEW CONDENSATION IS PERMITTED)
<b>CURRENT</b>			0.3 A		

**SPECIFICATIONS**

ITEM	TEST METHOD	REQUIREMENT	QTY	AT
<b>CONSTRUCTION</b>				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING	X	X
MARKING	CONFIRMED VISUALLY.		X	X
<b>ELECTRICAL CHARACTERISTICS</b>				
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz)	60 mΩ MAX	X	X
INSULATION RESISTANCE	100 V DC.	100 MΩ MIN.	X	—
VOLTAGE PROOF	150 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	X
<b>MECHANICAL CHARACTERISTICS</b>				
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 69.6 N MAX WITHDRAWAL FORCE: 2.9 N MIN	X	—
MECHANICAL OPERATION	50 TIMES INSERTION AND EXTRACTIONS.	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	—
VIBRATION	FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, — m/s <sup>2</sup> AT 10 CYCLES FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	—
SHOCK	490 m/s <sup>2</sup> DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		X	—

<b>ENVIRONMENTAL CHARACTERISTICS</b>				
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90~95 %, 96 h.	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN.	X	—
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→-15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3 min. UNDER 5 CYCLES.	3) NO DAMAGE, CRACK AND LOOSENESS OF PART	X	—
DRY HEAT	EXPOSED AT 85 °C, 96 h.	1) CONTACT RESISTANCE: 70 mΩ MAX.	X	—
COLD	EXPOSED AT -55 °C, 96 h.	2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	—
CORROSION SALT MIST	EXPOSED IN 5% SALT WATER SPRAY FOR 48 h.	NO HEAVY CORROSION.	X	—
SULPHUR DIOXIDE	EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090)	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO HEAVY CORROSION	X	—
RESISTANCE TO SOLDERING HEAT	REFLOW RECOMMENDED TEMPERATURE PROFILE	NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT.	X	—

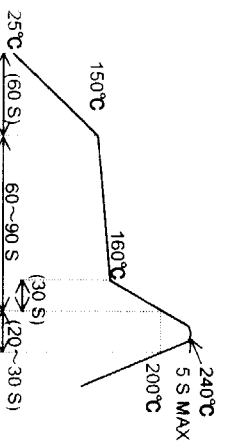

<b>SOLDERABILITY</b>	TO BE TESTED UNDER THE ABOVE CONDITIONS SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.	NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.	X	—
----------------------	--	--	---	---

<b>REMARKS</b>		<b>DRAWN</b>	<i>M. Takahashi</i>	<b>DESIGNED</b>	<i>M. Takahashi</i>	<b>CHECKED</b>	<i>M. Takahashi</i>	<b>APPROVED</b>	<i>M. Takahashi</i>	<b>RELEASED</b>
UNLESS OTHERWISE SPECIFIED, REFER TO JIS C 5402.			99.10.27		99.10.27		99.10.28		99.10.28	
<b>NOTE</b>	QT: QUALIFICATION TEST	AT: ASSURANCE TEST	X: APPLICABLE TEST							

<b>HRS</b>	HIROSE ELECTRIC CO., LTD.	<b>SPECIFICATION SHEET</b>	PART NO.	<b>FX11LB - 116P - SV (22)</b>
CODE NO. (OLD)	DRAWING NO.	ELC4 - 152106 - 02	CODE NO.	CL 573 - 0054 - 0 - 22
CL				

TO  
PCK