

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

## MATERIAL

Matte anodised aluminium.

## MOUNTING

By means of three supplied self-tapping rivets for fitting to control knobs IZN.381 (see page 422).

## STANDARD EXECUTIONS


- **F.N**: plain flange.
- **F.K**: flange with triangular black index.
- **F.GS**: flange with black graduation (marks and numbers).
- **F.32 GS e F.40 GS**: 40 marks, numbering 0, 1, 2 .... 9 increases as the knob is turned clockwise.
- **F.45, 50, 63 GS**: 100 marks, numbering 0, 1, 2 .... 9 increases as the knob is turned clockwise.

## SPECIAL EXECUTIONS ON REQUEST

On the surface of the flanges other kinds of precision graduations can be laser-engraved (see Graduations on page 439), numbers, graphic symbols, etc.



Conversion Table	
1 mm = 0.039 inch	
D	
mm	inch
32	1.25
42	1.63
48	1.87
52	2.03
63	2.46

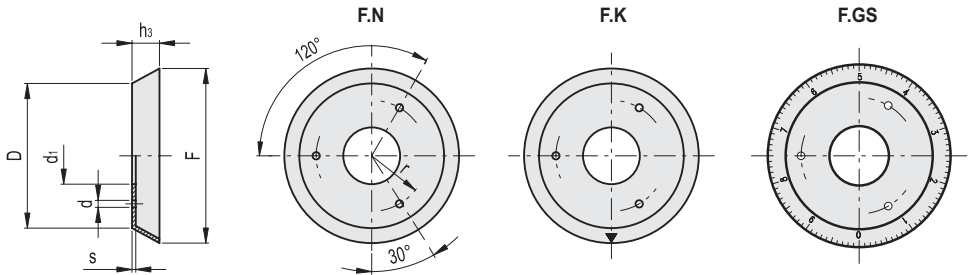

## F.N

Code	Description	D	F	d	d1	h3	s	r	⚖
29002	F.32 N	32	38	2.1	15	6	0.8	9.5	3
30102	F.40 N	42	50	3	18	7	1	14	7
30202	F.45 N	48	55	2.7	22	7	1	15.8	8
30302	F.50 N	52	63	2.7	22	9	1	18.1	10
30452	F.63 N	63	78	2.7	26	13	1	22.7	16

## F.K

Code	Description	D	F	d	d1	h3	s	r	⚖
29004	F.32 K	32	38	2.1	15	6	0.8	9.5	3
30104	F.40 K	42	50	3	18	7	1	14	7
30204	F.45 K	48	55	2.7	22	7	1	15.8	8
30304	F.50 K	52	63	2.7	22	9	1	18.1	10
30454	F.63 K	63	78	2.7	26	13	1	22.7	16

## F.GS

Code	Description	D	F	d	d1	h3	s	r	⚖
29003	F.32 GS-10/40	32	38	2.1	15	6	0.8	9.5	3
30103	F.40 GS-10/40	42	50	3	18	7	1	14	7
30203	F.45 GS-10/100	48	55	2.7	22	7	1	15.8	8
30303	F.50 GS-10/100	52	63	2.7	22	9	1	18.1	10
30453	F.63 GS-10/100	63	78	2.7	26	13	1	22.7	16