



# ULTRA LOW POWER NXP i.MX 8X SERIES

## conga-QMX8-X

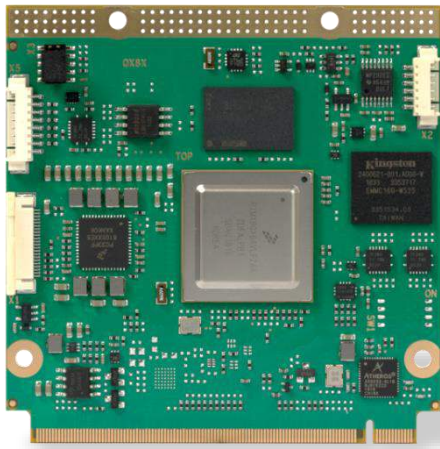


- NXP i.MX 8X processor series with ARM Cortex-A35 / M4F core complex
- Ultra low power architecture with 2-5W
- Highest reliability and improved virtualization
- Support for two independent HD displays
- Extended longevity up to 15 years
- Temperature range up to -40°C .. +85°C



<b>Form factor</b>	Qseven Rev. 2.1			
<b>CPU</b>	<b>NXP i.MX8-X ARM Processors</b>			
		<b>ARM Cortex-A35</b>	<b>ARM Cortex-M4F</b>	<b>GPU</b>
	i.MX 8QuadXPlus	4x	1x	1x GC7000Lite
	i.MX 8DualXPlus	2x	1x	1x GC7000Lite
<b>DRAM</b>	Up to 4 GByte onboard LPDDR4 memory   2400 MT/s			
<b>Ethernet</b>	1x Gbit Ethernet with IEEE 1588 support			
<b>I/O Interfaces</b>	Up to 4x USB 2.0 (1x shared with USB OTG client)   1x USB 3.0   1x SDIO 3.0   1x PCIe 3.0   I <sup>2</sup> C Bus   SPI   2x UART (1x with Handshake, 1x on MFG pins)   1x FlexCAN   GPIOs			
<b>Mass Storage</b>	eMMC 5.1 up to 128 GByte			
<b>Sound</b>	I2S   optional processor with HiFi 4 DSP			
<b>Graphics</b>	Integrated in NXP i.MX 8X Series GC7000Lite multimedia GPU VPU up to 4K h.265 dec / 1080p h.264 enc/dec   3D Graphics with up to 4 high performance vec4 shaders and 16 execution units   up to 2 independent displays   OpenGL ES 3.1   Vulkan VX extensions   OpenCL 1.2 EP   OpenVG 1.1			
<b>Video Interfaces</b>	1x dual channel or 2x single channel LVDS 24 bit   opt. HDMI 1.3 through bridge (shared with 2 <sup>nd</sup> LVDS channel)   2x MIPI-DSI with 4-lanes shared with LVDS   1x MIPI-CSI2 4-lanes			
<b>Features</b>	Watchdog Timer   I <sup>2</sup> C bus 400 kHz   Cortex-A35 Console   optional JTAG debug interface   High Precision Real Time Clock			
<b>Virtualization</b>	Hardware Virtualization with Domain Separation   Multiple Operating System Support			
<b>Security</b>	High Assurance Boot support, SHE   Inline Encryption Engine (AES-128)   TRNG, AES-128, AES-256, 3DES, ARC4, RSA4096, SHA-1, SHA-2, SHA-256, MD-5   RSA-1024, 2048, 3072, 4096 and secure key storage			
<b>Boot Loader</b>	U-Boot			
<b>Operating Systems</b>	Linux   Yocto Linux   Android			
<b>Power Consumption</b>	Ultra Low Power Cortex A-35   Typ. application 2-5W @ 5V			
<b>Temperature Range</b>	Operating Temperature Range:	0 to +60°C commercial grade -40 to +85°C industrial grade		
	Storage Temperature Range:	-40 to +85°C		
<b>Humidity</b>	Operating: 10 - 90% r. H. non condensing	Storage: 5 - 95% r. H. non condensing		
<b>Size</b>	70 x 70 mm (23/4" x 23/4")			

# conga-QMX8-X | Block Diagram

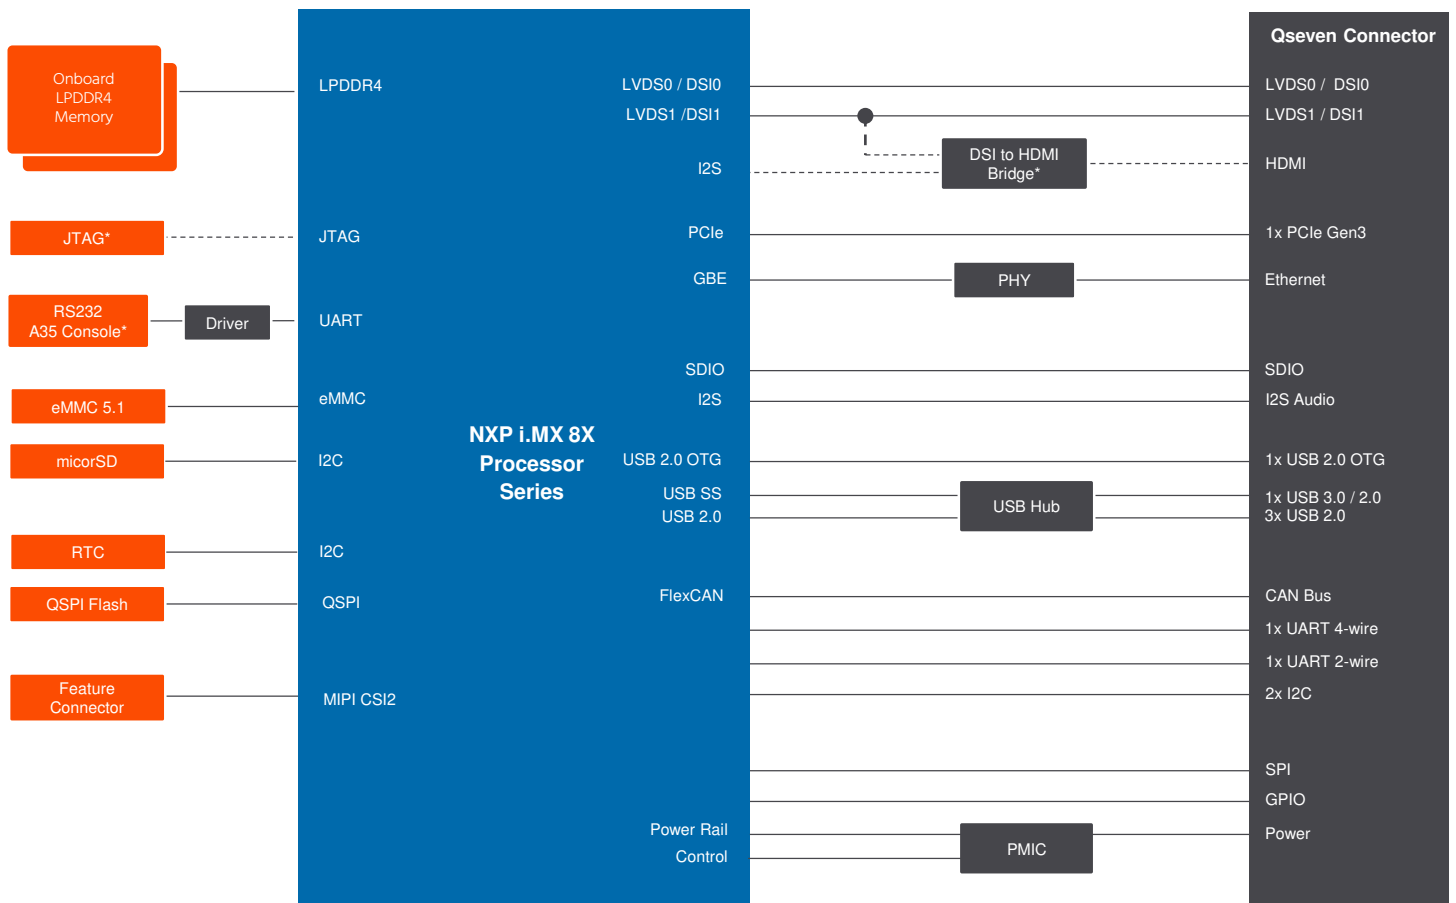

\* Assembly Option

# conga-QMX8-X | Order Information

Article	PN	Description
conga-QMX8-X/QXP-4G eMMC16	016500	Qseven module with ultra low power NXP i.MX 8QuadXPlus processor with 4x ARM Cortex-A35 and 1x ARM Cortex-M4F, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Commercial temperature range.
conga-QMX8-X/DXP-2G eMMC16	016501	Qseven module with ultra low power NXP i.MX 8DualXPlus processor with 2x ARM Cortex-A35 and 1x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Commercial temperature range.
conga-QMX8-X/QXP-2G eMMC16	016503	Qseven module with ultra low power NXP i.MX 8QuadXPlus processor with 4x ARM Cortex-A35 and 1x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Commercial temperature range.
conga-QMX8-X/QXP-4G eMMC16/HDMI	016504	Qseven module with ultra low power NXP i.MX 8QuadXPlus processor with 4x ARM Cortex-A35 and 1x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Features HDMI bridge. Commercial temperature range.
conga-QMX8-X/i-QXP-4G eMMC16	016510	Qseven module with ultra low power NXP i.MX 8QuadXPlus processor with 4x ARM Cortex-A35 and 1x ARM Cortex-M4F, 4GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial temperature range.
conga-QMX8-X/i-DXP-2G eMMC16	016511	Qseven module with ultra low power NXP i.MX 8DualXPlus processor with 2x ARM Cortex-A35 and 1x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial temperature range.
conga-QMX8-X/i-QXP-2G eMMC16	016513	Qseven module with ultra low-power NXP i.MX 8QuadXPlus processor with 4x ARM Cortex-A35 and 1x ARM Cortex-M4F, 2GB onboard LPDDR4 memory and 16GB onboard eMMC. Industrial temperature range.
conga-QMX8-X/i-CSP-B	016550	Passive cooling solution for Qseven module conga-QMX8-X with lidded NXP i.MX 8X ARM processor. All standoffs are with 2.7mm bore hole.
conga-QMX8-X/i-CSP-T	016551	Passive cooling solution for Qseven module conga-QMX8-X with lidded NXP i.MX 8X ARM processor. All standoffs are with M2.5mm thread.
conga-QMX8-X/i-HSP-B	016552	Heat spreader solution for Qseven module conga-QMX8-X with lidded NXP i.MX 8X ARM processor. All standoffs are with 2.7mm bore hole.
conga-QMX8-X/i-HSP-T	016553	Heat spreader solution for Qseven module conga-QMX8-X with lidded NXP i.MX 8X ARM processor. All standoffs are with M2.5mm thread.
conga-QEVAL/Qseven 2.0 ARM	007005	Evaluation carrier board for Qseven ARM modules.