


PART NO. SEE CHART
 DWG. NO. SDA-90574

- NOTES: 1. MATERIAL:
 HOUSING: POLYESTER, G.F. (UL 94V-0), COLOUR - BLACK.
 TERMINAL: PHOSPHOR BRONZE.
2. TERMINAL PLATING:
 90574-***1 : CONTACT AREA: GOLD FLASH (0.1um)/4uin MIN.
 (GS1) I.D. AREA: TIN-LEAD (1um)/39uin MIN. OVER
 NICKEL (1um)/39uin MIN. PLATING I.D. MARK: YELLOW.
 90574-***2 : CONTACT AREA: GOLD (0.76um)/30uin MIN
 (GS2) I.D. AREA: TIN-LEAD (1um)/39uin MIN. OVER
 NICKEL (1um)/39uin MIN. PLATING I.D. MARK: BROWN.
 90574-***3 : CONTACT AREA: GOLD (0.25um)/10uin MIN
 (GS3) I.D. AREA: TIN-LEAD (1um)/39uin MIN. OVER
 NICKEL (1um)/39uin MIN. PLATING I.D. MARK: BLUE.
 90574-***5 : CONTACT AREA: GOLD (0.36um)/15uin MIN
 (GS5) I.D. AREA: TIN-LEAD (1um)/39uin MIN. OVER
 NICKEL (1um)/39uin MIN. PLATING I.D. MARK: RED.
 90574-***9 : HOT TIN LEAD DIP (1.0-2.5 um) / 40-100 uin.
 I.D. MARK: BLACK
3. FOR USE WITH No. 26 & 28 AWG STRANDED WIRE (7 CONDUCTORS)
 AND No. 28 SOLID WIRE 1.14/(.045) DIA. MAX. INSULATION RIBBON
 CABLE WITH 1.27/(.050) CENTERS.
4. MATING STRAIN RELIEF: MOLEX No. 90170.
5. DIMENSION "E" IS TOTAL HEIGHT AFTER ASSEMBLED WITH CABLE.
 E = (10.2)/.402 REF. WITHOUT STRAIN RELIEF.
 E = (15.2)/.598 MAX. WITH STRAIN RELIEF No. 90170,
 AND (14.5)/.571 REF. WHEN COMPRESSED .
6. PRODUCT SPECIFICATION NUMBER : PS 99020-0016.

NO. OF CKT.	ENG. NO.	A	B	C	D REF.
64	90574-064*	(78.74) 3.100	(82.54) 3.250	(82.71) 3.256	(85.91) 3.382
60	90574-060*	(73.66) 2.900	(77.46) 3.050	(77.63) 3.056	(80.83) 3.182
50	90574-050*	(60.96) 2.400	(64.76) 2.55	(64.93) 2.556	(68.13) 2.682
40	90574-040*	(48.26) 1.900	(52.06) 2.050	(52.23) 2.056	(55.43) 2.182
34	90574-034*	(40.64) 1.600	(44.44) 1.750	(44.61) 1.756	(47.81) 1.882
30	90574-030*	(35.56) 1.400	(39.36) 1.550	(39.53) 1.556	(42.73) 1.682
26	90574-026*	(30.48) 1.200	(34.28) 1.350	(34.45) 1.356	(37.65) 1.482
20	90574-020*	(22.86) .900	(26.66) 1.050	(26.83) 1.056	(30.03) 1.182
16	90574-016*	(17.78) .700	(21.58) .850	(21.75) .856	(24.95) .982
14	90574-014*	(15.24) .600	(19.04) .750	(19.21) .756	(22.41) .882
10	90574-010*	(10.16) .400	(13.96) .550	(14.13) .556	(17.33) .682

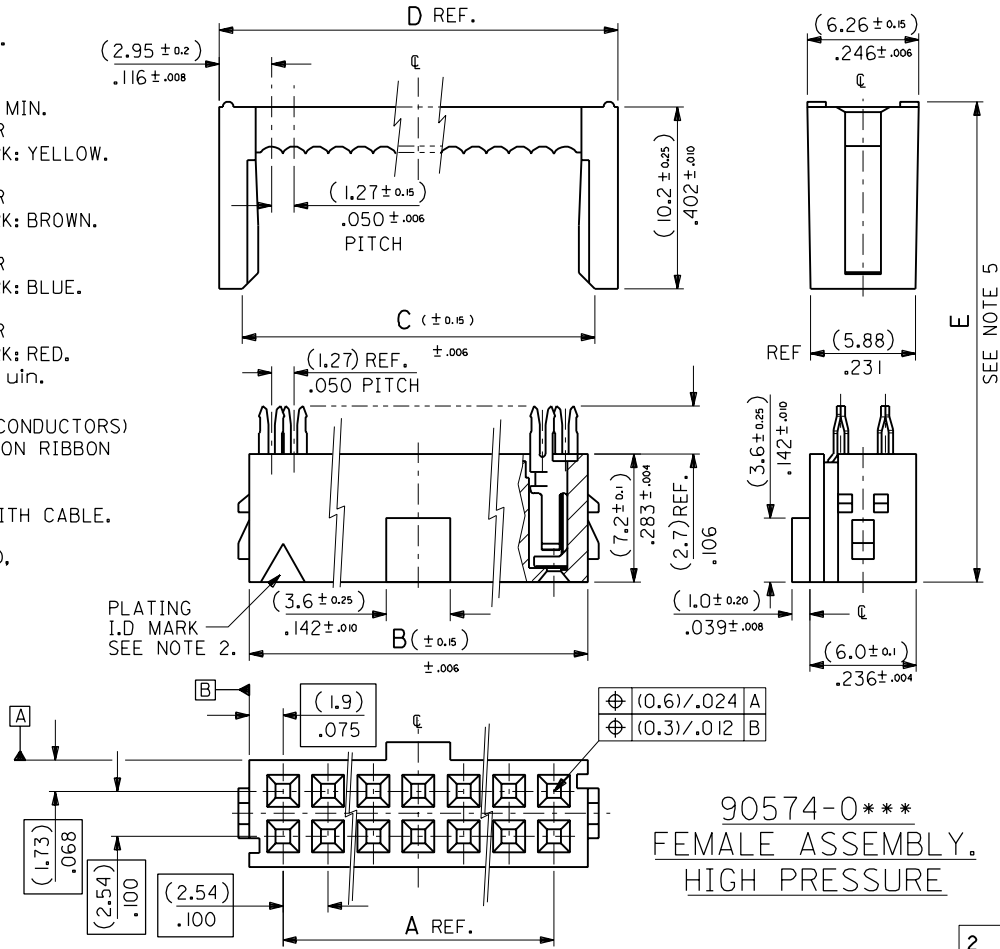

FOR PREVIOUS DRAWING ISSUES SEE MRI.

OLIVETTI APPROVAL
 ECN E30020
 26 AUGUST 1992 SM

REVISIONS

NO.	DESCRIPTION	DATE
1	3 PLACE ± .	
2	2 PLACE ± .	
3	1 PLACE ± .	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION (PRIMARY) IN. (SECONDARY) MM

EQUIVALENT DIMENSION (SECONDARY) IN. (PRIMARY) MM

DRWG BY: PR
 CHK'D BY:
 APP'D BY:
 SCALE: 4:1

REVISE ONLY ON CAD SYSTEM

CAD/CAM FILENAME: SA90574X1 DGN

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE: QIK-FLECS IMPROVED WIPING LENGTH FEMALE ASSEMBLY, HIGH PRESSURE

MOLEX EUROPE SHEET NO. DATE: 10F2 90/08/23

PART NO. SEE CHART DWG. NO. SDA-90574 SIZE B