


REV. 0
DCO 170668

COIL: @ 25°C	
RESISTANCE	5000 OHMS: ±10%
NOMINAL VOLTAGE	6.0 mADC
MUST OPERATE	2.8 mADC
MUST RELEASE	1.4 mADC MAX 0.30 mADC MIN

ENVIRONMENT:	
VIBRATION	10 Hz TO 2000 Hz @ 15 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE TIME 15 MS MAX.
	RELEASE TIME 10 MS MAX.
	CONTACT BOUNCE 2 MS MAX.

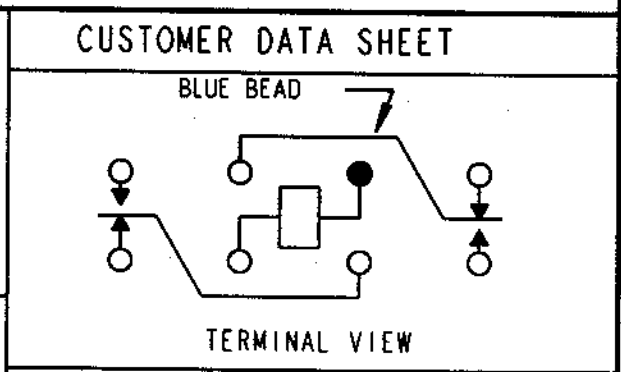

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	100,000 OPERATIONS

DR. ASB 11 JUN 02 CK. *[Signature]*

CII Technologies
advanced control electronic solutions

CUST. QPL	3SAT RELAY
CUST. NO. M5757/13-141 REV.	

3SAT1358A2