

F3 MAX-LOC NUT FOR MESH

STAINLESS STEEL SCREWS W/LOCK WASHER (6) REQ'D


STAINLESS STEEL SCREWS W/FLAT WASHER 1ST AND O'RING

TWO POSITION SELECTOR SWITCH (505SS-2)

SINGLE SPEED, MOMENTARY, NO (505SW-H)

BLANK (505BLNK)

MAINTAINED E-STOP NO/NC (505B-RM)

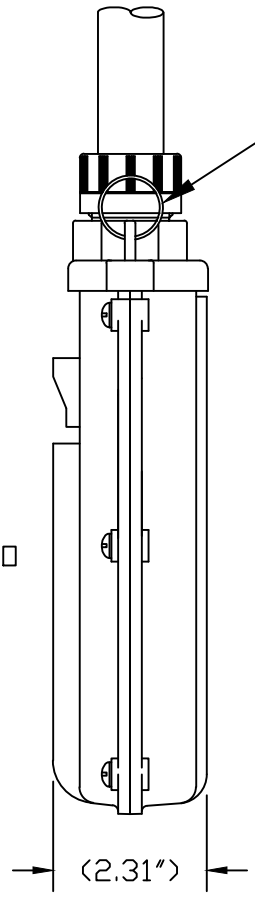

STAINLESS STEEL SUPPORT RINGS (2) REQ'D

(1.18")
BETWEEN CENTERS

(9.77")

(3.52")

(2.31")

- NOTES:
1. INSTALLATION INSTRUCTIONS, BUTTON ID. LABELS. ARE PACK WITH THE PART.
 2. ALL BUTTONS ARE HIGH AMBIENT, CHEMICALLY RESISTANT MATERIAL - COLOR BLACK

RELEASE CUSTOMER DWG EC NO: IFC2015-1254 DRWN: HRUIZ01 2015/01/12 CHKD: BARDEN 2015/01/12 APPR: JFMURPHY 2015/02/18	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES	mm	INCH	DRAWN BY	DATE	TITLE 5054 PENDANT STATION W/ (505SS-2) (505SW-H) (505BLNK) & (505B-RM)				
		3 PLACES	±---	±---	HRUIZ01	2015/01/12					
		2 PLACES	±---	±.005	CHECKED BY	DATE	MATERIAL NO. 130126-0353 DOCUMENT NO. SD-130126-068 SHEET NO. 1 OF 1				
1 PLACE	±---	±.010	BARDEN	2015/01/12							
ANGULAR ±1/2°			APPROVED BY	DATE	MOLEX INCORPORATED						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			JFMURPHY	2015/02/18							
SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									