Alle Rechte vorbehalten/ *All rights reserved*

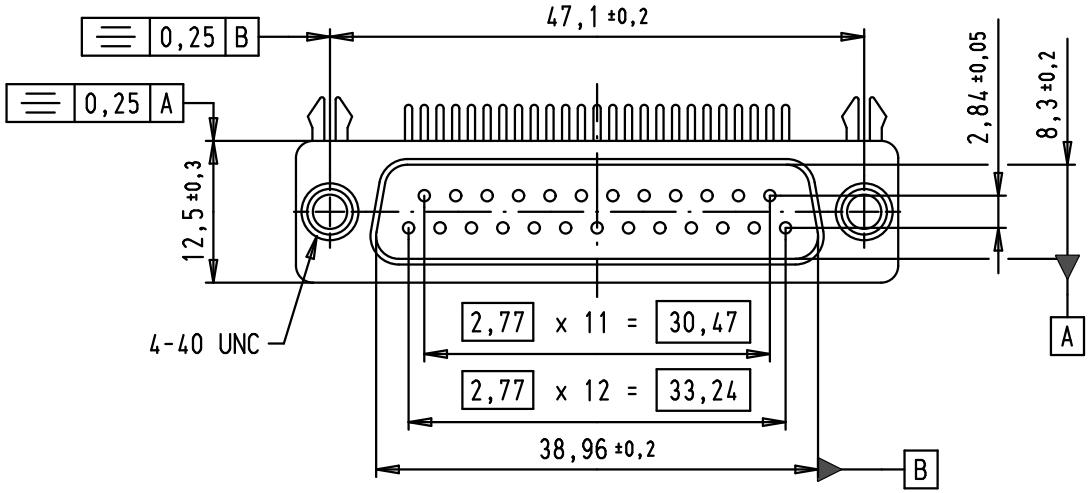

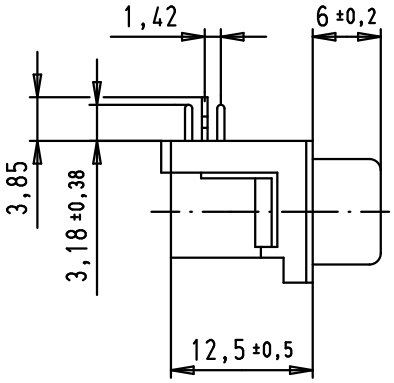

SPECIFICATIONS

FREQUENCY (MHz)	ATTENUATION (dB)
5	1
10	2
50	4
100	4,5
500	4,5
1000	4,5

Operating voltage	< 250 V AC
Working current	< 7,5 A
Insulation resistance	> 1GΩ
Contact resistance	< 15 mΩ
Dielectric withstanding voltage	500 V AC / minute

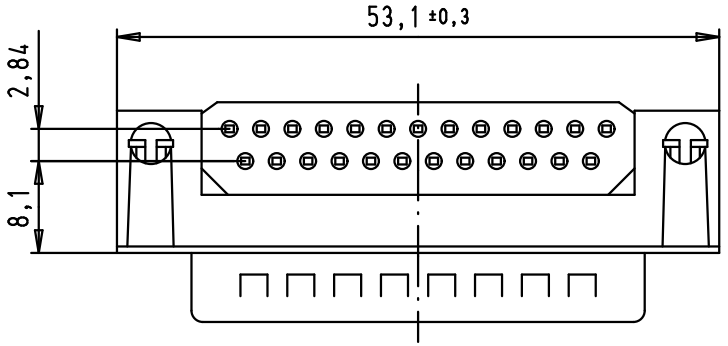

PCB layout, component side,
thickness between 1,6 and 3 mm

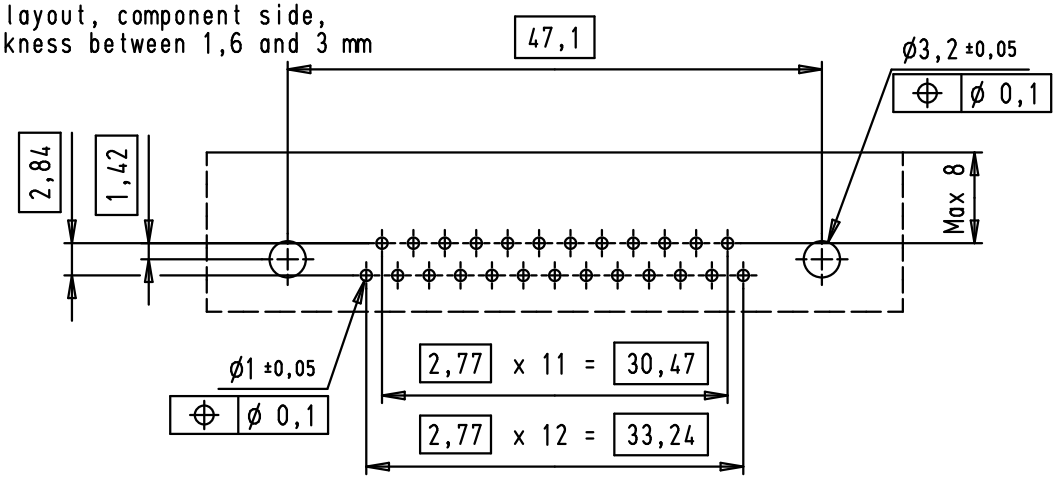

				Dat.	Name		
			Detail.	02/07/09	PK	All Dim. in mm Orig. Size DIN A 4	D-Sub, male, angled, US footprint, 25 poles, tin plated shell with dimples, solder pins, ferrite filter
			Insp.				Maßstab/ *Scale* 1,5:1
			Stand.				
EC02296	06/09/10	SC	HARTING EURL F-95972 Paris			TB 09 64 323 7802	Blatt/ *Page* 1/1
EC00362	02/07/09	PK				Sub.	
Mod.	Dat.	Name					

09 64 323 7802	PL3
Part number	Performance level