



TE CONNECTIVITY CAT5E


RAIL DATA CABLE


FEATURES AND BENEFITS

- Railway compliant to EN45545-2.
- Quad design consisting of two pairs of 22-AWG.
- Pre-assembled cable assemblies available for fast installation.
- Ruggedized outer jacket in cross linked polyethylene suitable for tough environments with excellent resistance to chemicals, mechanical stresses and temperature extremes.
- Designed for an operating voltage of 300 V.
- High speed category 5e or 7 cable.
- TE offers a full range of data cables, from 120 ohm to 10 Gb/s.

PRODUCT APPLICATIONS

- Public transportation.
- Railway.
- Tram.
- Metro.
- Heavy industrial applications.

Cable Specifications	
	 TE Cat 5^e cable
Part Number	2320808-1
No of conductors	4
No of pairs	2 (Quad Core)
Cross section	22 AWG
Temp range	-40°C to +90°C
Construction	SFTP Insulation: Colour coded thermoplastic Conductor: Stranded, tin plated copper Inner Sheath: Low smoke, fire retardant, zero Halogen Black Shield 1: Alumised polyester tape Shield 2: Tinned copper braid Jacket: Low smoke, fire retardant, zero halogen EM104 TE Blue
Features	Flame retardant, halogen free, low toxicity, low smoke, oil resistant, fuel resistant
Standards	EN45545-2 R15/R16 - Hazard level 3, ANSI/TIA-568-C.2, DIN 5510-2

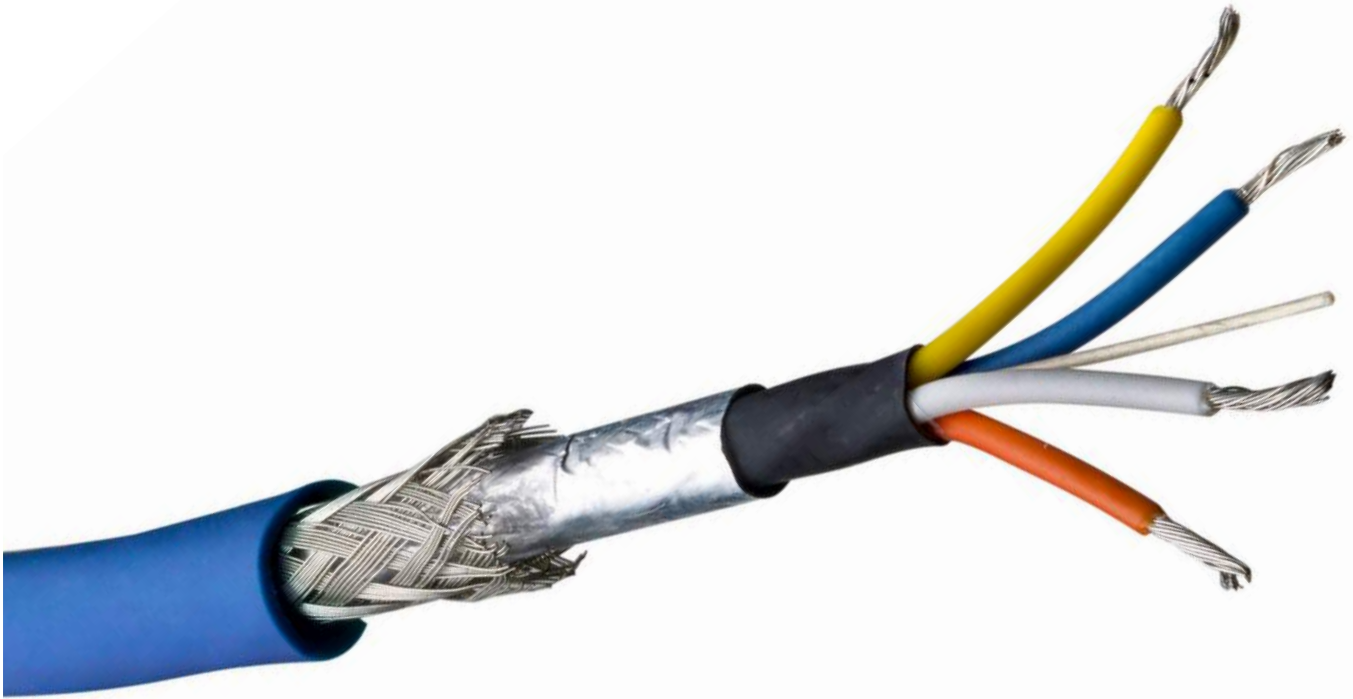

CAT5E DATA CABLE

A Category 5e (Cat5e) quad high speed data cable for railway rolling stock and infrastructure. With its halogen-free flame retardant polymer insulation, the cable complies with EN45545-2, the new European standard covering fire behavior of materials and products in railway rolling stock. This is because its crosslinked outer jacketing provides high resistance to chemicals, mechanical stress and extreme temperatures. It can be supplied on it's own or in pre-assembled assemblies with connectors, for ease and speed of installation.

The new Cat5e data cable is a quad design consisting of two pairs of 22-AWG cores. It is designed for an opening voltage of 300 V. The electrical resistance of the conductor is less than or equal to 60 km, and that of the shield is up to 120 km. The insulation has a resistance of over 500 M /km (all at 20 degrees celsius).

Up to

1Gb

Data Transmission
Speed

Ruggedized
outer jacket

EN45545-2
Compliant

LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. Just call your local support number or visit www.te.com/industrial to chat with a Product Information Specialist.

TECHNICAL SUPPORT

te.com/support-center

Australia	+86 400-820-6015	Hungary	+36 1-2892040	Portugal	+34 91-6630420
Austria	+43 1-9056-0	India	+86 400-820-6015	Russia	+74 95-790-2200
Belgium	+31 73-6246999	Ireland	+1 800-882-391	Slovakia	+42 02-720-11102
Brazil	+55 11-2103-6000	Italy	+39 011-4012111	Slovenia	+38 615-602-132
China	+86 400-820-6015	Japan	+044-844-8052	South Africa	+97 150-457-0806
Czech Republic	+42 02-7201-1103	Korea	+02-3415-4607	Spain	+34 932-910-330
Denmark	+46 8-5072-5000	Latvia	+37 2-6778-673	Sweden	+46 8-5072-5000
Estonia	+37 2677-8673	Lithuania	+37 037426900	Switzerland	+41 71-447-0447
Finland	+46 8-5072-5000	Luxembourg	+31 73-6246999	Taiwan	+86 400-820-6015
France	+33 1-34-20-8686	The Netherlands	+31 73-6246999	Turkey	+90 212-282-6053
Germany	+49 6151-607-1999	New Zealand	+86 400-820-6015	United Kingdom	+44 800-267666
Greece	+97 1-4-347-0226	Norway	+46 8-5072-5000	USA	800-522-6752
Holland	+31 73-6246999	Poland	+48 22-4576750		

te.com

TE Connectivity, TE Connectivity (logo), Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

© 2018 TE Connectivity. All Rights Reserved.
1-1773947-8 CC 0418

PRODUCT CATALOGUE

TE Connectivity
Wire & Cable