

### FEATURES:

- High Lumen Output
- Long Life
- Diffused Lens
- Mercury Free
- Directional Efficiency
- Lead Free
- Low Profile
- No UV

The Terrace features a durable extruded black aluminum housing and a diffused lens for maximized light output uniformity.

### SPECIFICATIONS

Color Temperature	Lumen Output	Efficacy (lm/W)	Color Rendering Index (CRI)
Cool (C) - 6500K	240	75	70
Neutral (N) - 4500K	225	71	76
Warm (W) - 3000K	220	65	80


Rated Life:	50,000 hours
Beam Angle:	120°
Power Consumption:	3.5 Watts
Operating Temperature:	0° C ~+ 40° C
Voltage Input:	24VDC, Constant Voltage
Controls:	See Accessory SW-1001
Housing:	Extruded Aluminum, Black Polycarbonate Lens, Clear
Weight (g):	65
Dimensions:	W .77" (19.6mm) H .91" (23.2mm) L 6" (152.4mm) ** **not including mounts

Compliance:



Restriction of Hazardous Substances Directive (RoHS) implements EU Directive 2002 / 95 which bans placing electrical and hazardous equipment that contains more than agreed levels of hazardous substances on the EU market. For a list of these substances, visit [www.rohs.gov.uk](http://www.rohs.gov.uk).

### DIMENSIONS

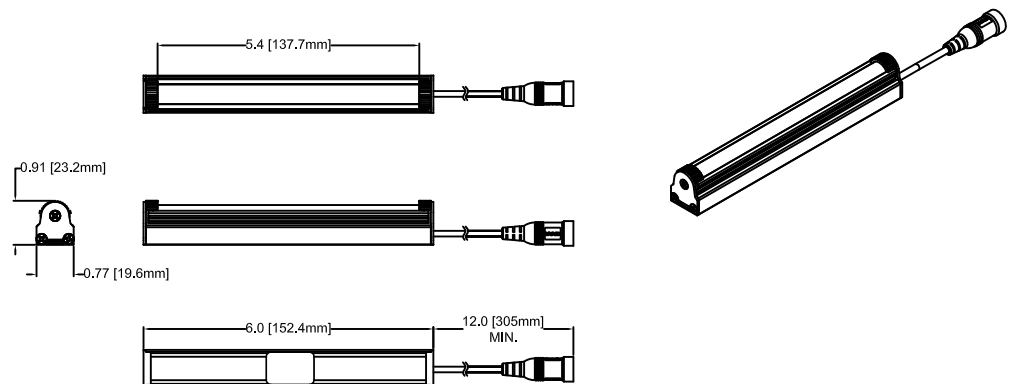

# TERRACE SERIES

## T2200 STANDARD (S-06)

### ORDERING INFORMATION

Choose the option that best suits your needs and write its corresponding code on the appropriate line to form product code.

Model	Color	Type	Example
T2200	C - 6500K N - 4500K W - 3000K	S-06 Standard, 6"	T2200-C-S-06

All luminaires are easily customizable. Please contact us to inquire about customizing a luminaire to fill your needs.

Order power accessories as separate catalog numbers from the Accessories section below.  
(Note: 2 mounting screws and double sided tape included for mounting of Standard luminaires)

### ACCESSORIES

Universal Regulated Quick Connect Power Supply (North American Plug)

Universal Regulated Quick Connect Power Supply (Euro Plug)

In-line On/Off Switch

Califia Lighting Part #WA-UL-001

Califia Lighting Part #WA-VDE-001

Califia Lighting Part #SW-1001

### PHOTOMETRY CHARACTERISTICS

