



used for: DIN EN 60603 TYPE "R"

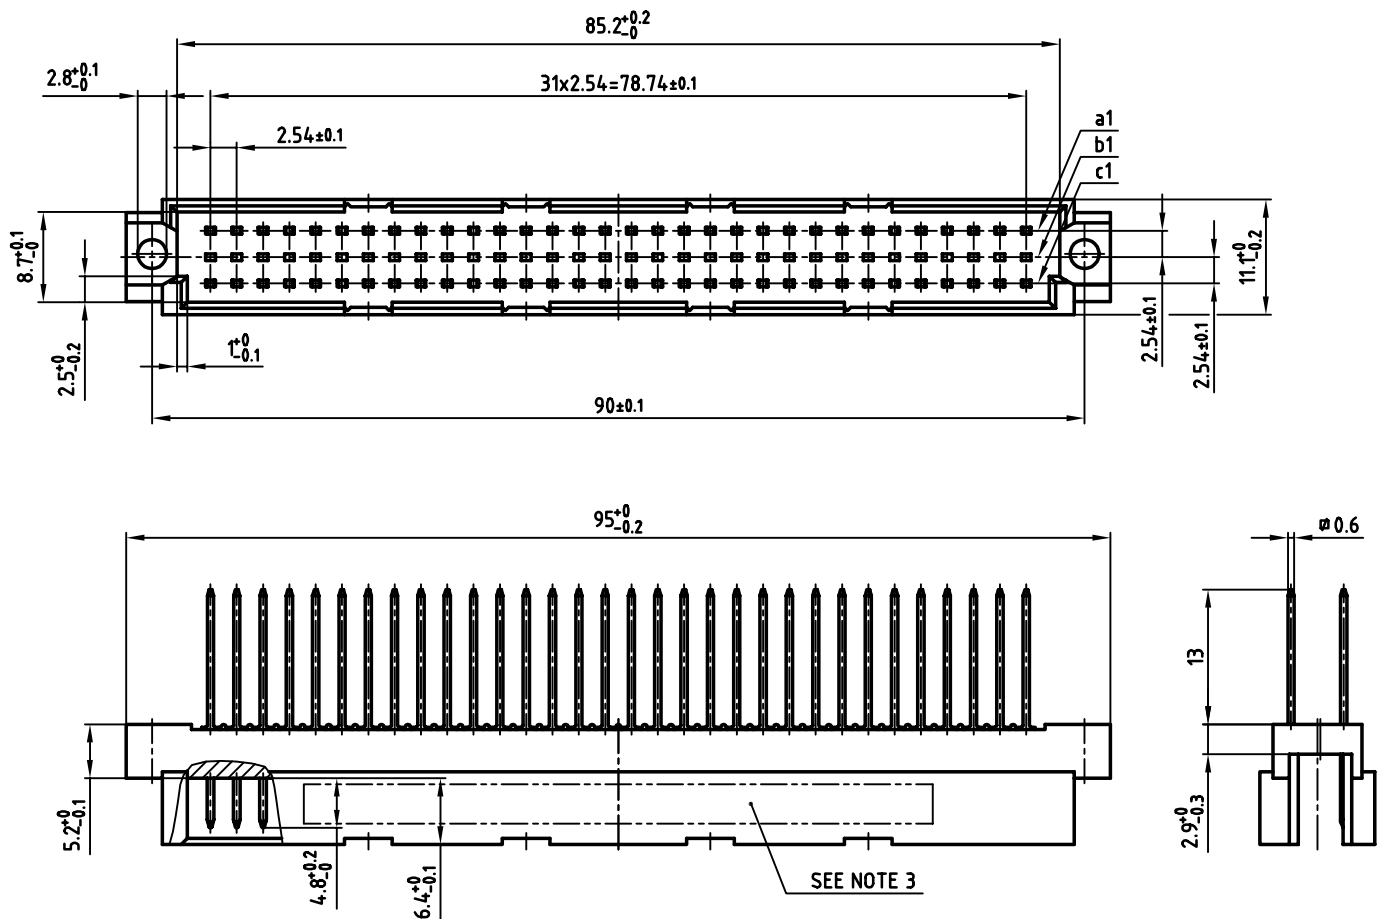

PANEL CUT OUT

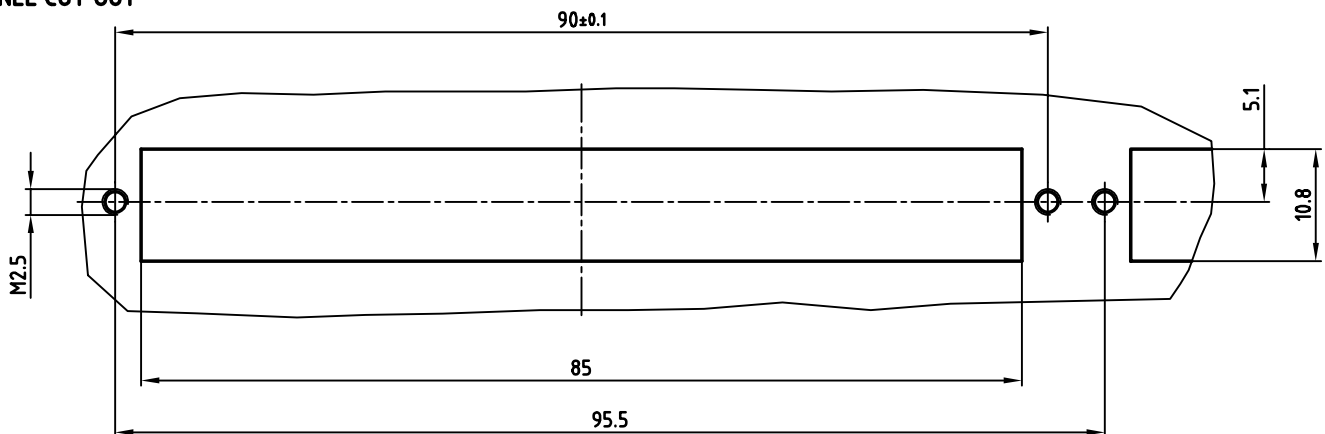

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
 PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
3. CONNECTOR IS PART MARKED: 121A10519X CONEC Y/WW

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL
CUSTOMER APPROVAL DATE:
NAME: TITLE:
COMPANY NAME:
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

				tolerance			
				2002	date	name	
				drawn	01.07.	Parei	
				appd.	01.07.	E. Mickenbecker	
				norm	DIN EN 60603		
				d-old			
							
rev.	description	date	name				

tolerance



scale:	2:1
material:	SEE NOTES

title:	MALE CONNECTOR TYPE "R"
	64pos. WIRE WRAP

dwg no:	AutoCAD 2000	DIN-A
---------	--------------	-------

12K1A210

DIN-A
3
sh:1/1

part no:	121A10519X
----------	------------