

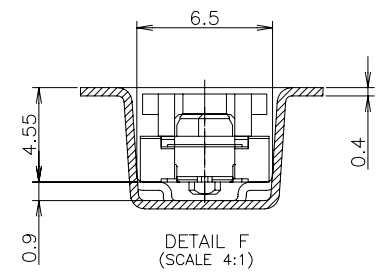
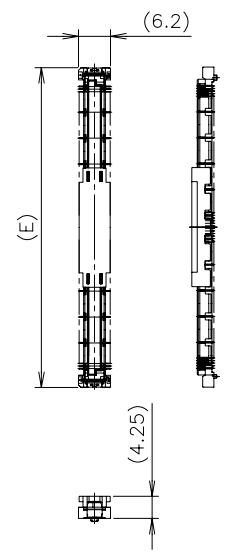



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	ECN-21-114380:ADD MATED CONDITION	31AUG2021	A.L	H.L


リール引出し方向  
DIRECTION OFF TOP OF REEL

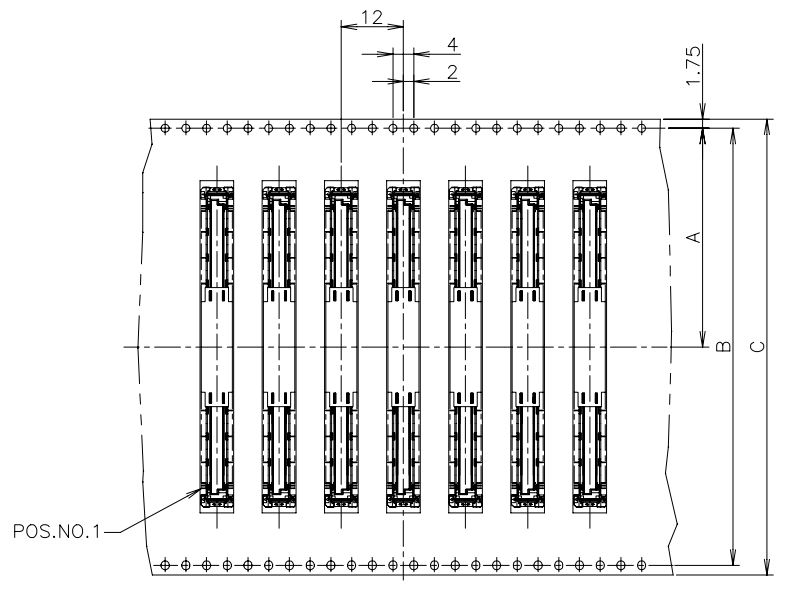

SEE DETAIL F

カバーテープ  
リッター部  
外周一巻  
WEEDING THE COVER TAPE  
AROUND THE OUTER  
PERIPHERY IN  
A TURN.

CONNECTOR DETAIL

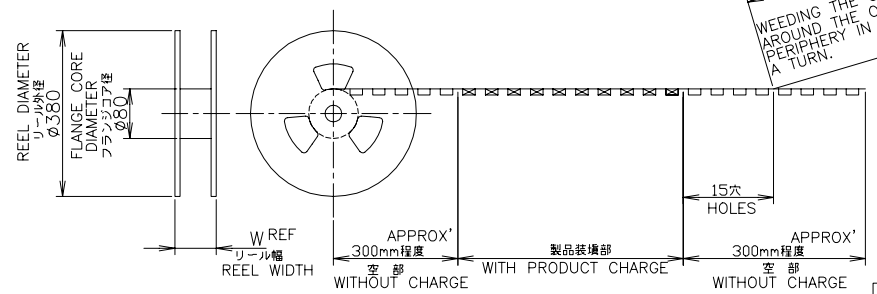

NO	950	59.5	57.7	57.1	54.5	95	61.8	62.1	88	84.4	42.25	220	BLACK	△3-2040714-7
NO	950	59.5	57.7	57.1	54.5	95	61.8	62.1	88	84.4	42.25	220	BLACK	△3-2040714-6
SEALANT	QTY	T	S	P	N	W	E	D	C	B	A	POS.	HSG COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN Y.NAKAZAWA 12MAR2008  
CHK T.FUTATSUGI 12MAR2008  
APVD T.FUTATSUGI 12MAR2008

TE Connectivity Ltd.

NAME 名称 A  
FH 0.5BTB CONNECTOR 220 POS  
REC 4H WITH G-CONT. AND CAP

PRODUCT SPEC 製品規格 108-5560  
APPLICATION SPEC 取付適用規格

SIZE A3 CAGE CODE 00779 DRAWING NO. 番号 G=2040714 RESTRICTED TO

MATERIAL 材料 FINISH 仕上 WEIGHT CUSTOMER DRAWING SCALE 尺度 1:1 SHEET 1 OF 3 REV C1

4 3 2 1

© 2008 TE Connectivity. All Rights Reserved.

REVISIONS					
變更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

POS.NO.1

0.15 ± 0.05

Φ 0.15 X

23

G H

G H

T

E

S

0.6

-(X)-

2.7

6

4.25

6.2

Ø1.4

PLUG CONNECTOR  
P/N: \*-2040713-\*

8.0

REC CONNECTOR  
P/N: \*-2040714-\*

Ⓢ FULL-MATED CONDITION

⚠ MATERIAL; HOUSING: HIGH TEMP THERMO PLASTIC UL94V-0  
CONTACT: COPPER ALLOY  
SOLDER PEG: COPPER ALLOY

⚡ FINISH ; SIGNAL CONTACT: UNDER PL Ni 0.0013mm MIN ALL OVER.  
CONTACT AREA 0.00076mm MIN Au PL.  
SOLDERING AREA 0.00005mm MIN Au PL.

GROUND CONTACT: UNDER PL Ni 0.0013mm MIN ALL OVER.  
CONTACT AREA 0.00076mm MIN Au PL.  
SOLDERING AREA 0.00005mm MIN Au PL.

SOLDER PEG: 0.001mm MIN TIN PL. OVER  
0.0013mm MIN Ni PL ALL OVER.

⚠ THIS POSITION IS GROUND CIRCUIT.

⚡ FINISH ; SIGNAL CONTACT: UNDER PL Ni 0.0013mm MIN ALL OVER.  
CONTACT AREA 0.0002mm MIN Au PL.  
SOLDERING AREA 0.00005mm MIN Au PL.

GROUND CONTACT: UNDER PL Ni 0.0013mm MIN ALL OVER.  
CONTACT AREA 0.0002mm MIN Au PL.  
SOLDERING AREA 0.00005mm MIN Au PL.

SOLDER PEG: 0.001mm MIN TIN PL. OVER  
0.0013mm MIN Ni PL ALL OVER.

G-G  
(GROUND POSITION)  
(SCALE 8:1)


H-H  
(SIGNAL POSITION)  
(SCALE 8:1)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	TE Connectivity Ltd.	NAME 名称  EMBOSS ASSY FH 0.5BTB CONNECTOR 220 POS REC 4H WITH G-CONT. AND CAP	SIZE A3	CAGE CODE 00779	DRAWING NO 番号 G=2040714	RESTRICTED TO
CHK						
APVD						
PRODUCT SPEC 製品規格						
APPLICATION SPEC 取付適用規格	WEIGHT	CUSTOMER DRAWING	SCALE 尺度 4:1	SHEET 2 OF 3	REV C1	

1470-19 (1/15)

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

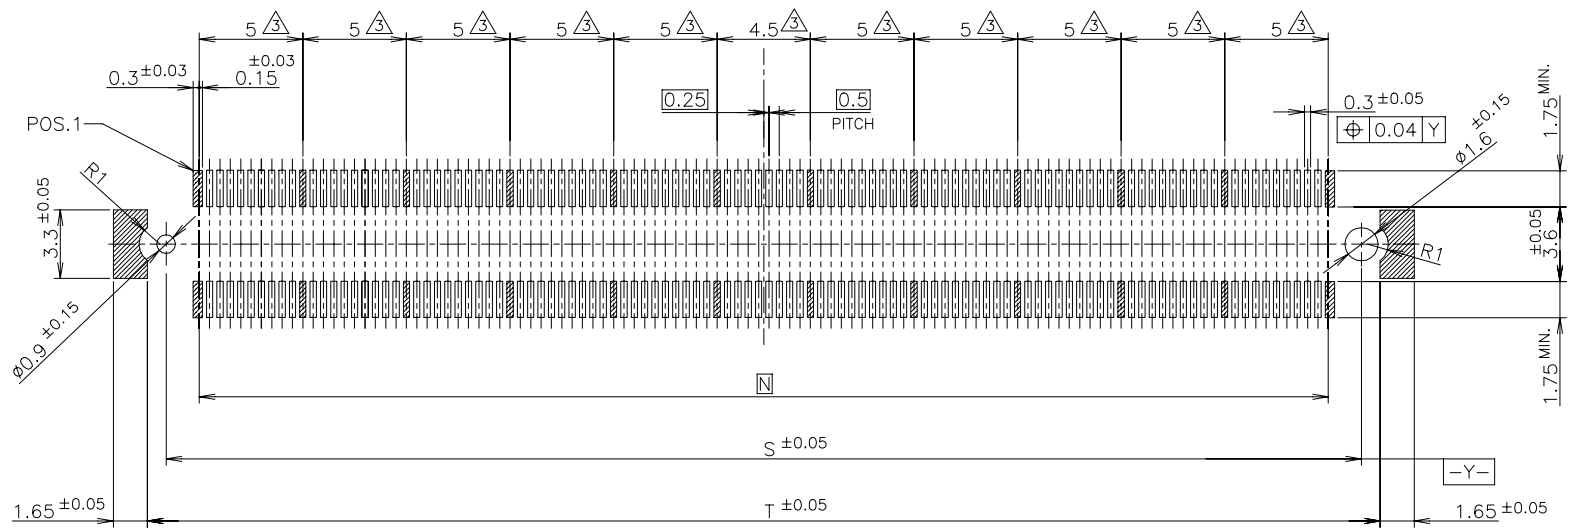

REFERENCE P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity Ltd.		
DIMENSIONS: 单位: 毫米 mm		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD	NAME 名称		
0 PLC ± 0.3 1 PLC ± 0.3 2 PLC ± 0.3 3 PLC ± 0.3 4 PLC ± 0.3 ANGLES ± 3°		PRODUCT SPEC 製品規格	EMBOSS ASSY FH 0.5BTB CONNECTOR 220 POS REC 4H WITH G-CONT. AND CAP		
MATERIAL 材料		APPLICATION SPEC 取付適用規格	SIZE A3	CAGE CODE 00779	DRAWING NO G=2040714
FINISH 仕上		WEIGHT	RESTRICTED TO		
		CUSTOMER DRAWING	SCALE 尺度 4:1	SHEET 3 OF 3	REV C1