

6

5

4

3





2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-	7553	RELEASED	02/23/07	

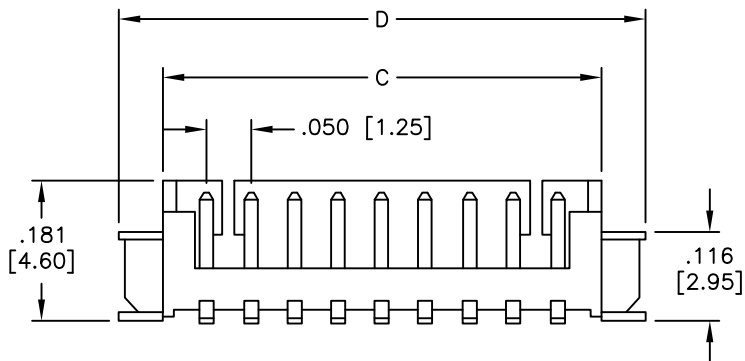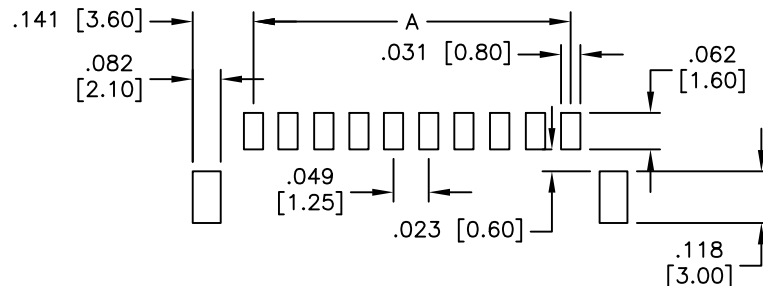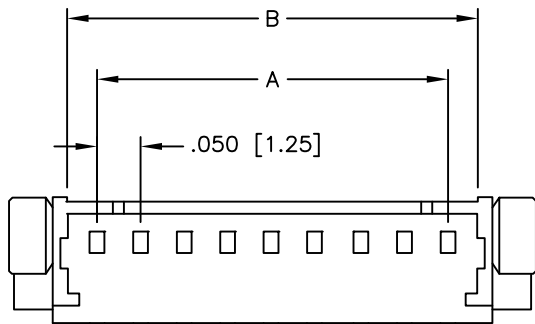

**SPECIFICATIONS:**

Material:  
 Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Natural  
 Contacts: Brass

**Plating:**  
 Tin over Nickel underplate overall

**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 100 Mohms min  
 Dielectric withstanding voltage: 250 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -40°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.



A=.049 [1.25] X No. of Spaces  
 B=.049 [1.25] X No. of Spaces + .070 [1.80]  
 C=.049 [1.25] X No. of Spaces +.118 [3.00]  
 D=.049 [1.25] X No. of Spaces + .251 [6.40]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			
APPROVALS		DATE	
DRAWN	BW	02/23/07	
CHECKED			
APPROVED			
TITLE		MX 1.25mm WAFER SMT STRAIGHT	
SIZE	PART NO.	REV.	
X	125SH-A-XX-TS-SMT	-	
REF:	SCALE: NTS	SHEET 1 OF 1	

6

5

4

3

2

1