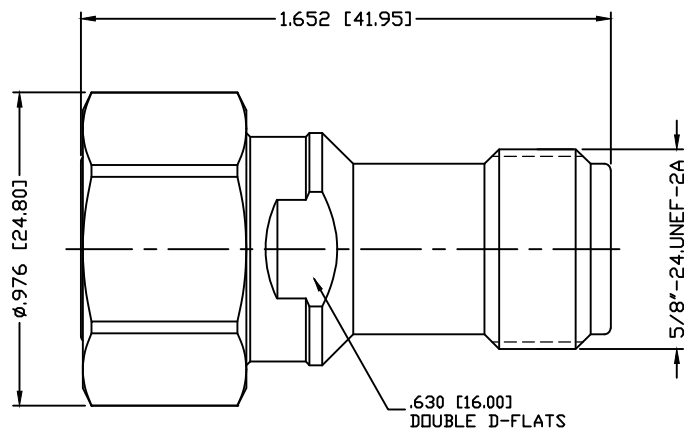


PART NO.

**RFD-43M-NF**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	06/22/15	JDMc

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

VSWR:  $\leq 1.15$ 3rd ORDER IM:  $< -160$  dBc @ 1900 MHz

DIELECTRIC WITHSTANDING VOLTAGE: 2000V/AC

INSULATION RESISTANCE: 1000M $\Omega$ OPERATING TEMPERATURE:  $-40^{\circ}$  to  $+155^{\circ}$ CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]DRAWN  
C. ZUNIGA 06/22/15  
CHECKEDORJ DRAWN  
C. ZUNIGA 06/22/15**RoHS  
COMPLIANT**PROPRIETARY AND CONFIDENTIAL  
THIS DRAWING CONTAINS  
INFORMATION PROPRIETARY TO  
RF INDUSTRIES. ANY  
UNAUTHORIZED USE OF THIS  
DRAWING IS EXPRESSLY  
PROHIBITED WITHOUT WRITTEN  
PERMISSION FROM RF  
INDUSTRIES. ANY VIOLATION IS  
PUNISHABLE UNDER U.S.  
COPYRIGHT LAWS.**RFconnectors**  
DIVISION OF RF INDUSTRIES, LTD.7610 MIRAMAR RD.  
SAN DIEGO, CA 92126  
(858) 549-6340  
(858) 549-6345 FAX**4.3/10 MALE TO N FEMALE  
ADAPTER**

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	<b>RFD-43M-NF</b>	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		

#	DESCRIPTION	QTY	MATERIAL	FINISH
7	RETAINING RING	1	BRASS	WHITE BRONZE
6	COUPLING NUT	1	BRASS	WHITE BRONZE
5	GASKET	1	S.I. RUBBER	---
4	GROUND RING	1	BeCu	WHITE BRONZE
3	INSULATOR	1	PTFE	---
2	CONTACT	1	BeCu	SILVER
1	BODY	1	BRASS	WHITE BRONZE