

Color:

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastraße 27


32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

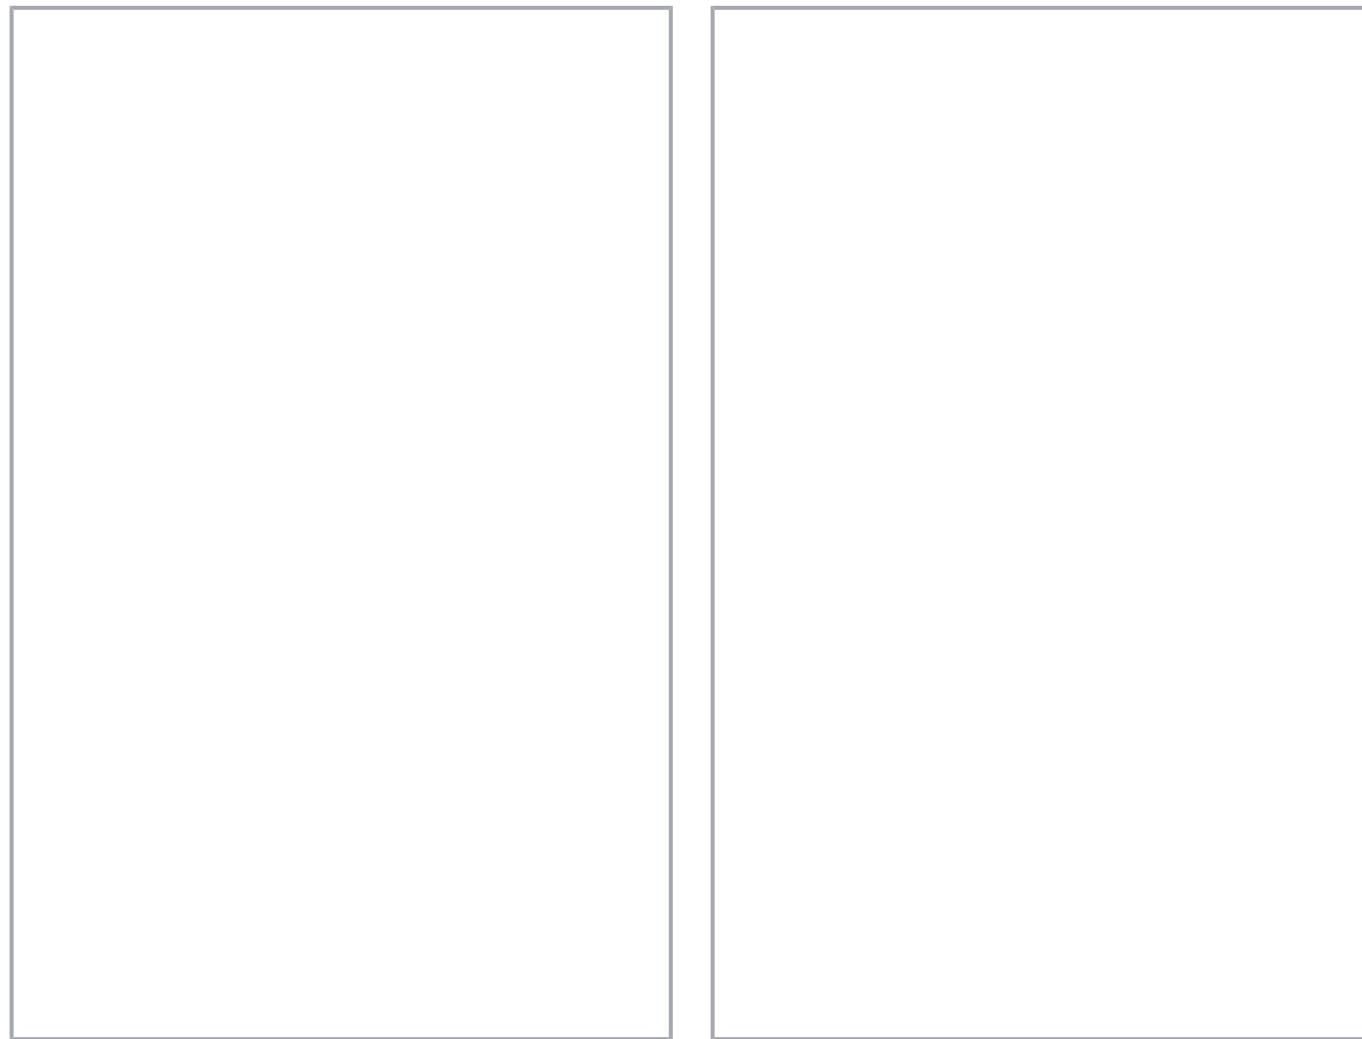

Item description

The PFC200 Controller is a compact PLC for the modular WAGO I/O System. Besides network and fieldbus interfaces, the controller supports all digital, analog and specialty modules found within the 750/753 Series.

Two ETHERNET interfaces and an integrated switch enable line topology wiring.

An integrated Webserver provides user configuration options, while displaying PFC200 status information.

Besides the processing industry and building automation, typical applications for the PFC200 include standard machinery and equipment control (e.g., packaging, bottling and manufacturing systems, as well as textile, metal and wood processing machines).

Programming per IEC 61131-3

- Programmable with CODESYS V3.5 from Firmware Release 23, WAGO-I/O-PRO V2.3 or e!COCKPIT up to Firmware Release 22
- Direct connection of WAGO's I/O modules

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

- 2 x ETHERNET (configurable), CAN, CANopen
- Linux operating system with RT-Preempt patch
- Configuration via CODESYS, *e!COCKPIT* or Web-Based Management user interface
- Maintenance-free

Data

Technical data

| | |
|---------------------------------------|---|
| Communication | CANopen Modbus TCP master/slave Modbus (UDP), WagoAppPlcModbus Library ETHERNET EtherNet/IP™ Adapter (slave) EtherNet/IP™ Scanner EtherCAT® Master OPC UA Server/Client OPC UA Pub/Sub (can be installed later) MQTT BACnet/IP, requires an additional license Telecontrol protocols, requires an additional license |
| ETHERNET protocols | DHCP DNS NTP FTP FTPS SNMP HTTP HTTPS SSH |
| Telecontrol protocols | IEC 60870 (additional license as slave or master) IEC 61850 (additional license as Client or Server) DNP3 (additional license as Slave or Master) |
| Visualization | Web-Visu Web Visu |
| Operating system | Real-time Linux (with RT-Preempt patch) |
| CPU | Cortex A8; 1 GHz |
| Programming languages per IEC 61131-3 | Instruction List (IL) Ladder Diagram (LD) Function Block Diagram (FBD) Continuous Function Chart (CFC) Structured Text (ST) Sequential Function Chart (SFC) |
| Programming environment | CODESYS V3.5, Firmware Release 23 or higher <i>e!COCKPIT</i> (based on CODESYS V3) up to Firmware Release 22 |

Subject to changes. Please also observe the further product documentation!

WAGO-I/O-PRO V2.3 (based on CODESYS V2.3), up to Firmware Release 22

| | |
|---|---|
| Configuration options | CODESYS V3 e!COCKPIT WAGO-I/O-CHECK Web-Based Management e!RUNTIME library CODESYS Library |
| Baud rate (communication/fieldbus 1) | 10/100 Mbit/s |
| Baud rate | ETHERNET: 10/100 Mbit/s |
| Transmission medium (communication/fieldbus) | ETHERNET: Twisted Pair S-UTP; 100 Ω; Cat. 5; 100 m maximum cable length |
| Main memory (RAM) | 512 MB |
| Internal memory (flash) | 4096 MB |
| Non-volatile hardware memory | 128 Kbytes |
| Program memory | CODESYS V2: 16 MB; CODESYS V3: 32 MB |
| Data memory | CODESYS V2: 64 MB; CODESYS V3: 128 MB |
| Non-volatile software memory | 128 Kbytes |
| Non-volatile software memory | 128. Kbytes |
| Type of memory card | SD and SDHC up to 32 GB (all guaranteed properties only valid with the WAGO 758-879/000-001 Memory Card) |
| Memory card slot | Push-push mechanism; Cover lid (sealable) |
| Number of modules per node (max.) | 250 |
| Number of modules without a bus extension (max.) | 64 |
| Input and output process image (internal) max. | 1000 words/1000 words |
| Input and output process image (Modbus®) max. | CODESYS V2: 1000 words/1000 words; CODESYS V3: 32000 words /32000 words |
| Input and output process image (CAN) max. | 2000 words/2000 words |
| Indicators | LED (SYS, RUN, I/O, CAN, U1 ... U6) red/green/orange: Status system, program, internal data bus, CANopen, status programmable by user (can be used via CODESYS library); LED (A, B) green: Status system power supply, field supply |
| Supply voltage (system) | 24 VDC (-25 ... +30 %); via pluggable connector (CAGE CLAMP® connection) |
| Input current (typ.) at nominal load (24 V) | 550 mA |
| Total current (system supply) | 1,700 mA |
| Supply voltage (field) | 24 VDC (-25 ... +30 %); via power jumper contacts |
| Current carrying capacity (power jumper contacts) | 10 A |
| Number of outgoing power jumper contacts | 3 |
| Isolation | 500 V system/field |

Subject to changes. Please also observe the further product documentation!

Connection data

| | |
|---|---|
| Connection technology: communication/fieldbus | CANopen: 1 x D-sub 9 plug; Modbus (TCP, UDP): 2 x RJ-45 |
| Connection technology: system supply | 2 x CAGE CLAMP® |
| Connection technology: field supply | 6 x CAGE CLAMP® |
| Connection type 1 | System/field supply |
| Solid conductor | 0.08 ... 2.5 mm² / 28 ... 14 AWG |
| Fine-stranded conductor | 0.08 ... 2.5 mm² / 28 ... 14 AWG |
| Strip length | 8 ... 9 mm / 0.31 ... 0.35 inches |
| Connection technology: device configuration | 1 x Male connector; 4-pole |

Physical data

| | |
|-----------------------------------|------------------------|
| Width | 78.6 mm / 3.094 inches |
| Height | 100 mm / 3.937 inches |
| Depth | 71.9 mm / 2.831 inches |
| Depth from upper-edge of DIN-rail | 64.7 mm / 2.547 inches |

Mechanical Data

| | |
|--------------------|------------------------------|
| Weight | 211.3 g |
| Color | light gray |
| Housing material | Polycarbonate; polyamide 6.6 |
| Conformity marking | CE |

Environmental requirements

| | |
|--|---|
| Ambient temperature (operation) | 0 ... +55 °C |
| Ambient temperature (storage) | -25 ... +85 °C |
| Protection type | IP20 |
| Pollution degree | 2 per IEC 61131-2 |
| Operating altitude | without temperature derating: 0 ... 2000 m; with temperature derating: 2000 ... 5000 m (0.5 K/100 m); 5000 m (max.) |
| Relative humidity (without condensation) | 95 % |
| Mounting position | any |
| Mounting type | DIN-35 rail |
| Vibration resistance | 4g per IEC 60068-2-6 |
| Shock resistance | 15g per IEC 60068-2-27 |
| EMC immunity to interference | per EN 61000-6-2, marine applications |
| EMC emission of interference | per EN 61000-6-3, marine applications |

Subject to changes. Please also observe the further product documentation!

| | |
|--|---------------------------------------|
| Exposure to pollutants | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Fire load | 2.551 MJ |
| Permissible H ₂ S contaminant concentration at a relative humidity 75 % | 10 ppm |
| Permissible SO ₂ contaminant concentration at a relative humidity 75 % | 25 ppm |

Commercial data

| | |
|-----------------------|---------------|
| eCl@ss 10.0 | 27-24-26-07 |
| eCl@ss 9.0 | 27-24-26-07 |
| ETIM 8.0 | EC000236 |
| ETIM 7.0 | EC000236 |
| Recupel Type | |
| PU (SPU) | 1 pcs |
| Packaging type | box |
| Country of origin | DE |
| GTIN | 4055143759687 |
| Customs tariff number | 85371091990 |

Environmental Product Compliance

| | |
|---|--|
| CAS-No. | 1303-86-2 1317-36-8 693-98-1 7439-92-1 79-94-7 |
| REACH Candidate List Substance | 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol 2-methylimidazole Diboron trioxide Lead Lead monoxide Perfluorobutane sulfonic acid (PFBS) and its salts |
| RoHS Compliance Status | Compliant,With Exemption |
| RoHS Exemption | 6(c) 7(a) 7(c)-I 7(c)-II |
| SCIP notification number (Austria) | 32def1f8-85fd-4b3d-9c39-4b58f1c09f3f |
| SCIP notification number (Belgium) | cd810f7e-2b83-4994-8c31-f55ec53b07f2 |
| SCIP notification number (Bulgaria) | 88277e88-ed58-4366-8454-4bc7ca384ab3 |
| SCIP notification number (Czech Republic) | 5fb2684c-e802-4468-b122-1a7007f03e61 |

Subject to changes. Please also observe the further product documentation!

| | |
|--|--------------------------------------|
| SCIP notification number (Denmark) | 8c97ef77-7778-4ea5-954a-7326c1877d57 |
| SCIP notification number (Finland) | 02e4ccfe-4335-4939-afb4-765d962f1161 |
| SCIP notification number (France) | b36345a4-aee5-4928-9a28-e6e1d5bfe0ad |
| SCIP notification number (Germany) | 5954cd90-40c9-4710-85d9-452a5666c276 |
| SCIP notification number (Hungary) | 05e9c781-a57e-47d9-974c-5e5114640205 |
| SCIP notification number (Italy) | b3aca67c-1fcf-461b-9fdb-ee777443710d |
| SCIP notification number (Netherlands) | d8bde5c9-6e43-427a-a972-95204102c388 |
| SCIP notification number (Poland) | 693e39b7-f81e-444f-869a-41e7b76baf97 |
| SCIP notification number (Romania) | 89c152f5-6b95-4cc7-b3d4-150a9602218c |
| SCIP notification number (Sweden) | bf1dcd42-670b-49ac-a454-0b98ffb60673 |

Approvals / Certificates

General approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|------|--|--------------------------|---|
| | EAC Brjansker Zertifizierungsstelle | TP TC 020/2011 | EAC RU C- DE.AM02. B.00087 /19 |
| | KC National Radio Research Agency | Article 58-2, Clause 3 | MSIP- REM-W43- PFC750 |
| | UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS) | - | E175199 |

Declarations of conformity and manufacturer's declarations

| Logo | Approval | Additional Approval Text | Certificate name |
|------|---|--------------------------|------------------|
| | EU-Declaration of Conformity WAGO GmbH & Co. KG | - | - |

Approvals for marine applications

| Logo | Approval | Additional Approval Text | Certificate name |
|------|--|---------------------------------|------------------|
| | ABS American Bureau of Shipping | - | 22-2219060 |
| | BSH Bundesamt fuer Seeschifffahrt und Hydrographie | - | 1104 |
| | BV Bureau Veritas S.A. | Rules for class. of Steel Ships | 66711/A0 |
| | DNV DNV GL SE | DNV-CG-0339,Aug.2021 | TAA0000194 |

Subject to changes. Please also observe the further product documentation!

| | | |
|-----------------------------------|---|-----------------------|
| KR Korean Register of Shipping | - | KR HMB05880- AC001 |
| LR Lloyds Register EMEA | - | LR22180952TA |
| PRS Polski Rejestr Statków | - | TE/2236/880590 /19 |
| RINA RINA Germany GmbH | - | ELE343521XG001 |

Approvals for hazardous areas

| Logo | Approval | Additional Approval Text | Certificate name |
|---|----------|--------------------------|---|
| ATEX TUEV Nord Cert GmbH | | EN 60079-0 | TUEV14ATEX148929X (II 3 G Ex ec IIC T4 Gc) |
| CCCEEx CQST/CNEx | | CNCA-C23-01 | 2020312310000213 (Ex ec IIC T4 Gc) |
| EAC Brjansker Zertifizierungsstelle | | TP TC 012/2011 | EAC RU C-DE.AM02.B.00163 /19 (2Ex e IIC T4 Gc X) |
| IECEx TUEV Nord Cert GmbH | | IEC 60079-0 | IECEx TUN 14.0035 X (Ex ec IIC T4 Gc) |
| INMETRO TÜV Rheinland do Brasil Ltda. | | IEC 60079-0 | BR-Ex_TÜV 12.1297 X |
| UKEx WAGO GmbH & Co. KG | | EN 60079-0 | UKCA_WAGO22UKEX003X_ec |
| UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | | UL 121201 | E198726 Sec.1 |

Optional accessories

Communication

| | | |
|---|--|--|
| Communication cable | | |
| Item no.: 750-923 Configuration cable; USB connector; Length: 2.5 m | | www.wago.com/750-923 |
| Item no.: 750-923/000-001 Configuration cable; USB connector; Length: 5 m | | www.wago.com/750-923/000-001 |

Marking accessories

| | | |
|--|--|--|
| Marker carrier | | |
| Item no.: 750-103 Group marker carrier | | www.wago.com/750-103 |
| Marker | | |

Subject to changes. Please also observe the further product documentation!

| | |
|---|---|
| Item no.: 2009-145/000-006 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue | www.wago.com/2009-145 /000-006 |
| Item no.: 2009-145 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white | www.wago.com/2009-145 |
| Item no.: 2009-145/000-002 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | www.wago.com/2009-145 /000-002 |
| Item no.: 2009-145/000-007 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray | www.wago.com/2009-145 /000-007 |
| Item no.: 2009-145/000-005 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red | www.wago.com/2009-145 /000-005 |
| Item no.: 2009-145/000-012 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | www.wago.com/2009-145 /000-012 |
| Item no.: 2009-145/000-023 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green | www.wago.com/2009-145 /000-023 |
| Item no.: 2009-145/000-024 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | www.wago.com/2009-145 /000-024 |
| Item no.: 248-501/000-006 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue | www.wago.com/248-501 /000-006 |
| Item no.: 248-501/000-007 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray | www.wago.com/248-501 /000-007 |
| Item no.: 248-501/000-002 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow | www.wago.com/248-501 /000-002 |
| Item no.: 248-501/000-012 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange | www.wago.com/248-501 /000-012 |
| Item no.: 248-501 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white | www.wago.com/248-501 |
| Item no.: 248-501/000-017 Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green | www.wago.com/248-501 /000-017 |

Subject to changes. Please also observe the further product documentation!

Item no.: 248-501/000-005
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red www.wago.com/248-501/000-005

Item no.: 248-501/000-024
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet www.wago.com/248-501/000-024

Item no.: 248-501/000-023
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green www.wago.com/248-501/000-023

Group marker carrier

Item no.: 750-107
Group marker carrier www.wago.com/750-107

Software

Basic version

Item no.: 759-333
WAGO-I/O-PRO www.wago.com/759-333

Item no.: 759-333/000-923
WAGO-I/O-PRO; USB-Set www.wago.com/759-333/000-923

Software application

Item no.: 2759-208/211-1000
Library MTP; Single License; Online activation www.wago.com/2759-208/211-1000

Item no.: 2759-245/211-1000
Library Controller Redundancy Master; Single License; Online activation www.wago.com/2759-245/211-1000

Shield termination

Shield clamping saddles

Item no.: 790-116
Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm www.wago.com/790-116

Item no.: 790-124
Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm www.wago.com/790-124

Item no.: 790-108
Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm www.wago.com/790-108

Item no.: 790-140
Shield clamping saddle; diameter of compatible conductor www.wago.com/790-140

Item no.: 790-216
Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm www.wago.com/790-216

Item no.: 790-220
Shield clamping saddle; 30 mm wide; 6 ... 20 mm www.wago.com/790-220

Subject to changes. Please also observe the further product documentation!

Item no.: 790-208

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

www.wago.com/790-208

Memory card

Memory card

Item no.: 758-879/000-001

Memory Card SD; SLC-NAND; 2 GByte; Temperature from -40 to 90 °C

www.wago.com/758-879/000-001

Item no.: 758-879/000-2108

Memory Card SD; pSLC-NAND; 8 GB; Temperature range: -40 to 90°C

www.wago.com/758-879/000-2108

System housing

System enclosure

Item no.: 850-814/002-000

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

www.wago.com/850-814/002-000

Item no.: 850-815/002-000

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate

www.wago.com/850-815/002-000

Item no.: 850-816/002-000

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate

www.wago.com/850-816/002-000

Item no.: 850-817/002-000

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

www.wago.com/850-817/002-000

Item no.: 850-825

IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20

www.wago.com/850-825

Item no.: 850-826

IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

www.wago.com/850-826

Item no.: 850-827

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

www.wago.com/850-827

Item no.: 850-827/002-000

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

www.wago.com/850-827/002-000

Item no.: 850-826/002-000

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

www.wago.com/850-826/002-000

Item no.: 850-828/002-000

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

www.wago.com/850-828/002-000

Subject to changes. Please also observe the further product documentation!

Item no.: 850-828

IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip www.wago.com/850-828

Item no.: 850-834

IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20 www.wago.com/850-834

Item no.: 850-835

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip www.wago.com/850-835

Item no.: 850-836

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip www.wago.com/850-836

Cables and pluggable connectors

Connector plug

Item no.: 750-963

Fieldbus Connector CANopen; with D-sub female connector; 9-pole www.wago.com/750-963

Item no.: 750-975

ETHERNET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly www.wago.com/750-975

Item no.: 750-978/000-012

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief www.wago.com/750-978/000-012

Item no.: 750-979/000-012

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief www.wago.com/750-979/000-012

Item no.: 750-978/000-021

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief www.wago.com/750-978/000-021

Item no.: 750-979/000-022

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief www.wago.com/750-979/000-022

Item no.: 750-978/000-022

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief www.wago.com/750-978/000-022

Item no.: 750-979/000-011

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief www.wago.com/750-979/000-011

Item no.: 750-979/000-021

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief www.wago.com/750-979/000-021

Item no.: 750-977/000-011

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22 www.wago.com/750-977/000-011

Subject to changes. Please also observe the further product documentation!

Item no.: 750-978/000-011

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief

[www.wago.com/750-978](http://www.wago.com/750-978/000-011)[/000-011](http://www.wago.com/750-978/000-011)**Item no.: 750-977/000-022**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24

[www.wago.com/750-977](http://www.wago.com/750-977/000-022)[/000-022](http://www.wago.com/750-977/000-022)**Item no.: 750-977/000-012**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22

[www.wago.com/750-977](http://www.wago.com/750-977/000-012)[/000-012](http://www.wago.com/750-977/000-012)**Item no.: 750-977/000-021**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24

[www.wago.com/750-977](http://www.wago.com/750-977/000-021)[/000-021](http://www.wago.com/750-977/000-021)**Carrier rail**

Mounting accessories

Item no.: 210-197

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

www.wago.com/210-197**Item no.: 210-198**

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

www.wago.com/210-198**Item no.: 210-504**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

www.wago.com/210-504**Item no.: 210-505**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

www.wago.com/210-505**Item no.: 210-506**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

www.wago.com/210-506**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

www.wago.com/210-508**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

www.wago.com/210-113**Item no.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

www.wago.com/210-118**Item no.: 210-112**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

www.wago.com/210-112**Item no.: 210-114**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

www.wago.com/210-114**Item no.: 210-115**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

www.wago.com/210-115

Subject to changes. Please also observe the further product documentation!

Item no.: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

www.wago.com/210-196**Downloads****Documentation****Manual**

| | | | |
|--|-------------------------------|-----------------|--------------------------|
| System Manual WAGO I/O System 750/753 Decentralized Automation Technology | V 3.3.3 2023 年8月29日 | pdf 8.7 MB | Download |
| Migration Guide Migration from e!COCKPIT projects to CODESYS V3.5 | V 1.3.0 2023 年7月3日 | pdf 5.1 MB | Download |
| Product Manual PFC200 G2 2ETH CAN Controller PFC200; 2nd Generation; 2 x ETHERNET, CAN, CANopen | 1.12.0 / FW 25 2023 年6月23日 | pdf 4.8 MB | Download |
| Product Manual OPC UA Mapping Editor | V 1.1.0 2022 年3月11日 | pdf 3.4 MB | Download |
| e!RUNTIME EtherCAT® Master | V 1.1.1 2019 年12月17日 | pdf 879.5 kB | Download |
| Cyber Security for Controller PFC100 / PFC200 | V 1.0.0 2019 年10月31日 | pdf 4.9 MB | Download |
| Product Manual WAGO MODBUS Master Configurator for configuration of MODBUS networks in WAGO-I/O-PRO (CODESYS) | V 1.1.0 | pdf 1.8 MB | Download |
| OPC_UA Mapping Editor Online Help HTML | | URL | Download |
| System Manual Series 750/753 Online HTML | | URL | Download |
| Migrationsleitfaden von e!COCKPIT-Projekten zu CODESYS V3.5 Online Hilfe (HTML) | | URL | Download |

Bid Text

| | | | |
|--------------------------|-------------|-----------------|--------------------------|
| 750-8213 docx - Datei | 2019 年1月23日 | docx 22.7 kB | Download |
|--------------------------|-------------|-----------------|--------------------------|

Instruction Leaflet

Subject to changes. Please also observe the further product documentation!

| | | | |
|--|-----------------|-----------------|--------------------------|
| CCC Ex (Additional information) WAGO-I/O-SYSTEM *750-****/* | 2023 年 4 月 26 日 | pdf 163.6 kB | Download |
|--|-----------------|-----------------|--------------------------|

Tutorial

| | | | |
|--|-----------------------------|----------------|--------------------------|
| Set IP address with Ethernet Settings In this video we are demonstrating how you can set a IP address with Ethernet Settings. Content: 00:27 – Chapter #1 Download and install software; 00:56 – Chapter #2 Open Ethernet Settings; 01:10 – Chapter #3 Establish serial Connection; 01:34 – Chapter #4 Set IP address; 02:10 – Chapter #5 Check IP address | 3.0 2017 年 12 月 18 日 | mp4 88.3 MB | Download |
| Establish connection to a controller using SSH In this video we are demonstrating how to establish a SSH connection with a controller using for example PuTTY to be able to work with the LINUX console. Contents: 0:21 Download and install the SSH client; 0:40 Establish the SSH connection; 0:50 Log on to the Controller | 1.0 2017 年 8 月 5 日 | mp4 29.0 MB | Download |

Additional Information

| | | | |
|---|---------------------------------|-----------------|--------------------------|
| Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging | V 1.1.0 2022 年 8 月 18 日 | pdf 2.2 MB | Download |
| WAGO OPC UA Server | V 1.1.0 2021 年 1 月 28 日 | pdf 1.2 MB | Download |
| e!RUNTIME EtherCAT® Master | V 1.1.1 2019 年 12 月 17 日 | pdf 879.5 kB | Download |

System Description

| | | |
|--|-----------------|--------------------------|
| Controller PFC100/200, General Product Information | pdf 564.0 kB | Download |
| Overview on WAGO-I/O-SYSTEM 750 approvals | pdf 223.5 kB | Download |

Application Notes

| | | | |
|--|-----------------------------------|-----------------|--------------------------|
| Application Note CoDeSys 2.3 | | | |
| PFC 200 G2 Codesys V3.5 Firmware PFC 200 G2 Codesys V3.5 Firmware | V 25 2023 年 7 月 14 日 | zip 22 B | Download |
| Application Note: MpBus_03 Library | 2020-08-14 2020 年 8 月 14 日 | zip 526.0 kB | Download |

Subject to changes. Please also observe the further product documentation!

This Application Note explains how a WAGO fieldbus controller sets up communication to the MP-bus actuators via the MP-bus master module (750-643).

| | | | |
|---|-------------------------------|-----------------|--------------------------|
| Application Note Library WagoDatalogger_02 This application note describes the use of the WagoDatalogger_02.lib library. Up to 80 analog or digital signals can be recorded. | 2020-05-20 2020 年 5 月 20 日 | zip 1.3 MB | Download |
| Application note Cloud Connectivity This application note explains how the WAGO controllers PFC100 and PFC200 can communicate with cloud services like Microsoft Azure (WAGO Cloud), Amazon AWS and IBM Bluemix. Data could be send to the cloud and commands could receive from the cloud. The libraries WagoLibCloud for WAGO-I/O-PRO V2.3 and WagoAppCloud for e!COCKPIT are used. | 2019-09-17 2019 年 9 月 17 日 | zip 4.1 MB | Download |
| Application note for installing a MySQL-Server on a PFC-Controller This Application Note explains how a MySQL-Server can be set up and used on a PFC 200. The Application shows how measurement values of the 3-Phase Power Measurement Module can be written into a database. | 1.0.4 2019 年 5 月 16 日 | zip 4.5 MB | Download |
| Application note: DALI 753-647 Configuration Interface This application note describes the WAGO DALI Configurator, the integration of the DALI visualization for configuring various sensor types and the implementation in a program. | 1.0.2 2019 年 4 月 29 日 | zip 3.1 MB | Download |
| Connection of Thermokon Multi-function room control units WRF 08 The fundamental way of carrying out the communication between the WAGO I/O System and the multi-function room operating panel (WRF08 RS485 Modbus) from Thermokon is described in this application note. | 10.04.2019 2019 年 4 月 10 日 | zip 876.4 kB | Download |
| Connection of Thermokon Multi-function room control units WRF 06 The fundamental method of setting up communication between the WAGO I/O System and the multi-function room operating panel (WRF06 RS485 Modbus) from Thermokon is described in this application note. | 10.04.2019 2019 年 4 月 10 日 | zip 845.9 kB | Download |
| HART Tool Routing via PROFIBUS with 750-833 and 750-333 (a116140) This application note describes how to set up asset management systems, which facilitate simple, efficient configuration of HART field devices. Using the Cerabar PMC51 (Endress+Hauser) as an example, connecting any HART sensor to a WAGO PROFIBUS controller and a WAGO PROFIBUS Coupler is explained. The cyclic PROFIBUS Master (750-8208) realizes the data exchange. As an acyclic master, a TH LINK PROFIBUS provides access for the plant asset management applications WAGOframe, PACTware and FieldCare. | 1.0.0 2019 年 3 月 22 日 | pdf 5.3 MB | Download |
| HART Tool Routing via ETHERNET with 750-820x/750-88x and CODESYS 2.3 (a116120) | 1.0.0 2019 年 3 月 22 日 | pdf 3.9 MB | Download |

Subject to changes. Please also observe the further product documentation!

This application note describes how to set up asset management systems, which facilitate simple, efficient configuration of HART field devices.

With the Cerabar PMC51 (Endress+Hauser) as an example, a connection is established from any HART sensor to a WAGO PROFIBUS Controller and a WAGO ETHERNET Fieldbus Coupler. The configuration is made with the asset management software WAGOframe, PACTware und FieldCare.

| | | | |
|---|-----------------------------|-----------------|----------|
| HVAC System Macros | 10.03.2017 | zip | Download |
| WAGO provides system macros for HVAC applications that are based on Building_HVAC_03.lib. | 2019 年3月15 日 | 13.6 MB | |
| Using the web visualization with Java™ runtime environment (JRE, JVM) 7 update 51 (7u51) (a500690) | 1.2.4 2019 年2月26 日 | zip 5.0 MB | Download |
| Oracle announced an update (7u51) for their Java™ runtime environment for the 14th of January 2014 which might have an impact on the use of the WAGO web visualization with Controller, PERSPECTO CP devices and WAGO-IO-IPCs. For more details please have a look into our application note. | | | |
| Anbindung der HKW-Elektronik Wetterprognose-Station WS-K xx T ModBus Dieser Anwendungshinweis beschreibt, wie die Kommunikation zwischen dem WAGO-I/O-System und einer HKW-Elektronik Wetterprognose-Station Kompakt realisiert werden kann. | V 1.1 2017 年7月7日 | zip 781.1 kB | Download |
| Application Note: DMX_02 This application note describes how a DMX master for DMX device control can be performed via 750-652 serial interface. | 26.04.2017 2017 年4月26 日 | zip 751.0 kB | Download |
| GRUNDFOS GENIbus interface, application note This application note describes how communication between the WAGO-I/O-SYSTEM and the Grundfos MAGNA series circulation pumps can be performed via GENIbus interface. | 20.03.2017 2017 年3月20 日 | zip 286.6 kB | Download |
| Application Note: EnOcean_06 Library This application note describes how communication between the WAGO-I/O-SYSTEM and different EnOcean wireless sensors can be implemented using the EnOcean_06.lib library. | 30.11.2016 2016 年11月30 日 | zip 842.0 kB | Download |
| Application Note Library ModuleAccess_01 These instructions describe the use of the ModuleAccess_01.lib library using 4 examples. | 05.01.2016 2016 年1月29 日 | zip 1.0 MB | Download |
| Anwendungshinweis für die Steuerung eines Igus robolink Der Anwendungshinweis beschreibt anhand einer Demoapplikation die Steuerung eines Igus robolink® Roboterarms mit sechs Achsen. Als Steuerung wird ein Wago PFC200 (Art.-Nr. 750-8202) verwendet. | 12.11.2015 2015 年11月12 日 | zip 1.3 MB | Download |

HLK-Anlagenmakros für TRIC

Subject to changes. Please also observe the further product documentation!

In dieser Zip-Datei finden Sie Vorlagen und Makros für die Planungssoftware TRIC. TRIC ist ein Werkzeug für Planer und Errichter von HLK-Anlagen, das den Richtlinien der VOB, VDI und DIN EN ISO entspricht.

2015-07-10
2015 年 7 月 10 日

zip
76.8 MB

[Download](#)

Application Note for the 750-494 3-Phase Power Measurement Module

24.01.2014

zip

[Download](#)

The application note for the 3-Phase Power Measurement Module 750-494 shows how the measured values of the power measurement module can be read. It is also shown how the power module can be configured using the WAGO-I/O-PRO- V2.3 visualization tool.

2014 年 11 月 11 日

1.7 MB

Application Note for the 750-495 3-Phase Power Measurement Module

24.01.2014

zip

[Download](#)

The application note for the 3-Phase Power Measurement Module 750-495 shows how the measured values of the power measurement module can be read. It is also shown how the power module can be configured using the WAGO-I/O-PRO- V2.3 visualization tool.

2014 年 1 月 24 日

1.8 MB

Connection of a Thermokon Thanos SR L MODBUS room control unit to the WAGO-I/O-SYSTEM

02.05.2013

zip

[Download](#)

2013 年 5 月 13 日

313.2 kB

The fundamental method of setting up communication between the WAGO I/O System and the Thanos SR L MODBUS room operating panel from Thermokon is described in this application note.

Connection of DMX devices to the WAGO-I/O-SYSTEM via the ArtNet-DMX STAGE-PROFI 1.1

11.01.2013

zip

[Download](#)

2013 年 1 月 11 日

1.5 MB

This application note describes connecting the ArtNet-DMX STAGE-PROFI 1.1 to the WAGO-I/O-SYSTEM. The ArtNet-DMX STAGE-PROFI 1.1 can be operated as a DMX master and a DMX slave.

Application Note PowerMeasurement_03 Library

19.01.2011

zip

[Download](#)

This application note describes how current, voltage, effective power, power factor and energy consumption can be measured using 3-phase power measurement modules (750-493).

2012 年 3 月 19 日

954.5 kB

Application Note Weather Station Elsner P03 Modbus

01.12.2011

zip

[Download](#)

This application note describes how communication can be set up between the WAGO I/O System and the ELSNER P03/3 weather station with a Modbus interface.

2011 年 10 月 28 日

275.6 kB

Application Note Connecting with an iPod Touch

30.03.2011

zip

[Download](#)

This Application Note explains the basic procedures for access to the WAGO Ethernet Controller 750-8xx or the WAGO Ethernet Coupler 750-3xx using an iPod Touch.

2011 年 10 月 28 日

439.1 kB

Application Note Scheduler_03.lib

20.05.2011

zip

[Download](#)

This application note describes different applications of the Scheduler_03.lib library.

2011 年 5 月 20 日

1.8 MB

Application Note e!COCKPIT

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

| | | | |
|---|-------------------------------|---------------|--------------------------|
| e!COCKPIT application note WagoAppCloud | 2022-11-04 2022 年 11 月 4 日 | zip 2.7 MB | Download |
| This application note explains how the WAGO controllers PFC100 and PFC200 can communicate with cloud services like Microsoft Azure (WAGO Cloud), Amazon AWS and IBM Bluemix. Data could be send to the cloud and commands could receive from the cloud. The library WagoAppCloud for e!COCKPIT is used. | | | |
| SNMP Communication (a500850) | 1.1.0 2020 年 2 月 20 日 | zip 3.8 MB | Download |
| This application note explains how the WAGO controllers PFC100 and PFC200 can communicate via SNMP: Sending traps / inform notifications, creating an MIB and using the controller as an SNMP agent. To do so, the SNMP-specific libraries for WAGO-I/O-PRO V2.3 and e!COCKPIT are used. | | | |
| eCOCKPIT application note installation MySQL-Server | 1.0.3 2019 年 9 月 9 日 | pdf 1.9 MB | Download |
| This Application Note explains how a MySQL-Server can be set up and used on a PFC 200. The Application shows how measurement values of the 3-Phase Power Measurement Module can be written into a database. | | | |
| HART Tool Routing via ETHERNET with 750-820x and e!RUNTIME (a116130) | 1.0.0 2019 年 3 月 22 日 | pdf 2.9 MB | Download |
| This application note describes how to set up asset management systems, which facilitate simple, efficient configuration of HART field devices. With the Cerabar PMC51 (Endress+Hauser) as an example, a connection is established from any HART sensor to a WAGO PROFIBUS Controller and a WAGO ETHERNET fieldbus coupler. The configuration is made with the asset management software WAGOframe, PACTware und FieldCare. | | | |

Libraries

| | | | |
|---|--------------------------|-----------------|--------------------------|
| Library | | | |
| WAGO_Datalogger_02.lib | 2.7 2020 年 5 月 20 日 | zip 678.8 kB | Download |
| The FbDatalogger function block logs entries from up to 80 channels at an interval of min. one second in a CSV file. | | | |
| ModuleAccess_01.lib | 1.8.7 2020 年 1 月 27 日 | zip 2.2 MB | Download |
| The ModuleAccess_01 library provides both module configuration and access to its process data within a CoDeSys project without the use of WAGO I/O Check. | | | |
| Library WagoLibCloud_02.lib | 2.2.4 2020 年 1 月 21 日 | zip 57.6 kB | Download |
| Die Bibliothek dient zur Kommunikation des WAGO Controller PFC100 und PFC200 mit Cloud Diensten wie Microsoft Azure (WAGO Cloud), Amazon AWS und IBM Bluemix. Daten können zur Cloud gesendet und Kommandos von der Cloud empfangen werden. | | | |
| WagoConfigToolLIB | 1.0.0 2013 年 10 月 8 日 | pdf 349.1 kB | Download |

Subject to changes. Please also observe the further product documentation!

The library WagoConfigToolLIB.lib library provides function blocks for accessing the device configuration (e.g., network settings, data and time, ongoing services).

| | | | |
|--|-------|-----------------|--------------------------|
| WagoLibLed | 1.0.0 | pdf 516.5 kB | Download |
| This library contains function blocks that can be used for control and querying of the user LEDs and for querying of the status LEDs. Depending on the device design, not all of the user or status LEDs may be provided. | | | |
| WagoLibDiagnosticIDs | 1.0.0 | pdf 298.2 kB | Download |
| This library is used to take part in an internal diagnostics protocol via an IEC-61131 application. You can define your own IDs and provide your own texts for this. You can also transmit your own diagnostics IDs. Diagnostics generated in this manner are saved in the system log and displayed in text form, for example, in the WBM. | | | |
| WagoLibCpuUsage | 1.0.0 | pdf 265.7 kB | Download |
| This library enables you to determine the CPU load (usage). | | | |
| WagoLibNetSnmpManager | 1.1.0 | pdf 1.1 MB | Download |
| The "WagoLibNetSnmpManager.lib" library is used to implement SNMP manager functions. This makes it possible to access other SNMP agents as well as call and modify OIDs via an IEC program. | | | |

Engineering-Software

e!COCKPIT

| | | | |
|--|----------|---------------|--------------------------|
| e!COCKPIT | 1.11.2.0 | zip 4.1 GB | Download |
| Register at no cost and test our engineering software for 30 days. | | | |

Configuration and Commissioning Software

| | | | |
|--|-----------------------------|-----------------|--------------------------|
| WAGO-IO-PRO Demo-Version (759-912) / Serie 750, 758 und 762 Für ein Firmwareupdate können Sie sich jederzeit an den Support wenden. | V 2.3.9.68 2022 年2月17日 | zip 125.5 MB | Download |
| WAGOupload is a stand-alone PC software for transferring, backing up and restoring PLC applications on WAGO 750 Series controllers. | | | |
| (759-316) WAGO Ethernet Settings / Serie 750 | 06.18.00.02 2021 年11月11日 | zip 20.0 MB | Download |
| | | | |

CODESYS V3 with WAGO DSP

| | |
|---|---------------------------------|
| CODESYS Development System V3 including WAGO Device Support Package Have you not yet installed CODESYS Development System V3? Would you like to program WAGO controllers? Then you've come to the right place! Subject to changes. Please also observe the further product documentation! | URL Download |
|---|---------------------------------|

With CODESYS Development System V3, you program according to the IEC 61131-3 standard. The software enables graphical and textual programming. Create visualizations with the integrated visualization editor.

You benefit from several WAGO libraries that support your application.

You can find it in our WAGO Download Center:

- CODESYS V3.5.x, 64-bit
- WAGO-Plugins
- WAGO libraries
- Device firmware
- Device description for WAGO controllers
- ...as well as other WAGO tools and add-ons

WAGO DSP for CODESYS V3

WAGO Device Support Package for CODESYS Development System V3

[URL](#) [Download](#)

Have you already installed CODESYS Development System V3 (min. V3.5.17.3) and only need WAGO libraries and device descriptions for the WAGO controllers? Then you've come to the right place!

Use your CODESYS Development System V3 and expand it with the device descriptions of the WAGO controllers and several WAGO libraries.

You can find it in our WAGO Download Center:

- WAGO-Plugins
- WAGO libraries
- Device firmware
- Device descriptions for WAGO controllers
- ...sowie weitere WAGO-Tools und Add-ons

Runtime Software

GitHub: Linux® Toolchain

GitHub: Linux® Software Development Kit (SDK)

[URL](#) [Download](#)

With the PFC SDK, WAGO offers Linux® enthusiasts the opportunity to compile the PFC firmware themselves, and to expand it according to their own wishes.

The WAGO PFC SDK includes a Pengutronix build environment, optimized for the PFC, and the OSELAS Toolchain, which open up the following possibilities, among others:

- Expanding the firmware functions using open source packages like: Python, SQLite3, PHP, etc.
- Compiling their own C/C++ applications with direct or indirect bus access to the local bus, CANopen, or PROFIBUS.

—
Subject to changes. Please also observe the further product documentation!

- Compiling external libraries using CODESYS V2 to expand the PLC applications.
- There are detailed instructions for many of these tasks and ideas (see WAGO GitHub HowTo's).

Firmware

| | | | |
|---|--------------|----------|--------------------------|
| Image Update (SD Karte) PFC100/200 für Codesys V2.3 u. E!cockpit | V 22 SP1 | zip | Download |
| WAGO_FW0750-8xxx_V031010_IX22_SP1_I für Codesys V2.3 u. E!cockpit | 2022 年12月12日 | 210.8 MB | |
| WUP Update (WAGOuploadTool) PFC100/200 Codesys V2.3 u. E!cockpit | V 22 SP1 | zip | Download |
| WAGO_FW0750-8xxx_V031010_IX22_SP1_W für Codesys V2.3 u. E!cockpit | 2022 年12月12日 | 208.5 MB | |

Firmware Codesys 3.5

| | | |
|--|---------------------|--------------------------|
| PFC200, Firmware Update für CoDeSys V3.5 | URL | Download |
| WAGO_FW0750-821x_V040110_FW23 | | |

Software Solutions (Applications)

Wago Application Analytics

| | | |
|----------------------------|---------------------|--------------------------|
| Wago Application Analytics | URL | Download |
|----------------------------|---------------------|--------------------------|

Analytics Connection Direct from the PLC Program

The WAGO Analytics application makes it easy to leverage optimization potential.

This new software solution for WAGO controllers allows you to analyze, evaluate and optimize processes without having to leave the familiar PLC programming environment. You can use the WAGO Analytics application without entering the IT and Linux® environment directly; numerous function modules support data acquisition, data analysis and data evaluation. The analysis, evaluation and optimization functions run in the background on powerful WAGO Edge Devices, for which an executable installation package is available. All the data stays within the local network, so no Internet connection to additional systems is necessary.

Additional data sources can be connected conveniently via Node-RED, for example. Tools like Grafana can be used for visualization, allowing you to view data quickly and easily in dashboards. Anomalies and malfunctions can be detected automatically with ready-made algorithms.

The Benefits for You:

- An easy way to get started with process data analysis
- Support throughout all analysis project phases
- Quick and easy data visualization

IoT/ Cloud

"Remote Access" Beta Software

"Remote Access" Beta Software

Subject to changes. Please also observe the further product documentation!

Register for the beta version of "Remote Access" for the WAGO Cloud.

V 0.12.0.0

2020 年 12 月 6 日

ZIP

2.1 MB

Download

CAD/CAE-Data

CAD data

2D/3D Models 750-8213

URL

Download

CAE data

ZUKEN Portal 750-8213

URL

Download

EPLAN Data Portal 750-8213

URL

Download

Device Files

Device Description File

750-914; EDS file for CANopen / 750, 752 and 767 Series

XT

zip

Download

2021 年 3 月 12 日

1.8 MB

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 750-8213

URL

Download

Controller PFC200; 2nd Generation; 2 x ETHERNET, CAN, CANopen

Installation Notes

Product family

Controller 750

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.