
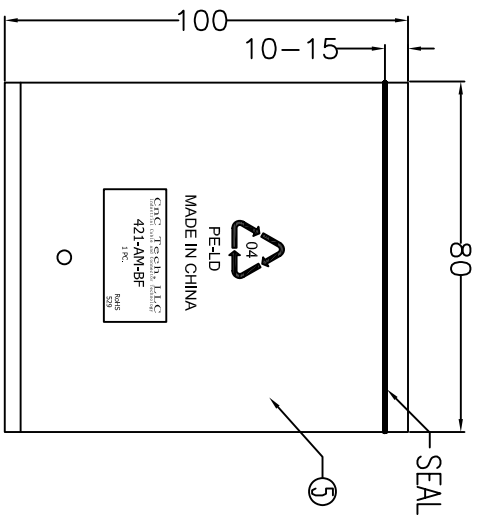
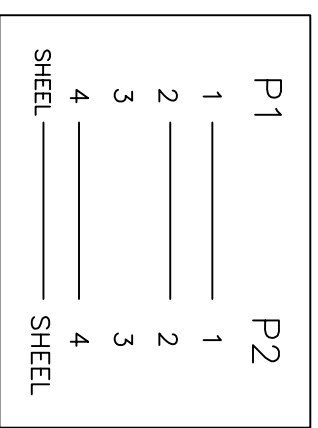

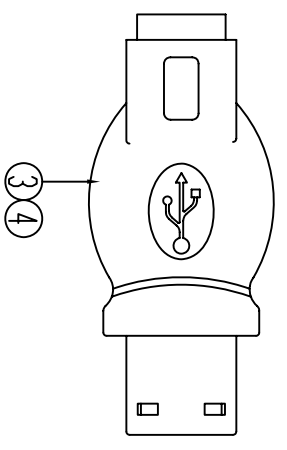


UNIT:mm

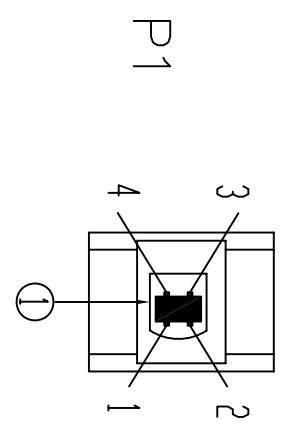

Electronic Test:
 1.100% Test,(Open,Short,Miss Wire)
 2.Contact Resistance:3 ohm max.
 3.Insulation Resistance:20M ohm min.
 4.Hi-Pot:300V DC/10ms

⑥	PE BAG	1/10	CLEAR SIZE:170*250*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE: 80*100*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"及印生产周期,有透气孔.
④	OUT JACKET	6g	BEIGE(V-29) 40P PVC(MOULD NO:WM-161)
④	IN JACKET	4g	CLEAR LDPE(X)(MOULD NO:NM-73)
③	CABLE	3	28AWG 电子线, L=30MM
②	CONN	1	USB A MALE:SHELL NICKEL PIN GOLD FLASH SHORT BODY
①	CONN	1	USB B FEMALE:SHELL NICKEL PIN GOLD FLASH SHORT BODY
NO.	NAME	Q'TY	SPECIFICATION

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	421-AM-BF
DECIDE BY		DATE	2012-02-27
VERSIONS/EDITION	A/0	PROJECTION	