

HA-5102, HA-5104 HA-5112, HA-5114

Low Noise, High Performance
Operational Amplifiers

April 1993

Features

- **Low Noise**..... $4.3nV/\sqrt{Hz}$
- **Wide Bandwidth**... **8MHz (Compensated)**
60MHz (Uncompensated)
- **High Slew Rate**..... **$3V/\mu s$ (Compensated)**
 $20V/\mu s$ (Uncompensated)
- **Low Offset Voltage**..... **0.5mV**
- **Available in Duals or Quads**

Applications

- High Q, Active Filters
- Audio Amplifiers
- Instrumentation Amplifiers
- Integrators
- Signal Generators
- For Further Design Ideas,
See Application Note 554

Description

Low noise and high performance are key words describing HA-5102/04/12/14. These general purpose amplifiers offer an array of dynamic specifications ranging from a $3V/\mu s$ slew rate and 8MHz bandwidth (5102/04) to $20V/\mu s$ slew rate and 60MHz gain-bandwidth-product (HA-5112/14). Complementing these outstanding parameters is a very low noise specification of $4.3nV/\sqrt{Hz}$ at 1kHz.


Fabricated using the Harris high frequency DI process, these operational amplifiers also offer excellent input specifications such as a 0.5mV offset voltage and 30nA offset current. Complementing these specifications are 108dB open loop gain and 60dB channel separation. Consuming a very modest amount of power (90mW/ package for duals and 150mW/package for quads), HA-5102/04/12/14 also provide 15mA of output current.

This impressive combination of features make this series of amplifiers ideally suited for designs ranging from audio amplifiers and active filters to the most demanding signal conditioning and instrumentation circuits.

These operational amplifiers are available in dual or quad form with industry standard pinouts allowing for immediate inter-changeability with most other dual and quad operational amplifiers.

HA-5102 Dual, Comp. HA-5104 Quad, Comp.
 HA-5112 Dual, Uncomp. HA-5114 Quad, Uncomp.
 Refer to the /883 data sheet for military product.

Pinouts (See Ordering Information on Next Page)

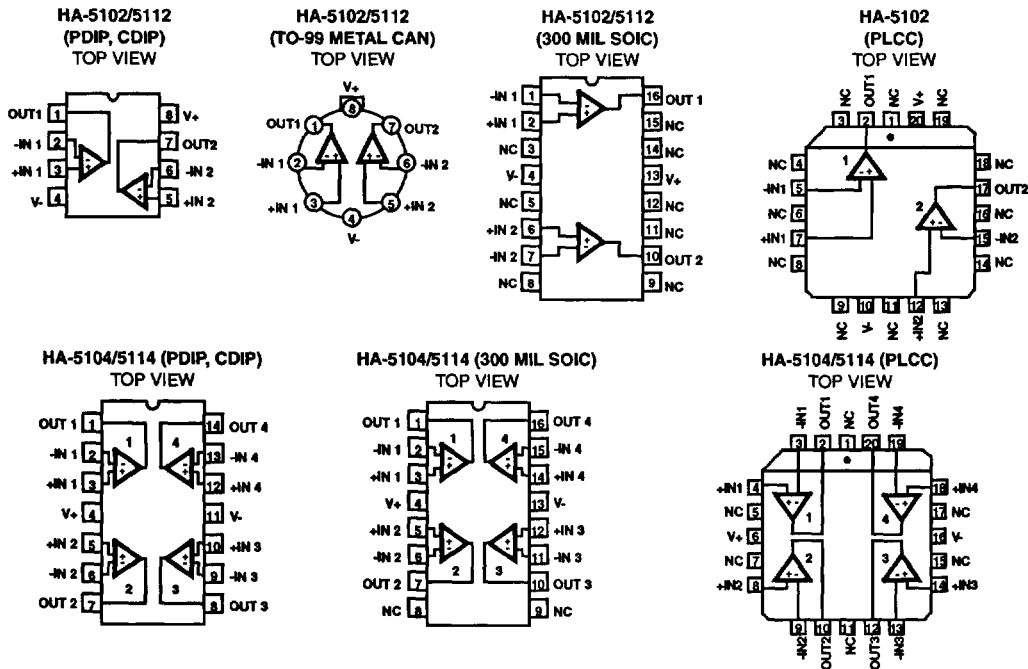


CAUTION: These devices are sensitive to electrostatic discharge. Users should follow proper I.C. Handling Procedures.
 Copyright © Harris Corporation 1993

File Number 2925.1

Ordering Information

| PART NUMBER | TEMPERATURE RANGE | PACKAGE | PART NUMBER | TEMPERATURE RANGE | PACKAGE |
|-------------|-------------------|-----------------------|-------------|-------------------|-----------------------|
| HA2-5102-2 | -55°C to +125°C | 8 Pin Can | HA2-5112-2 | -55°C to +125°C | 8 Pin Can |
| HA2-5102-5 | 0°C to +75°C | 8 Pin Can | HA2-5112-5 | 0°C to +75°C | 8 Pin Can |
| HA3-5102-5 | 0°C to +75°C | 8 Lead Plastic DIP | HA3-5112-5 | 0°C to +75°C | 8 Lead Plastic DIP |
| HA4P5102-5 | 0°C to +75°C | 20 Lead PLCC | HA7-5112-2 | -55°C to +125°C | 8 Lead Ceramic DIP |
| HA7-5102-2 | -55°C to +125°C | 8 Lead Ceramic DIP | HA7-5112-5 | 0°C to +75°C | 8 Lead Ceramic DIP |
| HA7-5102-5 | 0°C to +75°C | 8 Lead Ceramic DIP | HA9P5112-5 | 0°C to +75°C | 16 Lead Widebody SOIC |
| HA9P5102-5 | 0°C to +75°C | 16 Lead Widebody SOIC | HA9P5112-9 | -40°C to +85°C | 16 Lead Widebody SOIC |
| HA9P5102-9 | -40°C to +85°C | 16 Lead Widebody SOIC | HA1-5114-2 | -55°C to +125°C | 14 Lead Ceramic DIP |
| HA1-5104-2 | -55°C to +125°C | 14 Lead Ceramic DIP | HA1-5114-5 | 0°C to +75°C | 14 Lead Ceramic DIP |
| HA1-5104-5 | 0°C to +75°C | 14 Lead Ceramic DIP | HA3-5114-5 | 0°C to +75°C | 14 Lead Plastic DIP |
| HA3-5104-5 | 0°C to +75°C | 14 Lead Plastic DIP | HA4P5114-5 | 0°C to +75°C | 20 Lead PLCC |
| HA4P5104-5 | 0°C to +75°C | 20 Lead PLCC | HA9P5114-5 | 0°C to +75°C | 16 Lead Widebody SOIC |
| HA9P5104-5 | 0°C to +75°C | 16 Lead Widebody SOIC | HA9P5114-9 | -40°C to +85°C | 16 Lead Widebody SOIC |
| HA9P5104-9 | -40°C to +85°C | 16 Lead Widebody SOIC | | | |

Simplified Schematic

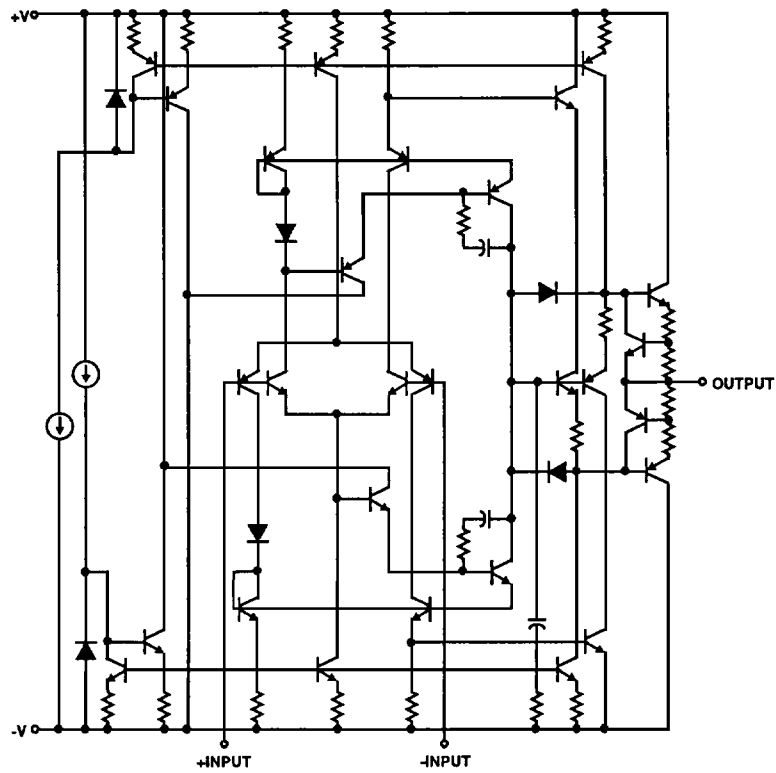

2
OPERATIONAL AMPLIFIERS

Specifications HA-5102, HA-5104, HA-5112, HA-5114

Absolute Maximum Ratings (Note 1)

| | |
|-----------------------------------------------------|----------------------|
| $T_A = +25^\circ\text{C}$, Unless Otherwise Stated | |
| Supply Voltage Between V+ and V- Terminals | 40.0V |
| Differential Input Voltage | 7V |
| Input Voltage (Note 2) | $\pm 15\text{V}$ |
| Output Short Circuit Duration (Note 3) | Indefinite |
| Junction Temperature (Note 4) | $+175^\circ\text{C}$ |
| Junction Temperature (Plastic Package) | $+150^\circ\text{C}$ |
| Lead Temperature (Soldering 10 Sec.) | $+300^\circ\text{C}$ |

Operating Conditions

| | |
|------------------------------|------------------------------------------------------|
| Operating Temperature Ranges | |
| HA-5102/5104/5112/5114-2 | $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ |
| HA-5102/5104/5112/5114-5 | $0^\circ\text{C} \leq T_A \leq +75^\circ\text{C}$ |
| HA-5102/5104/5112/5114-9 | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ |
| Storage Temperature Range | $-65^\circ\text{C} \leq T_A \leq +150^\circ\text{C}$ |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

Electrical Specifications $V_+ = 15\text{V D.C.}, V_- = -15\text{V D.C.},$ Unless Otherwise Specified

| PARAMETER | TEMP | HA-5102-2, -5 HA-5112-2, -5 | | | HA-5104-2, -5 HA-5114-2, -5 | | | HA-5102-9 HA-5112-9 | | | HA-5104-9 HA-5114-9 | | | UNITS |
|------------------------------------------------------|---------------------|--------------------------------|----------|-----|--------------------------------|----------|-----|------------------------|----------|-----|------------------------|----------|------------------------------|------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| INPUT CHARACTERISTICS | | | | | | | | | | | | | | |
| Offset Voltage | $+25^\circ\text{C}$ | - | 0.5 | 2.0 | - | 0.5 | 2.5 | - | 0.5 | 2.0 | - | 0.5 | 2.5 | mV |
| | Full | - | - | 2.5 | - | - | 3.0 | - | - | 2.5 | - | - | 3.0 | mV |
| Offset Voltage Average Drift | Full | - | 3 | - | - | 3 | - | - | 3 | - | - | 3 | $\mu\text{V}/^\circ\text{C}$ | |
| Bias Current | $+25^\circ\text{C}$ | - | 130 | 200 | - | 130 | 200 | - | 130 | 200 | - | 130 | 200 | nA |
| | Full | - | - | 325 | - | - | 325 | - | - | 500 | - | - | 500 | nA |
| Offset Current | $+25^\circ\text{C}$ | - | 30 | 75 | - | 30 | 75 | - | 30 | 75 | - | 30 | 75 | nA |
| | Full | - | - | 125 | - | - | 125 | - | - | 125 | - | - | 125 | nA |
| Input Resistance | $+25^\circ\text{C}$ | - | 500 | - | - | 500 | - | - | 500 | - | - | 500 | - | k Ω |
| Common Mode Range | Full | ± 12 | - | - | ± 12 | - | - | ± 12 | - | - | ± 12 | - | - | V |
| TRANSFER CHARACTERISTICS | | | | | | | | | | | | | | |
| Large Signal Voltage Gain (Note 5) | $+25^\circ\text{C}$ | 100 | 250 | - | 100 | 250 | - | 80 | 250 | - | 80 | 250 | - | kV/V |
| | Full | 100 | - | - | 100 | - | - | 80 | - | - | 80 | - | - | kV/V |
| Common Mode Rejection Ratio (Note 6) | Full | 86 | 95 | - | 86 | 95 | - | 80 | 95 | - | 80 | 95 | - | dB |
| Small Signal Bandwidth | | | | | | | | | | | | | | |
| HA-5102/5104 ($A_V = 1$) | $+25^\circ\text{C}$ | - | 8 | - | - | 8 | - | - | 8 | - | - | 8 | - | MHz |
| Gain Bandwidth Product | | | | | | | | | | | | | | |
| HA-5112/5114 ($A_V = 10$) | $+25^\circ\text{C}$ | - | 60 | - | - | 60 | - | - | 60 | - | - | 60 | - | MHz |
| Channel Separation (Note 7) | $+25^\circ\text{C}$ | - | 60 | - | - | 60 | - | - | 60 | - | - | 60 | - | dB |
| OUTPUT CHARACTERISTICS | | | | | | | | | | | | | | |
| Output Voltage Swing ($R_L = 10\text{k}\Omega$) | Full | ± 12 | ± 13 | - | ± 12 | ± 13 | - | ± 12 | ± 13 | - | ± 12 | ± 13 | - | V |
| | Full | ± 10 | ± 12 | - | ± 10 | ± 12 | - | ± 10 | ± 12 | - | ± 10 | ± 12 | - | V |
| Output Current (Note 8) | Full | ± 10 | ± 15 | - | ± 10 | ± 15 | - | ± 7 | ± 15 | - | ± 7 | ± 15 | - | mA |
| Full Power Bandwidth (Note 9) | | | | | | | | | | | | | | |
| HA-5102/5104 | $+25^\circ\text{C}$ | 16 | 47 | - | 16 | 47 | - | 16 | 47 | - | 16 | 47 | - | kHz |
| HA-5112/5114 | $+25^\circ\text{C}$ | 191 | 318 | - | 191 | 318 | - | 191 | 318 | - | 191 | 318 | - | kHz |
| Output Resistance | $+25^\circ\text{C}$ | - | 110 | - | - | 110 | - | - | 110 | - | - | 110 | - | Ω |
| STABILITY | | | | | | | | | | | | | | |
| Minimum Stable Closed Loop Gain | | | | | | | | | | | | | | |
| HA-5102/5104 | Full | 1 | - | - | 1 | - | - | 1 | - | - | 1 | - | - | V/V |
| HA-5112/5114 | Full | 10 | - | - | 10 | - | - | 10 | - | - | 10 | - | - | V/V |

Specifications HA-5102, HA-5104, HA-5112, HA-5114

Electrical Specifications $V_+ = 15V$ D.C., $V_- = -15V$ D.C., Unless Otherwise Specified (Continued)

| PARAMETER | TEMP | HA-5102-2, -5 HA-5112-2, -5 | | | HA-5104-2, -5 HA-5114-2, -5 | | | HA-5102-9 HA-5112-9 | | | HA-5104-9 HA-5114-9 | | | UNITS |
|----------------------------------------|-------|--------------------------------|------|-----|--------------------------------|------|-----|------------------------|------|-----|------------------------|------|-----|-------------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| TRANSIENT RESPONSE (Note 10) | | | | | | | | | | | | | | |
| Rise Time | | | | | | | | | | | | | | |
| HA-5102/5104 | +25°C | - | 108 | 200 | - | 108 | 200 | - | 108 | 200 | - | 108 | 200 | ns |
| HA-5112/5114 | +25°C | - | 48 | 100 | - | 48 | 100 | - | 48 | 100 | - | 48 | 100 | ns |
| Overshoot | | | | | | | | | | | | | | |
| HA-5102/5104 | +25°C | - | 20 | 35 | - | 20 | 35 | - | 20 | 35 | - | 20 | 35 | % |
| HA-5112/5114 | +25°C | - | 30 | 40 | - | 30 | 40 | - | 30 | 40 | - | 30 | 40 | % |
| Slew Rate | | | | | | | | | | | | | | |
| HA-5102/5104 | +25°C | 1 | 3 | - | 1 | 3 | - | 1 | 3 | - | 1 | 3 | - | V/μs |
| HA-5112/5114 | +25°C | 12 | 20 | - | 12 | 20 | - | 12 | 20 | - | 12 | 20 | - | V/μs |
| Settling Time (Note 11) | | | | | | | | | | | | | | |
| HA-5102/5104 | +25°C | - | 4.5 | - | - | 4.5 | - | - | 4.5 | - | - | 4.5 | - | μs |
| HA-5112/5114 | +25°C | - | 0.6 | - | - | 0.6 | - | - | 0.6 | - | - | 0.6 | - | μs |
| NOISE CHARACTERISTICS (Note 12) | | | | | | | | | | | | | | |
| Input Noise Voltage | | | | | | | | | | | | | | |
| f = 10Hz | +25°C | - | 9 | 25 | - | 9 | 25 | - | 9 | 25 | - | 9 | 25 | nV/√Hz |
| f = 1kHz | +25°C | - | 4.3 | 6.0 | - | 4.3 | 6.0 | - | 4.3 | 6.0 | - | 4.3 | 6.0 | nV/√Hz |
| Input Noise Current | | | | | | | | | | | | | | |
| f = 10Hz | +25°C | - | 5.1 | 15 | - | 5.1 | 15 | - | 5.1 | 15 | - | 5.1 | 15 | pA/√Hz |
| f = 1kHz | +25°C | - | 0.57 | 3 | - | 0.57 | 3 | - | 0.57 | 3 | - | 0.57 | 3 | pA/√Hz |
| Broadband Noise Voltage | | | | | | | | | | | | | | |
| f = DC to 30kHz | +25°C | - | 870 | - | - | 870 | - | - | 870 | - | - | 870 | - | nV _{RMS} |
| POWER SUPPLY CHARACTERISTICS | | | | | | | | | | | | | | |
| Supply Current | +25°C | - | 3.0 | 5.0 | - | 5.0 | 6.5 | - | 3.0 | 5.0 | - | 5.0 | 6.5 | mA |
| Power Supply Rejection Ratio (Note 6) | Full | 86 | 100 | - | 86 | 100 | - | 80 | 100 | - | 80 | 100 | - | dB |

NOTES:

- Absolute maximum ratings are limiting values, applied individually, beyond which the serviceability of the circuit may be impaired. Functional operability under any of these conditions is not necessarily implied.
- For supply voltages $< \pm 15V$, the absolute maximum input voltage is equal to the supply voltage.
- Any one amplifier may be shorted to ground indefinitely.
- See thermal constants in "Die Characteristics" section. Maximum power dissipation, including output load, must be designed to maintain the maximum junction temperature below $+175^\circ C$ for hermetic packages, and below $+150^\circ C$ for plastic packages.
- $V_{OUT} = \pm 10V$, $R_L = 2k\Omega$.
- $V_{CM} = \pm 5.0V$.
- Channel separation value is referred to the input of the amplifier. Input test conditions are: $f = 10kHz$; $V_{IN} = 100mV$ peak; $R_S = 1k\Omega$. (Refer to Channel Separation vs. Frequency Curve for test circuits.).
- Output current is measured with $V_{OUT} = \pm 5V$.
- Full power bandwidth is guaranteed by equation: Full power bandwidth = $\frac{\text{Slew Rate}}{2\pi V_{PEAK}}$.
- Refer to Test Circuits section of the data sheet.
- Settling time is measured to 0.1% of final value for a 1 volt input step, and $A_V = -10$ for HA-5112/5114, and a 10V input step, $A_V = -1$ for HA-5102/5104.
- The limits for these parameters are guaranteed based on lab characterization, and reflect lot-to-lot variation.

2

**OPERATIONAL
AMPLIFIERS**

Die Characteristics

| | | | | |
|----------------------|------------------------------------------------------|--------------------------|---------------|---------------|
| Transistor Count | | Thermal Constants (°C/W) | θ_{JA} | θ_{JC} |
| HA-5102/5112 | 93 | HA2-5102/5112 (CAN) | 108 | 33 |
| HA-5104/5114 | 175 | HA3-5102/5112 (PDIP) | 92 | 30 |
| Die Dimensions | | HA4P5102 (PLCC) | 74 | 33 |
| HA-5102/5112 | 98.4 x 67.3 x 19 mils (2500 x 1710 x 480 μ m) | HA7-5102/5112 (CDIP) | 114 | 34 |
| HA-5104/5114 | 99.6 x 95.3 x 19 mils (2530 x 2420 x 480 μ m) | HA9P5102/5112 (SOIC) | 112 | 35 |
| Substrate Potential* | V- | HA1-5104/5114 (CDIP) | 71 | 13 |
| Process | Bipolar-DI | HA3-5104/5114 (PDIP) | 86 | 25 |
| Passivation | Nitride | HA4P5104/5114 (PLCC) | 74 | 32 |
| | | HA9P5104/5114 (SOIC) | 96 | 26 |

* The substrate may be left floating (Insulating Die Mount) or it may be mounted on a conductor at V- potential.

Test Circuits

HA-5102, HA5104

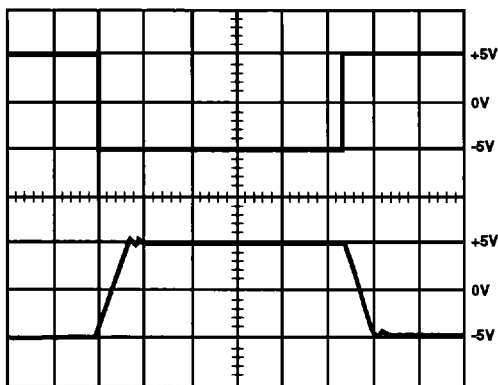
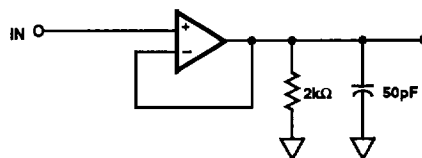
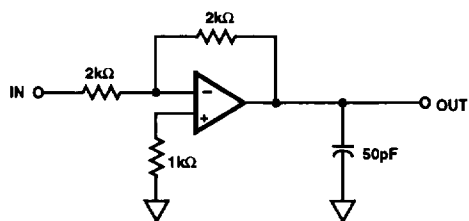


FIGURE 1. LARGE SIGNAL RESPONSE CIRCUIT
Volts: 5V/Div., Time: 5 μ s/Div. ($A_V = -1$)


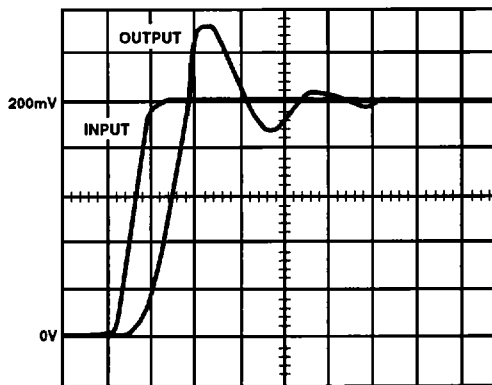


FIGURE 2. SMALL SIGNAL RESPONSE CIRCUIT
Volts: 40mV/Div., Time: 50ns/Div. ($A_V = +1$)

Test Circuits (Continued)

HA-5112, HA5114

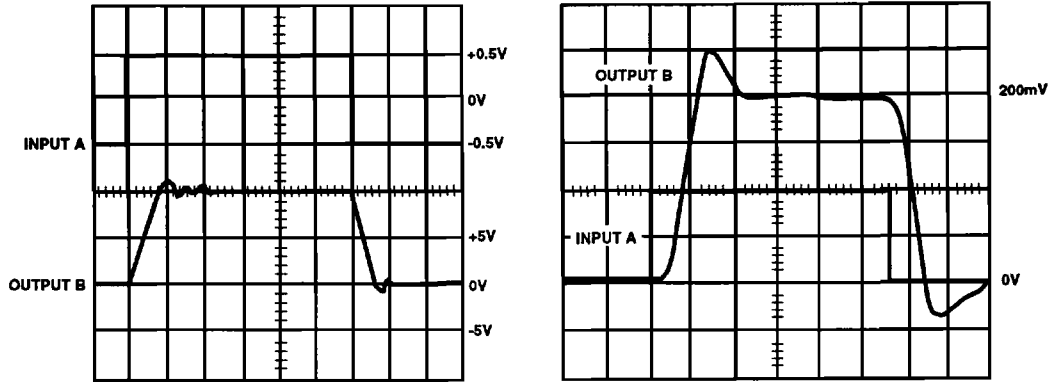

Volts: Input A: 0.5V/Div., Output B: 5V/Div. Time: 50ns/Div.

Volts: Input A: 0.01V/Div., Output B: 50mV/Div. Time: 50ns/Div.


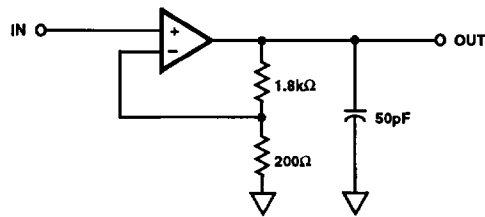


FIGURE 3. LARGE AND SMALL SIGNAL RESPONSE CIRCUIT
($A_V = +10$)

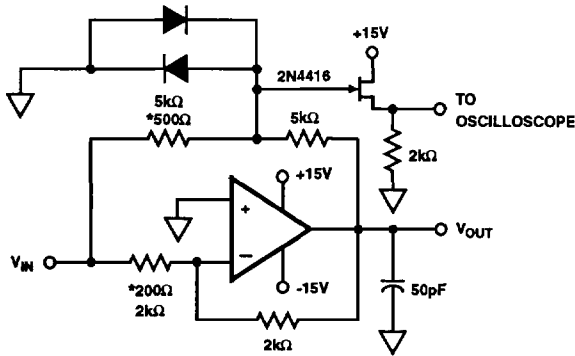

- $A_V = -1$ (HA-5102/5104), $*A_V = -10$ (HA-5112/5114)
- Feedback and summing resistors should be 0.1% matched.
- Clipping diodes are optional, HP5082-2810 recommended.

FIGURE 4. SETTLING TIME CIRCUIT

Typical Performance Curves

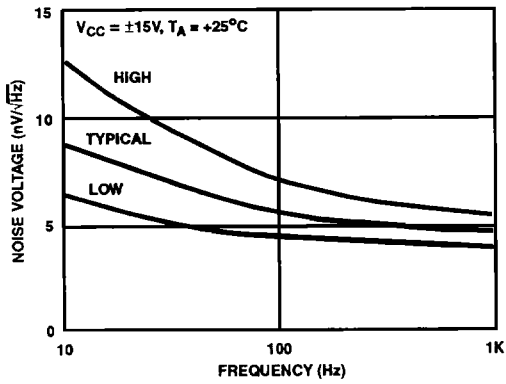


FIGURE 5. INPUT NOISE VOLTAGE DENSITY

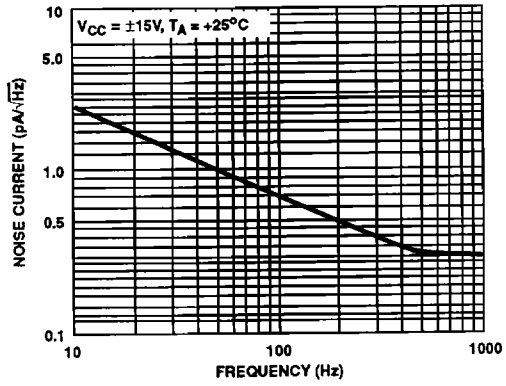


FIGURE 6. INPUT NOISE CURRENT DENSITY

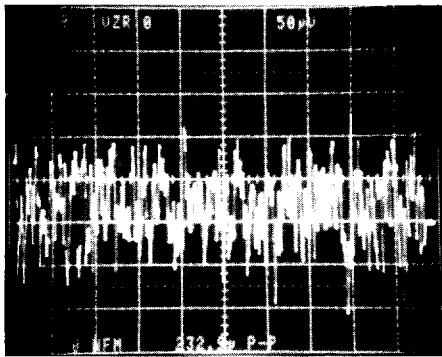


FIGURE 7. 0.1Hz TO 10Hz NOISE
 $V_{CC} = \pm 15V$, $T_A = +25^\circ C$, $50\mu V/Div.$, $1s/Div.$, $A_V = 1000V/V$
 Input Noise = $0.232\mu V_{p,p}$

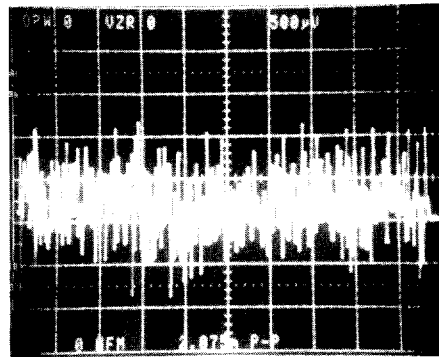


FIGURE 8. 0.1Hz TO 1MHz NOISE
 $V_{CC} = \pm 15V$, $T_A = +25^\circ C$, $500\mu V/Div.$, $1s/Div.$, $A_V = 1000V/V$
 Total Output Noise = $2.075\mu V_{p,p}$

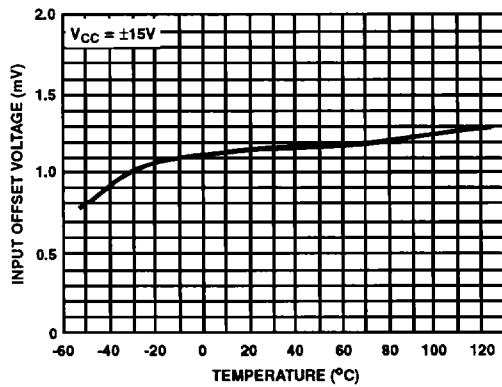


FIGURE 9. V_{IO} vs TEMPERATURE

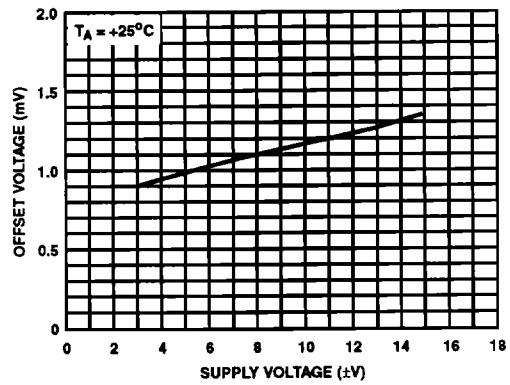


FIGURE 10. V_{IO} vs V_{CC}

Typical Performance Curves (Continued)

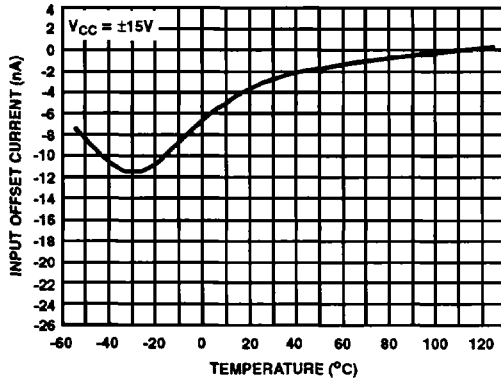


FIGURE 11. I_{IO} vs TEMPERATURE

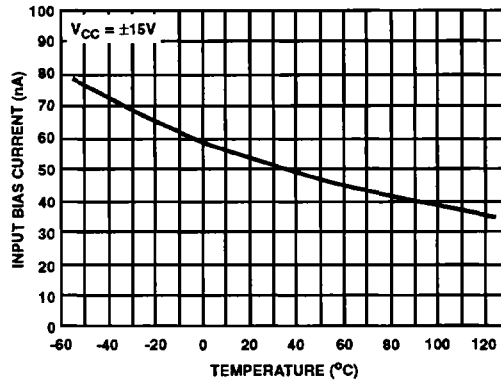


FIGURE 12. I_{BIAS} vs TEMPERATURE

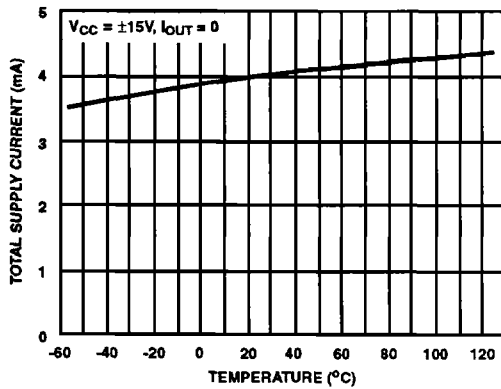


FIGURE 13. I_{CC} vs TEMPERATURE (HA-5104/14)

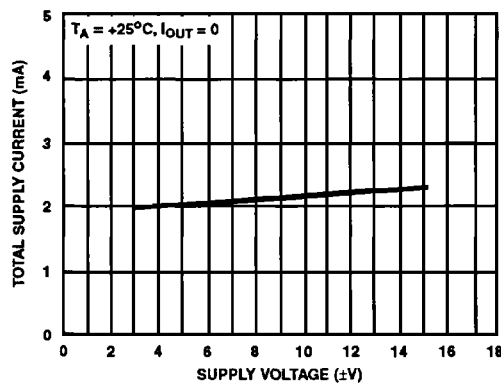


FIGURE 14. I_{CC} vs V_{CC} (HA-5102/12)

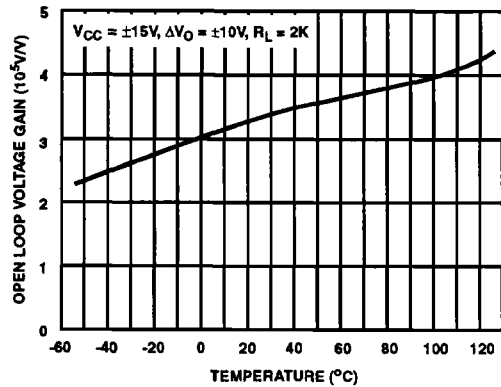


FIGURE 15. A_{VOL} vs TEMPERATURE

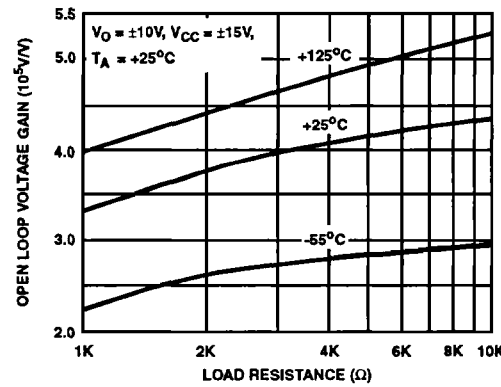


FIGURE 16. A_{VOL} vs LOAD RESISTANCE

Typical Performance Curves (Continued)

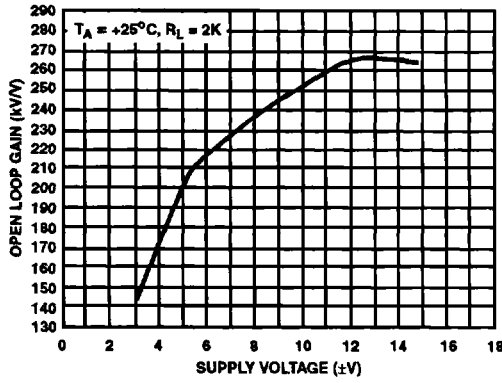


FIGURE 17. A_{VOL} vs V_{CC}

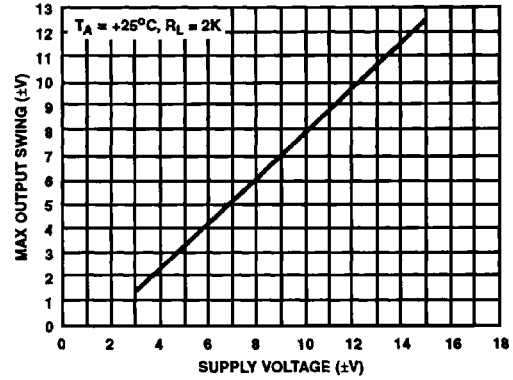


FIGURE 18. V_{OUT} vs V_{CC}

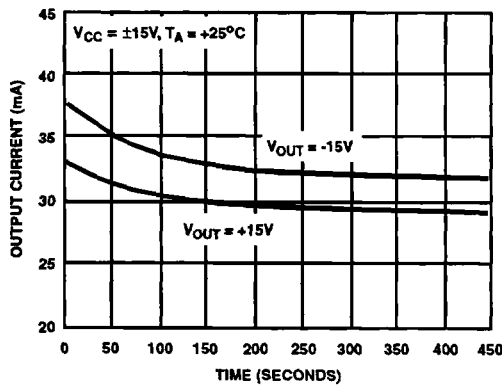


FIGURE 19. OUTPUT SHORT CIRCUIT CURRENT vs TIME

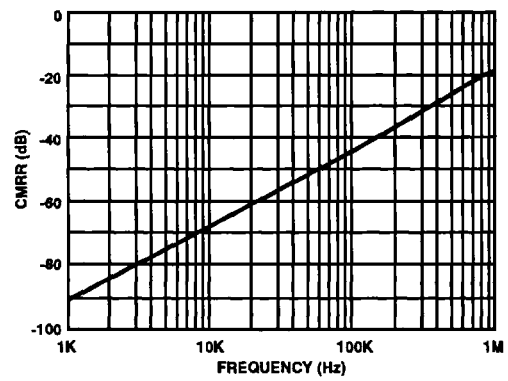


FIGURE 20. CMRR vs FREQUENCY

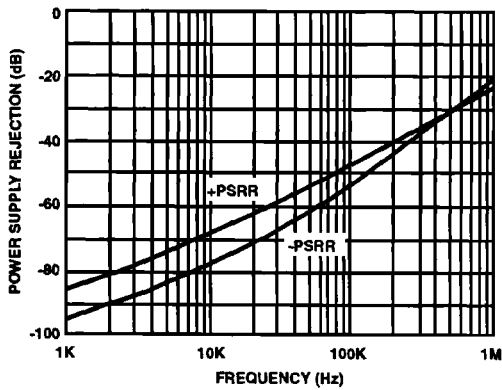


FIGURE 21. PSRR vs FREQUENCY

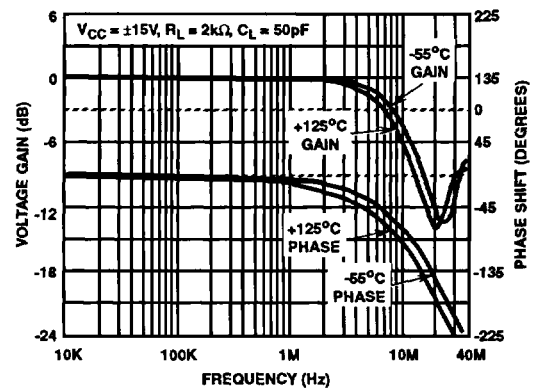


FIGURE 22. HA-5104/02 UNITY GAIN FREQUENCY RESPONSE

Typical Performance Curves (Continued)

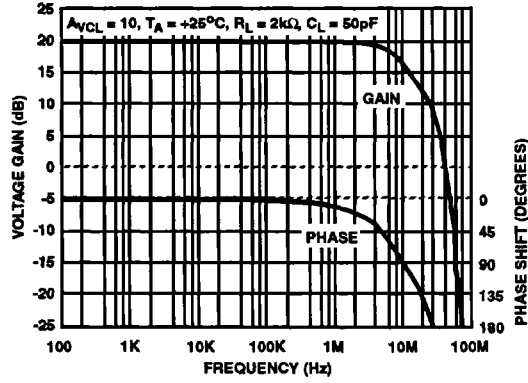


FIGURE 23. HA-5112/14 FREQUENCY RESPONSE

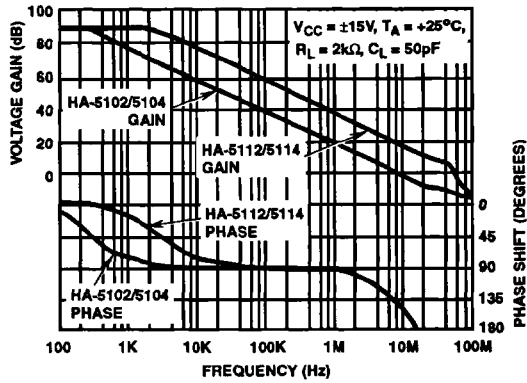


FIGURE 24. OPEN LOOP GAIN vs FREQUENCY

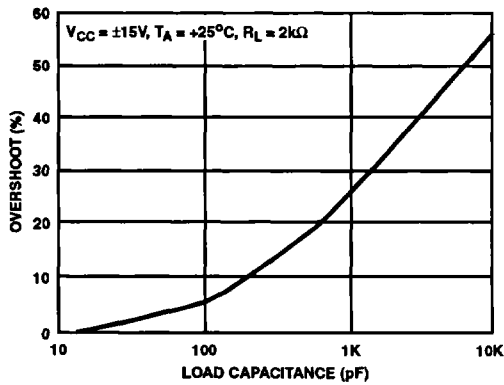


FIGURE 25. SMALL SIGNAL OVERSHOOT vs C_{LOAD}

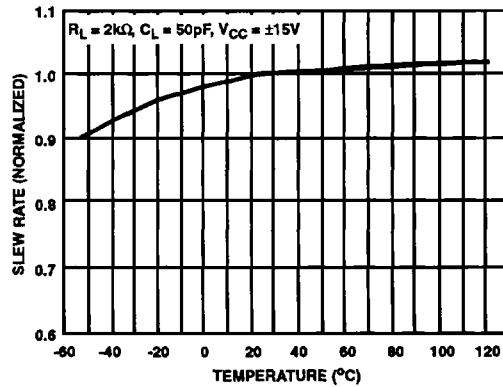


FIGURE 26. SLEW RATE vs TEMPERATURE

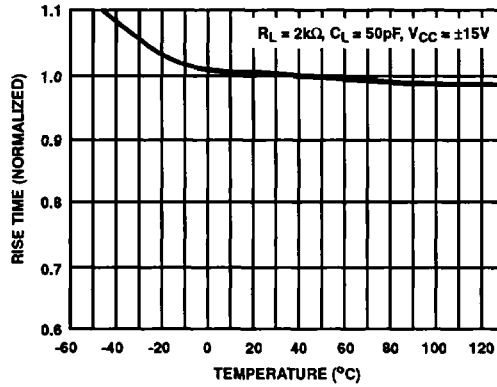


FIGURE 27. RISE TIME vs TEMPERATURE