



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00				
	G	REVISED PER ECO-14-011808	09AUG2014	AP	SB

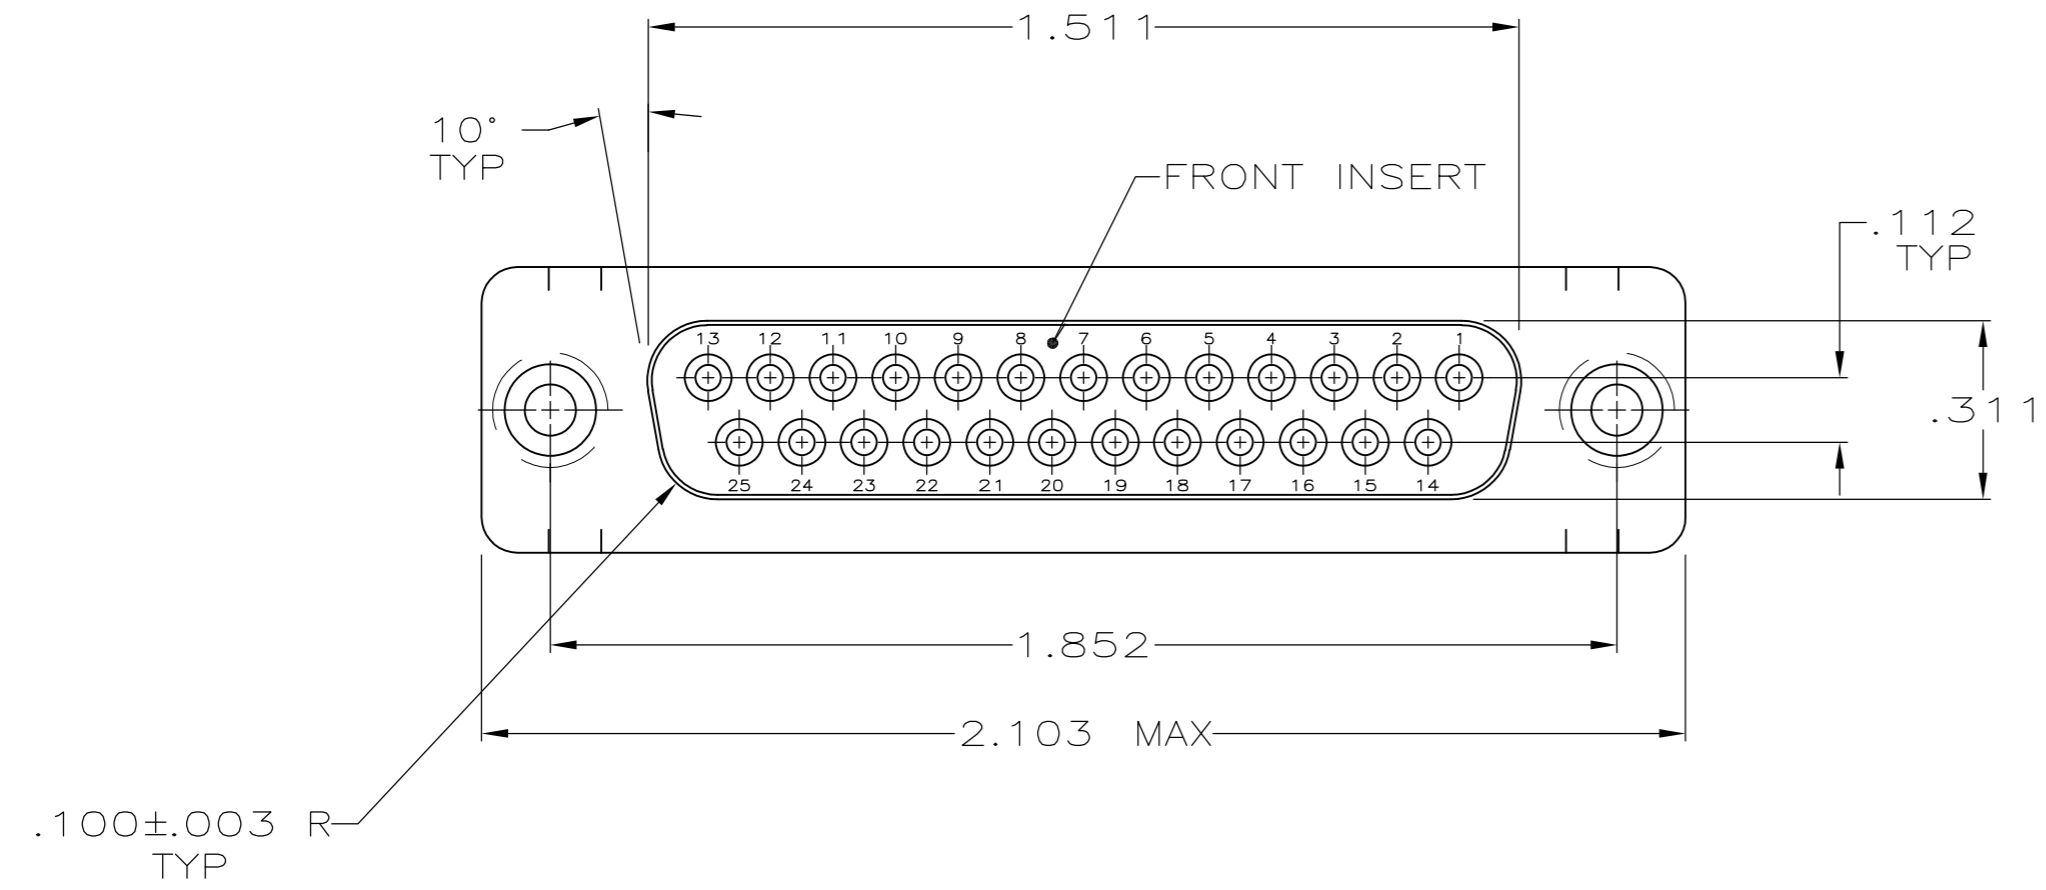

1. WIRE INSULATION SIZE RECOMMENDED FOR USE WITH THIS RECEPTACLE IS .068 DIA MAX.
  2. TO INSERT AND REMOVE CONTACTS USE TOOL 91067-2.
  3. CONTACT RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- △4 CARBON STEEL.
  - △5 ZINC PLATED YELLOW CHROMATE.
  - △6 .000200 MIN TIN OR TIN-LEAD PLATE OVER .000100 COPPER UNDERPLATE.
  - △7 GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK
  - △8 ZINC PLATED CLEAR CHROMATE.
  - △9 .000200 MIN TIN PLATE OVER .000100 MIN COPPER UNDERPLATE.
  - △10 ZINC PLATED .000200-.000400 THICK, YELLOW TRIVALENT CHROMIUM CHROMATE COATING.

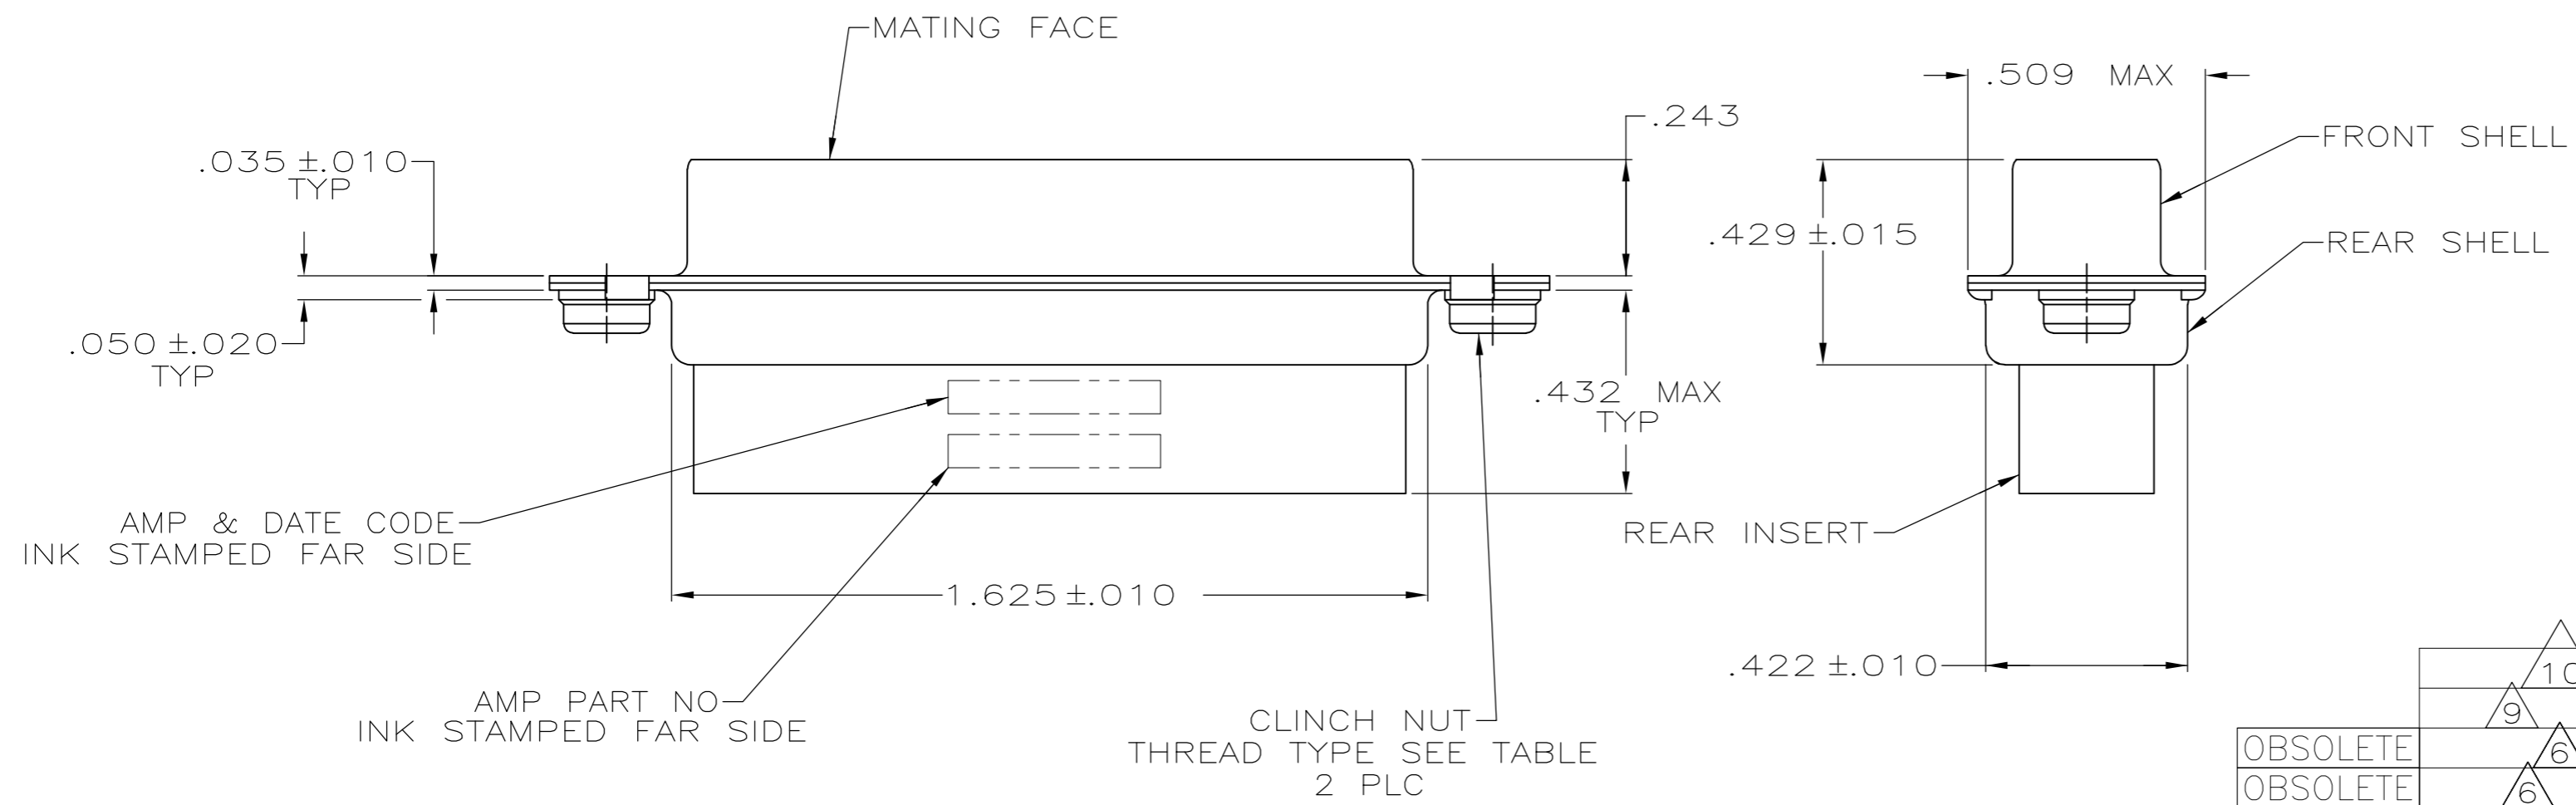

	△10	△8	4-40	207516-6
	△9	△8	4-40	207516-5
OBSOLETE	△6	△5	M-3	207516-4
OBSOLETE	△6	△8	4-40	207516-3
OBSOLETE	-	-	-	207516-2
OBSOLETE	△5	△8	4-40	207516-1
	SHELL FINISH	CLINCH NUT FINISH	THREAD	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	H MOLL	11 APR 91
CHK	R.STONE	17 APR 91
APVD	-	-
NAME	TE Connectivity	
PRODUCT SPEC	108-10020	
APPLICATION SPEC	-	
WEIGHT	-	-
SIZE	A2	00779
CAGE CODE	C=207516	-
DRAWING NO	207516	
RESTRICTED TO	-	
CUSTOMER DRAWING	SCALE 3:1	SHEET 1 of 1
		REV G