

› MWS2

› Monitoring Relays

› 3-Phase Monitoring Relays

› Din Rail Mount 17.5 mm Phase Sequence & Phase Failure

- › Control of 3-phase networks : phase sequence, total phase failure
- › Multi-voltage from 3 x 208 to 3 x 480 V
- › Controls its own supply voltage
- › True RMS measurement
- › LED status indication




Specifications			
Function	Nominal voltage (V)	Output	Code
Phase sequence, phase failure	3 x 208 → 3 x 440 V AC	2 single pole changeover relay	84873021
Power supply			
AC supply voltage frequency	50 / 60 Hz ± 10 %		
Galvanic isolation of power supply/measurement	No		
Immunity from micro power cuts	60 ms		
Inputs and measuring circuit			
Frequency of measured signal	50 → 60 Hz ± 10 %		
Outputs			
Type of contacts	No cadmium		
Max. breaking current	EMWS - MWS2 : 5 A AC/DC MWS : 8 A AC 250 V AC - 8 A DC 30 V DC		
Maximum rate	360 operations/hour at full load		
Operating categories acc. to IEC/EN 60947-5-1	AC12, AC13, AC14, AC15, DC12, DC13		
Insulation			
Insulation coordination (IEC/EN 60664-1)	Overvoltage category III : degree of pollution 3		
Rated impulse withstand voltage (IEC/EN 60664-1)	4 kV (1,2 / 50 µs)		
Dielectric strength (IEC/EN 60664-1)	2 kV AC 50 Hz 1 min.		
General characteristics			
Display relay	Yellow LED		
Casing	17,5 mm		
Mounting	On 35 mm symmetrical DIN rail, IEC/EN 60715		
Mounting position	All positions		
Material : enclosure plastic type VO to UL94 standard	Incandescent wire test according to IEC/EN 60695-2-11		
Protection (IEC/EN 60529)	Terminal block : IP20 Casing : IP30		
Operating temperature IEC/EN 60068-2	-20 → +50 °C		
Storage temperature IEC/EN 60068-2	-40 → +70 °C		

General characteristics	
Humidity IEC/EN 60068-2-30	2 x 24 hr cycle 95% RH max. without condensation 55 °C
Vibrations according to IEC/EN60068-2-6	10 → 150 Hz, A = 0.035 mm
Shocks IEC/EN 60068-2-6	5 g

Standards	
Product standard	IEC/EN 50178
Electromagnetic compatibility (EMC)	IEC/EN 61000-6-1, IEC/EN 61000-6-2, IEC/EN 61000-6-3, IEC/EN 61000-6-4
Certifications	MWS, MWS2 : CE, UL, CSA EMWS : CE, UL (cULus)
Conformity with environmental directives	RoHS

Dimensions

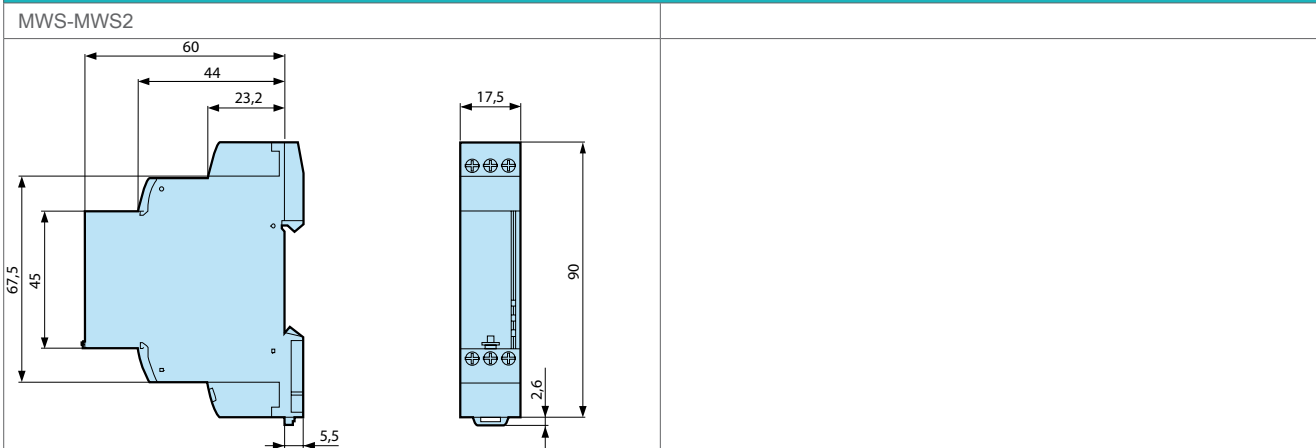

Connections

