

Type BLR-I-310

Fuse Block - Indicating

10 Pole – Regular Auto Blade



www.optifuse.com

(619) 593-5050

Specifications:

Max Current Rating: 30A per Circuit - 100A Max Input

Fuse Type: Regular Auto Blade – APR, ANR Series

Base: PBT (UL flame: 94V-0), Black

Cover: PC (UL flame: 94V-2), Transparent


Push Button: POM (White)

Terminals: Copper, Tin plated 0.250" Quick Connect Terminals

Indicating LED – Red

Ambient/Operating Temperature: -20 °C to +85 °C

Mechanical Dimensions: Inches [mm]

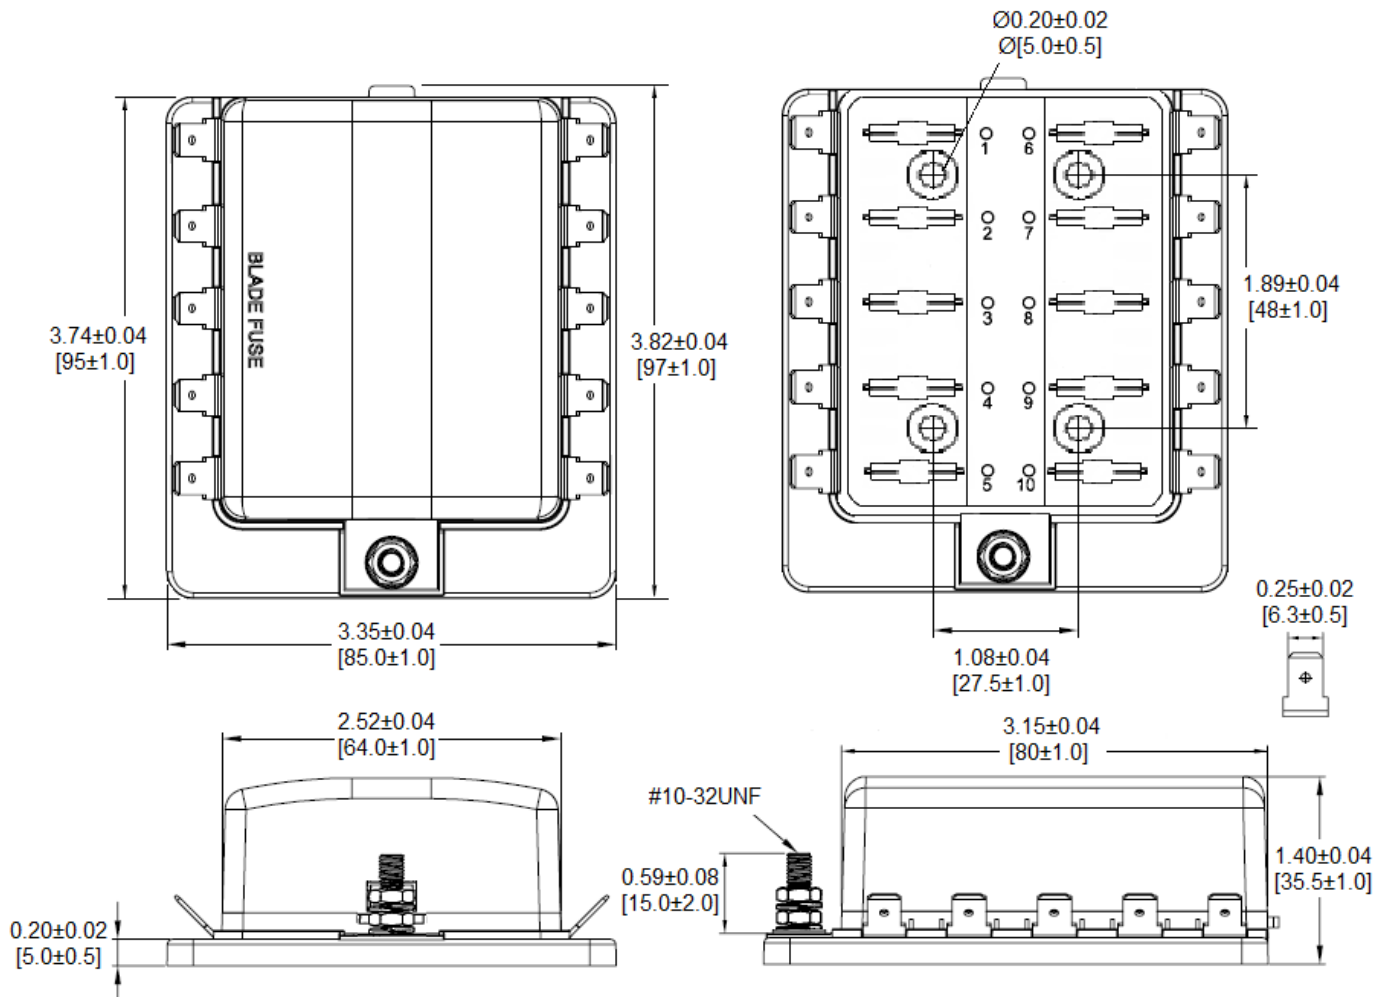

	<p>Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.</p>
	<p>-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.</p>

Note: All specifications subject to change without notice.

Rev C 05/2017 - Page: 1/1
Code S02-01H