

## D-SUB cable - VS-15-DSUB-20-LI-5,0 - 1656288

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled D-SUB cable shielded, 15-pos., stranded (7-wire), cable color RAL 7000 (gray), IP20 degree of protection, head 1 with socket shell 2 and straight cable outlet, head 2 with pin shell 2 and straight cable outlet, length: 5 m



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	324.1 g
Custom tariff number	85444290
Country of origin	China

### Technical data

#### Dimensions

Length of cable	5 m
-----------------	-----

#### Ambient conditions

Degree of protection	IP20
----------------------	------

#### General data

Number of positions	15
Signal type/category	Universal
Overvoltage category	III
Pollution degree	2

#### Characteristics head 1

Head type	Socket straight D-SUB 15
No. of positions (pin connector pattern)	15

#### Characteristics head 2

Head type	Plug straight D-SUB 15
-----------	------------------------

# D-SUB cable - VS-15-DSUB-20-LI-5,0 - 1656288

## Technical data

### Characteristics head 2

No. of positions (pin connector pattern)	15
--	----

## Classifications

### eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27060390

### ETIM


ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001408

### UNSPSC


UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

## Drawings

Dimensional drawing

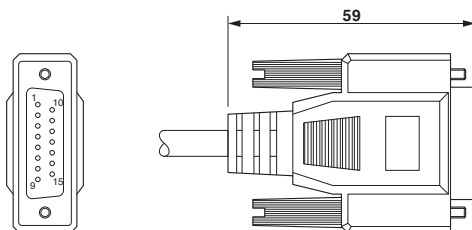


Dimensional drawing

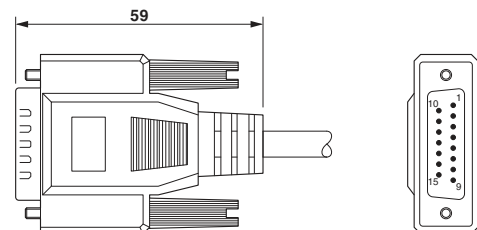


# D-SUB cable - VS-15-DSUB-20-LI-5,0 - 1656288

Circuit diagram

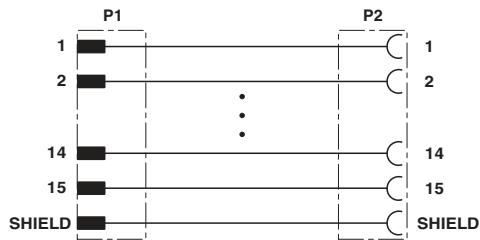

Schematic diagram



Schematic diagram

