


THIS DRAWING IS A CONTROLLED DOCUMENT, 0190620

USED ON

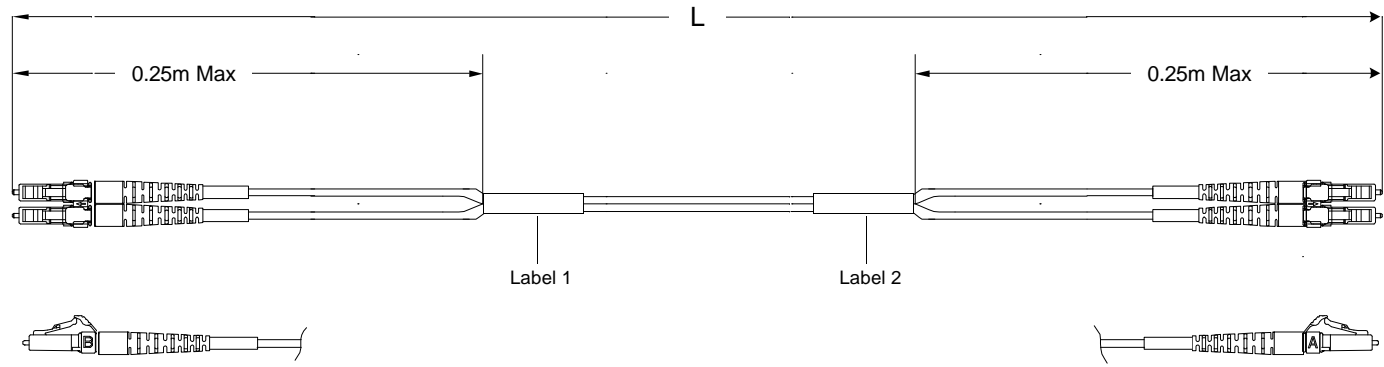

Left Side
 Connector(s): LC-Duplex Secure
 Mode: MM
 Housing Color: Aqua
 Geom. Spec: N/A

Fiber Path
 A - _____ - B
 B - _____ - A

Right Side
 Connector(s): LC-Duplex
 Mode: MM
 Housing Color: Beige
 Geom. Spec: N/A

- Notes:
- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
 - 2 Includes dust caps (not shown on print).
 - 3 IL tested at 1300nm.
 - 4 Label 2 will not be present on any cable assembly less than 5 meters long.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS. IT IS THE PROPERTY OF TYCO ELECTRONICS AND IS NOT TO BE DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

| | |
|------|----|
| LOC | CE |
| DIST | 16 |

| | | | | | | | |
|---|-------------|-----------------|-----------|-----|------|--|--|
| | | | | | | | |
| A | Rev Per EC# | RELEASE | 5/15/2007 | - | DF | | |
| P | LTR | REVISION RECORD | DATE | DIN | APVD | | |

| | |
|-------------|--|
| DIMENSIONS: | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
| meters | 0 PLC ± . |
| | 1 PLC ± . |
| | 2 PLC ± . |
| | 3 PLC ± . |
| | 4 PLC ± . |

Restricted To:

| | | | |
|-------|--|--|------------|
| DIN | Cable Assy Configurator | MATERIAL | HEAT TREAT |
| CHK | Dave Fennell | | |
| APVD | Dave Fennell | AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608 | |
| NAME | FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex | | |
| SCALE | SIZE | DRAWING NO | SHEET |
| NTS | A2 | C- 190620 | 1 of 4 |
| | | | REV |
| | | | A |

D
C
B
A

THIS DRAWING IS A CONTROLLED DOCUMENT.


| Part # | L (meters) | L (feet) | LC-Duplex Secure, Aqua | | LC-Duplex, Beige | |
|-------------|-----------------|-----------------|------------------------|---------|------------------|---------|
| | | | IL (dB) | RL (dB) | IL (dB) | RL (dB) |
| 0-1906020-1 | 0.950 - 1.050 | 3.11 - 3.44 | 0.5 | - | 0.5 | - |
| 0-1906020-2 | 1.950 - 2.050 | 6.39 - 6.72 | 0.5 | - | 0.5 | - |
| 0-1906020-3 | 2.950 - 3.050 | 9.67 - 10.00 | 0.5 | - | 0.5 | - |
| 0-1906020-4 | 3.920 - 4.080 | 12.86 - 13.38 | 0.51 | - | 0.51 | - |
| 0-1906020-5 | 4.920 - 5.080 | 16.14 - 16.66 | 0.51 | - | 0.51 | - |
| 0-1906020-6 | 5.920 - 6.080 | 19.42 - 19.94 | 0.51 | - | 0.51 | - |
| 0-1906020-7 | 6.920 - 7.080 | 22.70 - 23.22 | 0.51 | - | 0.51 | - |
| 0-1906020-8 | 7.920 - 8.080 | 25.98 - 26.50 | 0.51 | - | 0.51 | - |
| 0-1906020-9 | 8.850 - 9.150 | 29.03 - 30.01 | 0.51 | - | 0.51 | - |
| 1-1906020-0 | 9.850 - 10.150 | 32.31 - 33.30 | 0.52 | - | 0.52 | - |
| 1-1906020-1 | 10.850 - 11.150 | 35.59 - 36.58 | 0.52 | - | 0.52 | - |
| 1-1906020-2 | 11.850 - 12.150 | 38.87 - 39.86 | 0.52 | - | 0.52 | - |
| 1-1906020-3 | 12.850 - 13.150 | 42.15 - 43.14 | 0.52 | - | 0.52 | - |
| 1-1906020-4 | 13.850 - 14.150 | 45.43 - 46.42 | 0.52 | - | 0.52 | - |
| 1-1906020-5 | 14.850 - 15.150 | 48.72 - 49.70 | 0.52 | - | 0.52 | - |
| 1-1906020-6 | 15.840 - 16.160 | 51.96 - 53.01 | 0.52 | - | 0.52 | - |
| 1-1906020-7 | 16.830 - 17.170 | 55.21 - 56.33 | 0.53 | - | 0.53 | - |
| 1-1906020-8 | 17.820 - 18.180 | 58.46 - 59.64 | 0.53 | - | 0.53 | - |
| 1-1906020-9 | 18.810 - 19.190 | 61.71 - 62.95 | 0.53 | - | 0.53 | - |
| 2-1906020-0 | 19.800 - 20.200 | 64.96 - 66.27 | 0.53 | - | 0.53 | - |
| 2-1906020-1 | 20.790 - 21.210 | 68.20 - 69.58 | 0.53 | - | 0.53 | - |
| 2-1906020-2 | 21.780 - 22.220 | 71.45 - 72.90 | 0.53 | - | 0.53 | - |
| 2-1906020-3 | 22.770 - 23.230 | 74.70 - 76.21 | 0.53 | - | 0.53 | - |
| 2-1906020-4 | 23.760 - 24.240 | 77.95 - 79.52 | 0.54 | - | 0.54 | - |
| 2-1906020-5 | 24.750 - 25.250 | 81.20 - 82.84 | 0.54 | - | 0.54 | - |
| 2-1906020-6 | 25.740 - 26.260 | 84.44 - 86.15 | 0.54 | - | 0.54 | - |
| 2-1906020-7 | 26.730 - 27.270 | 87.69 - 89.46 | 0.54 | - | 0.54 | - |
| 2-1906020-8 | 27.720 - 28.280 | 90.94 - 92.78 | 0.54 | - | 0.54 | - |
| 2-1906020-9 | 28.710 - 29.290 | 94.19 - 96.09 | 0.54 | - | 0.54 | - |
| 3-1906020-0 | 29.700 - 30.300 | 97.44 - 99.40 | 0.55 | - | 0.55 | - |
| 3-1906020-1 | 30.690 - 31.310 | 100.68 - 102.72 | 0.55 | - | 0.55 | - |
| 3-1906020-2 | 31.680 - 32.320 | 103.93 - 106.03 | 0.55 | - | 0.55 | - |
| 3-1906020-3 | 32.670 - 33.330 | 107.18 - 109.35 | 0.55 | - | 0.55 | - |
| 3-1906020-4 | 33.660 - 34.340 | 110.43 - 112.66 | 0.55 | - | 0.55 | - |
| 3-1906020-5 | 34.650 - 35.350 | 113.68 - 115.97 | 0.55 | - | 0.55 | - |
| 3-1906020-6 | 35.640 - 36.360 | 116.92 - 119.29 | 0.55 | - | 0.55 | - |
| 3-1906020-7 | 36.630 - 37.370 | 120.17 - 122.60 | 0.56 | - | 0.56 | - |
| 3-1906020-8 | 37.620 - 38.380 | 123.42 - 125.91 | 0.56 | - | 0.56 | - |
| 3-1906020-9 | 38.610 - 39.390 | 126.67 - 129.23 | 0.56 | - | 0.56 | - |
| 4-1906020-0 | 39.600 - 40.400 | 129.92 - 132.54 | 0.56 | - | 0.56 | - |
| 4-1906020-1 | 40.590 - 41.410 | 133.16 - 135.85 | 0.56 | - | 0.56 | - |
| 4-1906020-2 | 41.580 - 42.420 | 136.41 - 139.17 | 0.56 | - | 0.56 | - |

| Qty | U of M | Description | Item No. |
|-----|--------|---|----------|
| 2 | piece | Trace Label | 7 |
| 4 | piece | Eyelet/Shrink tube assembly - White | 6 |
| AR | meter | 2 fiber, 50/125, 2.0mm, Twinzip, Orange, OFNR (Riser) | 5 |
| 2 | piece | LC Connector Assy, 1.6mm-2.0mm, MM | 4 |
| 2 | piece | LC Connector Assy, MM | 3 |
| 2 | piece | LC Duplex clip, black | 2 |
| 4 | piece | LC, SC, FC Straight Boot, Beige | 1 |

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE DISCLOSED TO ANY OTHER PERSONS OR ORGANIZATIONS WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

| | | | | | |
|---------|-----|-----------------|-----------|-----|------|
| Rev Per | EC# | RELEASE | 5/15/2007 | - | DF |
| P | LTR | REVISION RECORD | DATE | DIN | APVD |



RESTRICTED TO:

| | | | | | |
|-------|--|---|----|------------|------------|
| DIN | Cable Assy Configurator | MATERIAL | - | HEAT TREAT | - |
| CHK | Dave Fennell | Tyco Electronics, Inc. Harrisburg, PA 17105-3608 | | | |
| APVD | Dave Fennell | | | | |
| NAME | FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex | | | | |
| SCALE | NTS | SIZE | A2 | DRAWING NO | C- 1906020 |
| SHEET | 2 of 4 | REV | A | | |

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT. Dwg. No.

| Part # | L (meters) | L (feet) | LC-Duplex Secure, Aqua | | LC-Duplex, Beige | |
|-------------|-----------------|-----------------|------------------------|---------|------------------|---------|
| | | | IL (dB) | RL (dB) | IL (dB) | RL (dB) |
| 4-1906020-3 | 42.570 - 43.430 | 139.66 - 142.48 | 0.56 | - | 0.56 | - |
| 4-1906020-4 | 43.560 - 44.440 | 142.91 - 145.80 | 0.57 | - | 0.57 | - |
| 4-1906020-5 | 44.550 - 45.450 | 146.16 - 149.11 | 0.57 | - | 0.57 | - |
| 4-1906020-6 | 45.540 - 46.460 | 149.40 - 152.42 | 0.57 | - | 0.57 | - |
| 4-1906020-7 | 46.530 - 47.470 | 152.65 - 155.74 | 0.57 | - | 0.57 | - |
| 4-1906020-8 | 47.520 - 48.480 | 155.90 - 159.05 | 0.57 | - | 0.57 | - |
| 4-1906020-9 | 48.510 - 49.490 | 159.15 - 162.36 | 0.57 | - | 0.57 | - |
| 5-1906020-0 | 49.500 - 50.500 | 162.40 - 165.68 | 0.58 | - | 0.58 | - |
| 5-1906020-1 | 50.490 - 51.510 | 165.64 - 168.99 | 0.58 | - | 0.58 | - |
| 5-1906020-2 | 51.480 - 52.520 | 168.89 - 172.30 | 0.58 | - | 0.58 | - |
| 5-1906020-3 | 52.470 - 53.530 | 172.14 - 175.62 | 0.58 | - | 0.58 | - |
| 5-1906020-4 | 53.460 - 54.540 | 175.39 - 178.93 | 0.58 | - | 0.58 | - |
| 5-1906020-5 | 54.450 - 55.550 | 178.64 - 182.25 | 0.58 | - | 0.58 | - |
| 5-1906020-6 | 55.440 - 56.560 | 181.88 - 185.56 | 0.58 | - | 0.58 | - |
| 5-1906020-7 | 56.430 - 57.570 | 185.13 - 188.87 | 0.59 | - | 0.59 | - |
| 5-1906020-8 | 57.420 - 58.580 | 188.38 - 192.19 | 0.59 | - | 0.59 | - |
| 5-1906020-9 | 58.410 - 59.590 | 191.63 - 195.50 | 0.59 | - | 0.59 | - |
| 6-1906020-0 | 59.400 - 60.600 | 194.88 - 198.81 | 0.59 | - | 0.59 | - |
| 6-1906020-1 | 60.390 - 61.610 | 198.12 - 202.13 | 0.59 | - | 0.59 | - |
| 6-1906020-2 | 61.380 - 62.620 | 201.37 - 205.44 | 0.59 | - | 0.59 | - |
| 6-1906020-3 | 62.370 - 63.630 | 204.62 - 208.75 | 0.59 | - | 0.59 | - |
| 6-1906020-4 | 63.360 - 64.640 | 207.87 - 212.07 | 0.6 | - | 0.6 | - |
| 6-1906020-5 | 64.350 - 65.650 | 211.12 - 215.38 | 0.6 | - | 0.6 | - |
| 6-1906020-6 | 65.340 - 66.660 | 214.37 - 218.70 | 0.6 | - | 0.6 | - |
| 6-1906020-7 | 66.330 - 67.670 | 217.61 - 222.01 | 0.6 | - | 0.6 | - |
| 6-1906020-8 | 67.320 - 68.680 | 220.86 - 225.32 | 0.6 | - | 0.6 | - |
| 6-1906020-9 | 68.310 - 69.690 | 224.11 - 228.64 | 0.6 | - | 0.6 | - |
| 7-1906020-0 | 69.300 - 70.700 | 227.36 - 231.95 | 0.61 | - | 0.61 | - |
| 7-1906020-1 | 70.290 - 71.710 | 230.61 - 235.26 | 0.61 | - | 0.61 | - |
| 7-1906020-2 | 71.280 - 72.720 | 233.85 - 238.58 | 0.61 | - | 0.61 | - |
| 7-1906020-3 | 72.270 - 73.730 | 237.10 - 241.89 | 0.61 | - | 0.61 | - |
| 7-1906020-4 | 73.260 - 74.740 | 240.35 - 245.20 | 0.61 | - | 0.61 | - |
| 7-1906020-5 | 74.250 - 75.750 | 243.60 - 248.52 | 0.61 | - | 0.61 | - |
| 7-1906020-6 | 75.240 - 76.760 | 246.85 - 251.83 | 0.61 | - | 0.61 | - |
| 7-1906020-7 | 76.230 - 77.770 | 250.09 - 255.15 | 0.62 | - | 0.62 | - |
| 7-1906020-8 | 77.220 - 78.780 | 253.34 - 258.46 | 0.62 | - | 0.62 | - |
| 7-1906020-9 | 78.210 - 79.790 | 256.59 - 261.77 | 0.62 | - | 0.62 | - |
| 8-1906020-0 | 79.200 - 80.800 | 259.84 - 265.09 | 0.62 | - | 0.62 | - |

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS AFFILIATES. IT IS TO BE KEPT SECRET AND NOT DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

| | | | | | | | | | |
|---|---------|-----|-----------------|-----------|-----|------|--|--|--|
| | | | | | | | | | |
| A | Rev Per | EC# | RELEASE | 5/15/2007 | - | DF | | | |
| P | LTR | | REVISION RECORD | DATE | DIN | APVD | | | |

RESTRICTED TO:

| | |
|-----------------------|---|
| DIMENSIONS: meters | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
| 9 PL C | ± .001 |
| 1 PL C | ± .001 |
| 2 PL C | ± .001 |
| 3 PL C | ± .001 |
| 4 PL C | ± .001 |

| | | | | | |
|-------|--|------------|--------|------------|--|
| DIN | Cable Assy Configurator | MATERIAL | | HEAT TREAT | |
| CHK | Dave Fennell | | | | |
| APVD | Dave Fennell | | | | |
| NAME | FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex | | | | |
| SCALE | SIZE | DRAWING NO | SHEET | REV | |
| NTS | A2 | C- 1906020 | 3 of 4 | A | |



USED ON

Label 1

Per specification 107-1645-1



Trace # - Bar Code

Trace # - Human Readable

Part Number

Country of Origin

This label is used on all lengths on this drawing.

Label 2

Per specification 107-1645-1



Trace # - Bar Code

Trace # - Human Readable

Part Number

Country of Origin

This label is used on all lengths on this drawing.

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THIS DRAWING. IT IS NOT TO BE DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

| | | | | | | | |
|---|---------|-----|-----------------|-----------|-----|------|--|
| | | | | | | | |
| A | Rev Per | EC# | RELEASE | 5/15/2007 | - | DF | |
| P | LTR | | REVISION RECORD | DATE | DIN | APVD | |

| | |
|-------------|--|
| DIMENSIONS: | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
| meters | |
| | 0 PLC ± . |
| | 1 PLC ± . |
| | 2 PLC ± . |
| | 3 PLC ± . |
| | 4 PLC ± . |

Restricted To:

| | | | | | |
|-------|--|----------|----|------------|------------|
| DIN | Cable Assy Configurator | MATERIAL | | HEAT TREAT | |
| CHK | Dave Fennell | | | | |
| APVD | Dave Fennell | | | | |
| NAME | FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex | | | | |
| SCALE | NTS | SIZE | A2 | DRAWING NO | C- 1906020 |
| SHEET | 4 of 4 | REV | A | | |

D
C
B
A