

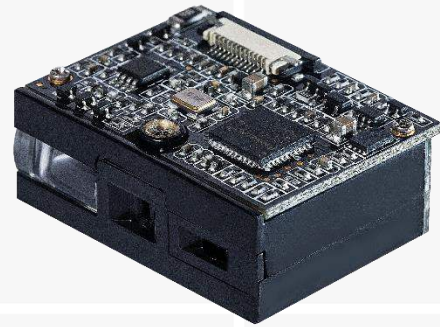




Newland AIDC
Scanning Made Simple



NLS-EM1365-LD

OEM SCAN ENGINE

FEATURES

○ **UIMG® Technology**

The NLS-EM1365-LD's core technology **UIMG®** is independently developed by Newland, comprising optical system, digitizer, decoder, image processor and embedded system. The device demonstrates an unprecedented decoding capability on all mainstream ID symbologies.

○ **Easy to use**

Simple parameter configuration.

○ **Two-In-One Design**

Seamless integration of imager and decoder board makes the scan engine small, lightweight and easy for integration.

○ **Low power consumption**

The scan engine provides a laser-generated crosshair aiming pattern that is clear and bright even in bright sunlight, ensuring first time accurate aim.



ID Barcode



RS232



USB

NLS-EM1365-LD

Performance

Image Sensor		1500 Linear imager
Illumination		LED (610nm ~ 640nm)
Symbologies	ID	EAN-13, EAN-8, UPC-A, UPC-E, ISSN, ISBN, Codabar, Code 128, Code 93, ITF-6, ITF-14, Interleaved 2 of 5, Industrial 2 of 5, Standard 2 of 5, Matrix 2 of 5, GSI Databar, Code 39, Code 11, MSI-Plessey, Plessey.
Resolution*		≥4mil
Typical Depth of Field*	EAN-13	55mm ~ 450mm (13mil)
	Code 39	70mm~155mm (5mil)
Min. Symbol Contrast*		30%
Scan Angle**		Roll: 360°, Pitch: ±60°, Skew: ±60°
Field of View		Horizontal 42°, Vertical 28°

Physical

Interface		TTL-232, USB1.1
Operating Voltage		3.3VDC±5%
Rated Power Consumption		71.1mW (typical)
Current@5VDC	Operating	21.6mA (typical), 53.9mA (max.)
	Idle	10.6mA
Dimensions		28.3(W)×22.0(D)×11.8(H)mm
Weight		6.0g

Environmental

Operating Temperature		-20°C to 55°C (-4°F to 131°F)
Storage Temperature		-40°C to 70°C (-40°F to 158°F)
Humidity		5% to 95% (non-condensing)
Ambient Light		0-100,000lux (natural light)

Certificates

Certificates & Protection		FCC Part15 Class B; CE EMC Class B, RoHS
---------------------------	--	--

Accessories

NLS-EVK		Software development board, equipped with a trigger button, beeper and RS-232 & USB interfaces.
Cable	RS-232 Cable	Used to connect the NLS-EVK to a host device; equipped with a power connector.
	USB Cable	Used to connect the NLS-EVK3000 to a host device.
Power Adapter		DC5V power adapter, used to provide power for the NLS-EVK.

*Test conditions: T=23°C; Illumination=300lux using incandescent lamp; sample printed barcodes made by Newland.

**Test conditions: Scan Distance= (min. DOF + max. DOF)/2; T=23°C; Illumination=300lux using incandescent lamp;

ID: EAN-13 (13mil).

Specifications are subject to change without notice.

Version: V1.1

Newland AIDC

Add: No.1 Rujiang West Rd.,
Mawei, Fuzhou, Fujian 350001, China
Tel: +86-591-83979500
Fax: +86-591-83979216
Email: info@nlsan.com
Web: www.newlandaidc.com

North America&Latin America

Add: 48559 Fremont Blvd.,
Fremont, CA 94538, USA
Tel: +1 510 490 3888
Fax: +1 510 490 3887
Email: info@nlsan.com
Web: www.newlandamerica.com

Europe & Middle East

Add: Rolweg 25, 4104 AV Culemborg,
The Netherlands
Tel: +31 (0) 345 87 00 33
Email: sales@newland-id.com
Tech Support: tech-support@newland-id.com
Web: www.newland-id.com

Asia Pacific

Taiwan:
Add: 7F-6, No. 268, Liancheng Rd.,
Jhonghe Dist. 235, New Taipei City, Taiwan
Tel: +886 2 7731 5388
Email: info@newland-id.com.tw