

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	510650800	Micro-Latch 2.0 Rec Housing 8P	2	PC
C	503728000	Micro-Latch 2.0 Crimp R Term Tin #22-26	16	PC
D	--	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B8	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	B7	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	B6	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	B5	1X22AWG DISC SR-PVC BK UL10002	BLACK
A5	B4	1X22AWG DISC SR-PVC BK UL10002	BLACK
A6	B3	1X22AWG DISC SR-PVC BK UL10002	BLACK
A7	B2	1X22AWG DISC SR-PVC BK UL10002	BLACK
A8	B1	1X22AWG DISC SR-PVC BK UL10002	BLACK

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

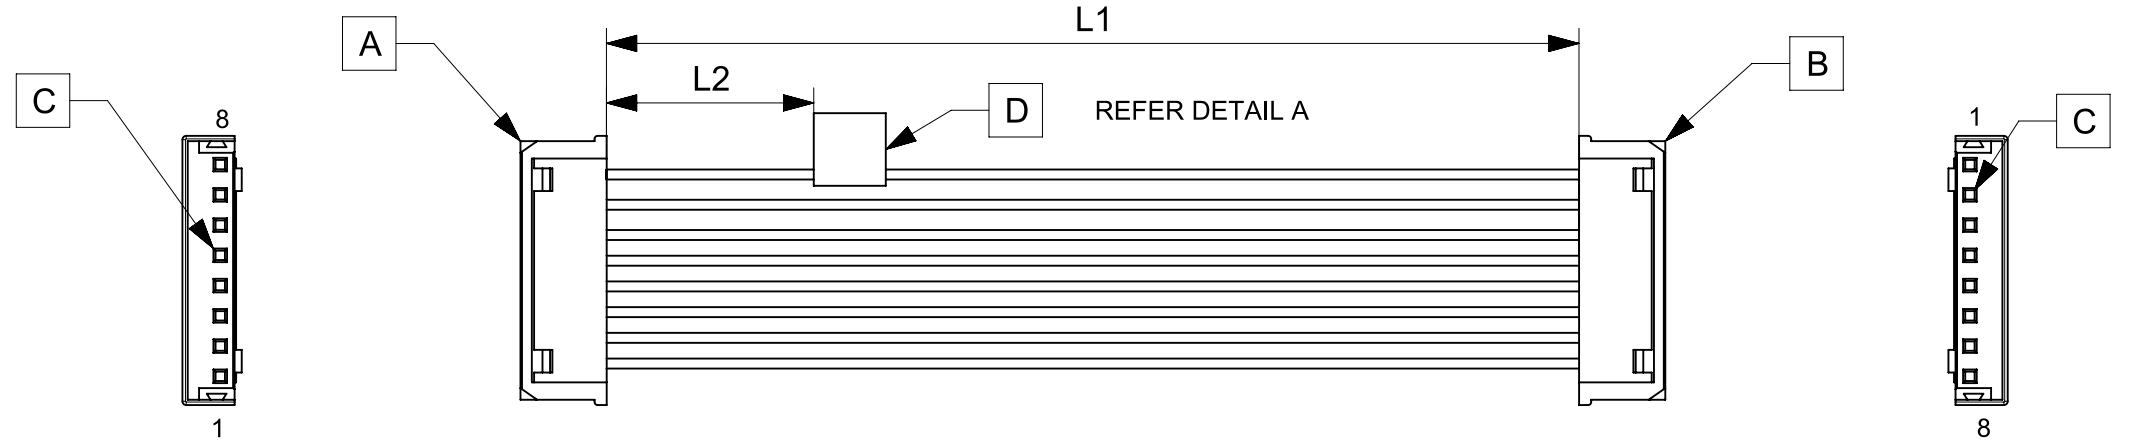


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2196781080	50±3	15	Micro Latch 2.0 R-R 8ckt 50mm disc Sn
2196781081	100±3	15	Micro Latch 2.0 R-R 8ckt 100mm disc Sn
2196781082	150±4	15	Micro Latch 2.0 R-R 8ckt 150mm disc Sn
2196781083	300±4	15	Micro Latch 2.0 R-R 8ckt 300mm disc Sn
2196781084	600±6	15	Micro Latch 2.0 R-R 8ckt 600mm disc Sn

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2022/02/27	A	INITIAL RELEASE	SAIKIG

- NOTES**
1. Cable assembly must pass 100% continuity and polarity test.
 2. Connector view shown is from mating side.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$	DIMENSION UNITS: mm SCALE: NTS GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL: ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	CURRENT REV DESC: EC NO: 697300 DRWN: SAIKIG 2022/02/21 CHK'D: MNARAYAN01 2022/03/08 APPR: MNARAYAN01 2022/03/08 INITIAL REVISION: DRWN: SAIKIG 2022/02/21 APPR: MNARAYAN01 2022/03/08			
			SEE TABLE		
			PRODUCT CUSTOMER DRAWING		
			DOCUMENT NUMBER: 2196781080 DOC TYPE: PSD DOC PART: 000 REVISION: A		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: A4-SIZE	SERIES: 219678	MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1