

SPECIFICATION CONTROL DRAWING


55PC1821

TITLE
TWO CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

Date
1-22-93

Revision
A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

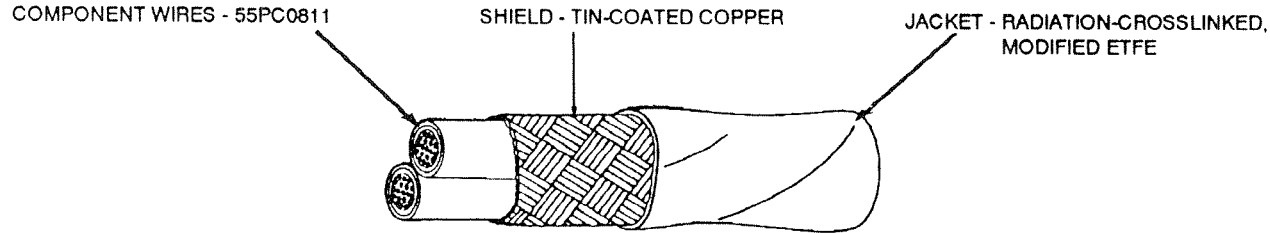

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1821-24.*	24	38	.0055	.0070	.114	.118	.122	10.32	10.77
55PC1821-22.*	22	38	.0055	.0070	.126	.130	.134	12.93	13.42
55PC1821-20.*	20	38	.0055	.0070	.143	.147	.151	17.00	17.56
55PC1821-18.*	18	38	.0060	.0075	.163	.168	.173	22.96	23.73
55PC1821-16.*	16	38	.0060	.0075	.179	.184	.189	27.68	28.48
55PC1821-14.*	14	38	.0060	.0075	.210	.216	.223	39.18	40.32
55PC1821-12.*	12	38	.0060	.0080	.248	.254	.259	55.53	56.80

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The *** in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 22, red and blue component wires; white jacket: 55PC1821-22-2/6-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 (415) 361 3333 TWX 910 373 1728