



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE4000 & NTE4000T Integrated Circuit CMOS, Dual 3-Input NOR Gate Plus Inverter

Description:

The NTE4000 (14-Lead DIP) and NTE4000T (SOIC-14) are dual 3-input NOR gate plus inverter devices constructed with MOS P-Channel and N-Channel enhancement mode devices in a single monolithic structure. These complementary MOS logic gates find primary use where low power dissipation and/or high noise immunity is desired.

Features:

- Diode Protection on All Inputs
- Supply Voltage Range: 3Vdc to 18Vdc
- Logic Swing Independent of Fanout

Absolute Maximum Ratings: (Voltages referenced to V_{SS} , Note 1)

DC Supply Voltage, V_{DD}	-0.5 to +18.0V
Input Voltage (DC or Transient), V_{in}	-0.5 to V_{DD} to +0.5V
Output Voltage (DC or Transient), V_{out}	-0.5 to V_{DD} to +0.5V
Input Current (DC or Transient, Per Pin), I_{in}	± 10 mA
Output Current (DC or Transient, Per Pin), I_{out}	± 10 mA
Power Dissipation (Per Package), P_D	500mW
Temperature Derating (from +65° to +125°C)	-7.0mW/°C
Storage Temperature, T_{stg}	-65° to +150°C
Lead Temperature (During Soldering, 8sec max), T_L	+260°C

Note 1. Maximum Ratings are those values beyond which damage to the device may occur.

Electrical Characteristics: (Voltages referenced to V_{SS} , Note 2)

Parameter	Symbol	V_{DD} Vdc	-55°C		+25°C			+125°C		Unit	
			Min	Max	Min	Typ	Max	Min	Max		
Output Voltage “0” Level $V_{in} = V_{DD}$ or 0	V_{OL}	5.0	–	0.05	–	0	0.05	–	0.05	Vdc	
		10	–	0.05	–	0	0.05	–	0.05	Vdc	
		15	–	0.05	–	0	0.05	–	0.05	Vdc	
	“1” Level $V_{in} = 0$ or V_{DD}	V_{OH}	5.0	4.95	–	4.95	5.0	–	4.95	–	Vdc
			10	9.95	–	9.95	10	–	9.95	–	Vdc
			15	14.95	–	14.95	15	–	14.95	–	Vdc
Input Voltage ($V_O = 4.5$ Vdc) ($V_O = 9.0$ Vdc) ($V_O = 13.5$ Vdc) ($V_O = 0.5$ Vdc) ($V_O = 1.0$ Vdc) ($V_O = 1.5$ Vdc)	“0” Level V_{IL}	5.0	–	1.0	–	2.25	1.0	–	1.0	Vdc	
		10	–	2.0	–	4.50	2.0	–	2.0	Vdc	
		15	–	2.5	–	6.75	2.5	–	2.5	Vdc	
	“1” Level V_{IH}	V_{IH}	5.0	4.0	–	4.0	2.75	–	4.0	–	Vdc
			10	8.0	–	8.0	5.50	–	8.0	–	Vdc
			15	12.5	–	12.5	8.25	–	12.5	–	Vdc
Output Drive Current Source ($V_{OH} = 2.5$ Vdc) ($V_{OH} = 4.6$ Vdc) ($V_{OH} = 9.5$ Vdc) ($V_{OH} = 13.5$ Vdc) Sink ($V_{OL} = 0.4$ Vdc) ($V_{OL} = 0.5$ Vdc) ($V_{OL} = 1.5$ Vdc)	I_{OH}	5.0	-1.2	–	-1.0	-1.7	–	-0.7	–	mAdc	
		5.0	-0.25	–	-0.2	-0.36	–	-0.14	–	mAdc	
		10	-0.62	–	-0.5	-0.9	–	-0.35	–	mAdc	
		15	-1.8	–	-1.5	-1.5	–	-1.1	–	mAdc	
	I_{OL}	I_{OL}	5.0	0.64	–	0.51	0.88	–	0.36	–	mAdc
			10	1.6	–	1.3	2.25	–	0.9	–	mAdc
15			4.2	–	3.4	8.8	–	2.4	–	mAdc	
Input Current	I_{in}	15	–	±0.1	–	±0.00001	±0.1	–	±0.1	Adc	
Input Capacitance ($V_{IN} = 0$)	C_{in}	–	–	–	–	5.0	7.5	–	–	pF	
Quiescent Current (Per Package)	I_{DD}	5.0	–	0.25	–	0.0005	0.25	–	7.5	Adc	
		10	–	0.5	–	0.0010	0.5	–	15	Adc	
		15	–	1.0	–	0.0015	1.0	–	30	Adc	
Total Supply Current (Dynamic plus Quiescent, Per Gate, $C_L = 50$ pF, Note 3, Note 4)	I_T	5.0	$I_T = (0.3 \text{ A/kHz}) f + I_{DD}/N$							Adc	
		10	$I_T = (0.6 \text{ A/kHz}) f + I_{DD}/N$							Adc	
		15	$I_T = (0.8 \text{ A/kHz}) f + I_{DD}/N$							Adc	

Note 2. Data labeled “Typ” is not to be used for design purposes but is intended as an indication of the device’s potential performance.

Note 3. The formulas given are for the typical characteristics only at +25°C.

Note 4. To calculate total supply current at loads other than 50pF:

$$I_T(C_L) = I_T(50\text{pF}) + (C_L - 50) V_{fk}$$


where: I_T is in A (per package), C_L in pF, $V = (V_{DD} - V_{SS})$ in volts, f in kHz is input frequency, and $k = 0.001 \times$ the number of exercised gates per package.

Switching Characteristics: ($C_L = 50\text{pF}$, $T_A = +25^\circ\text{C}$, Note 2)


Parameter	Symbol	V_{DD} Vdc	Min	Typ	Max	Unit
Output Rise Time $t_{TLH} = (3.0\text{ns/pf}) C_L + 30\text{ns}$ $t_{TLH} = (1.5\text{ns/pf}) C_L + 15\text{ns}$ $t_{TLH} = (1.1\text{ns/pf}) C_L + 10\text{ns}$	t_{TLH}	5.0	-	180	360	ns
		10	-	90	180	ns
		15	-	65	130	ns
Output Fall Time $t_{THL} = (3.0\text{ns/pf}) C_L + 30\text{ns}$ $t_{THL} = (1.5\text{ns/pf}) C_L + 15\text{ns}$ $t_{THL} = (1.1\text{ns/pf}) C_L + 10\text{ns}$	t_{THL}	5.0	-	100	200	ns
		10	-	50	100	ns
		15	-	40	80	ns
Propagation Delay Time $t_{PLH}, t_{PHL} = (1.7\text{ns/pf}) C_L + 30\text{ns}$ $t_{PLH}, t_{PHL} = (0.66\text{ns/pf}) C_L + 22\text{ns}$ $t_{PLH}, t_{PHL} = (0.50\text{ns/pf}) C_L + 15\text{ns}$	t_{PLH}, t_{PHL}	5.0	-	115	230	ns
		10	-	55	110	ns
		15	-	40	80	ns

Note 2. Data labeled "Typ" is not to be used for design purposes but is intended as an indication of the device's potential performance.


Note 3. The formulas given are for the typical characteristics only at +25°C.

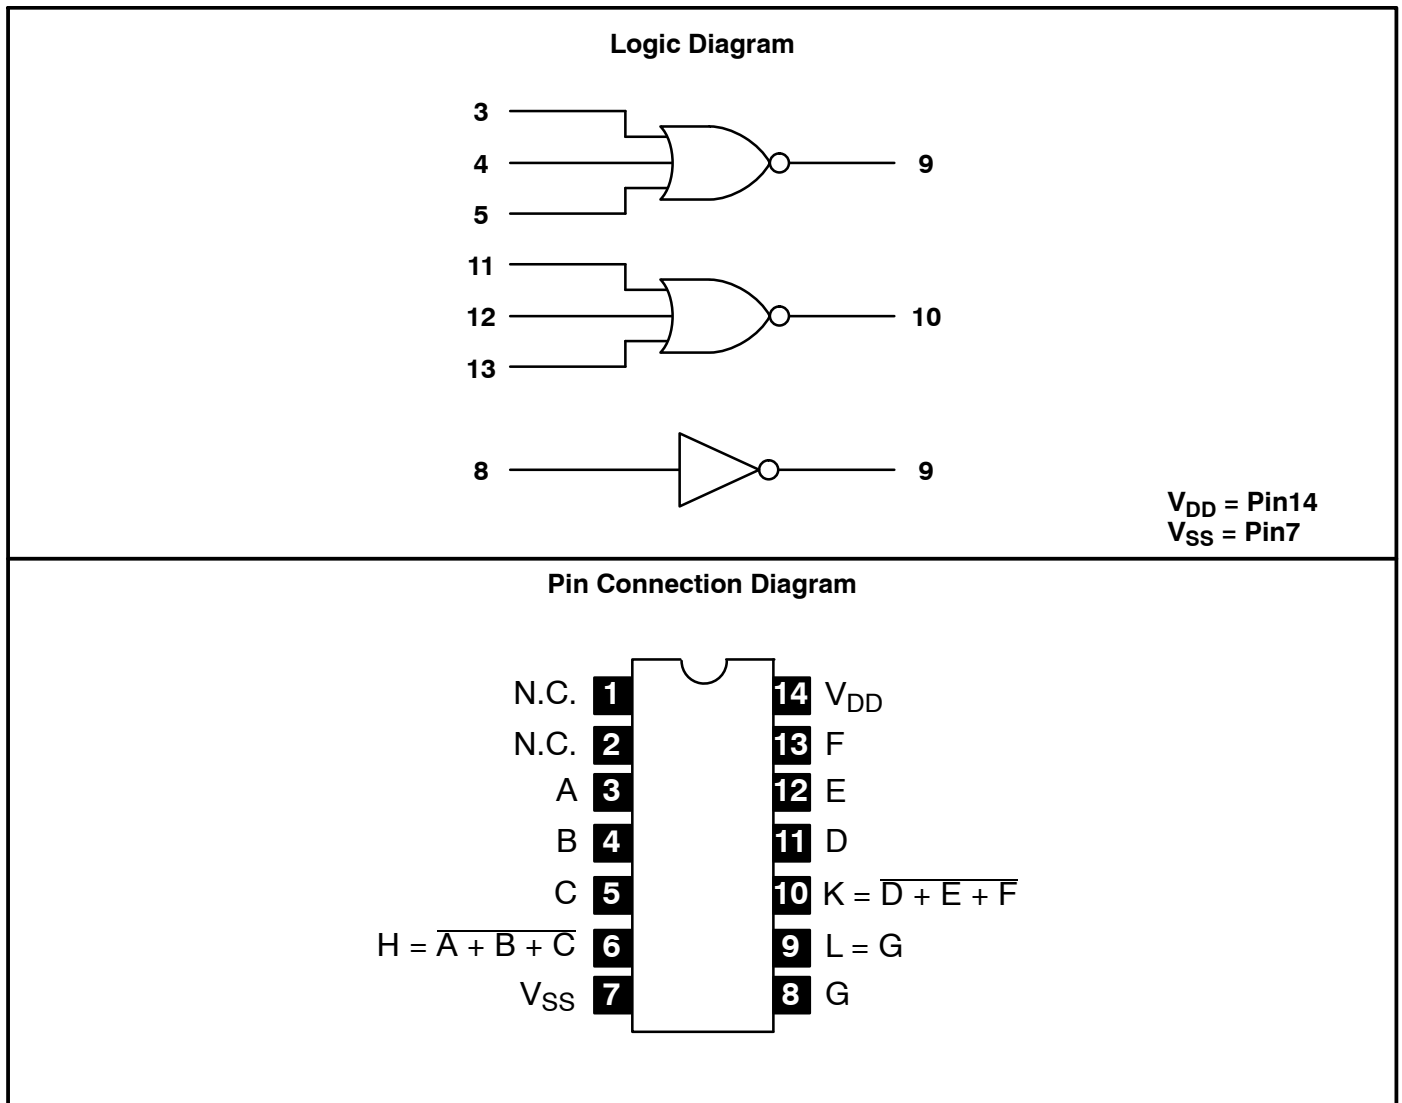

NTE4000

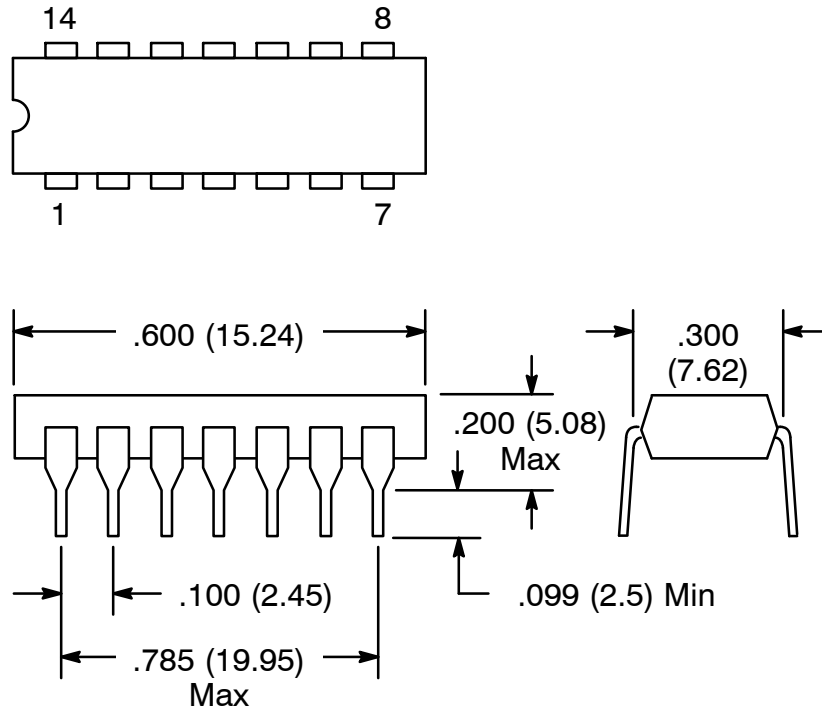

NTE4000T

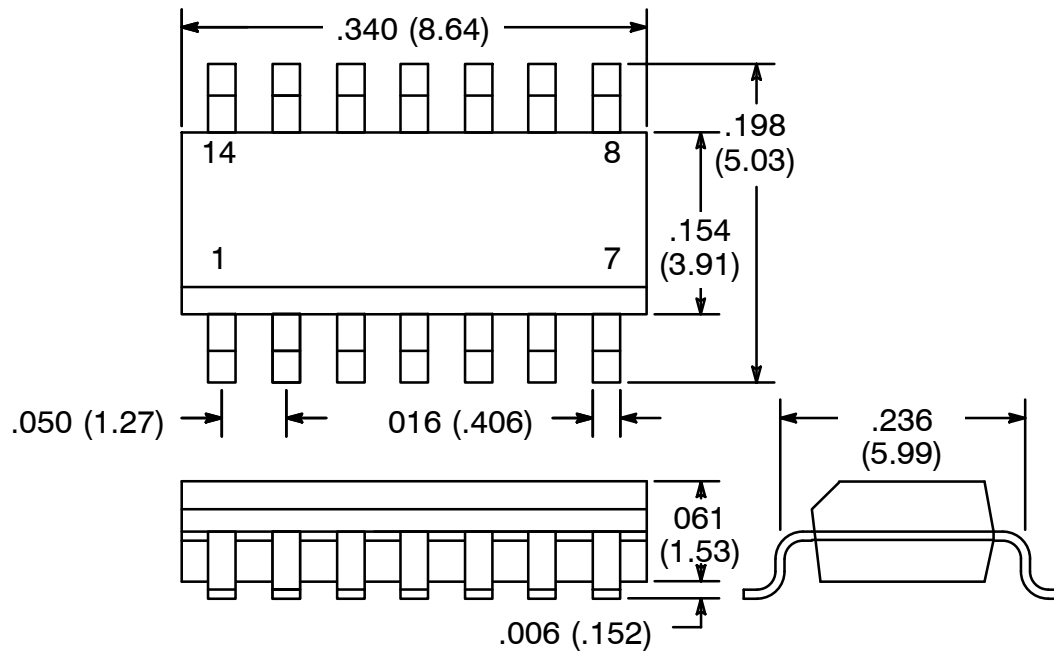

NOTE: Pin1 on Beveled Edge