

6

5

4

3




2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/17/07	

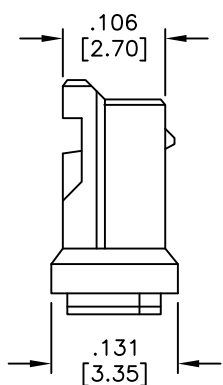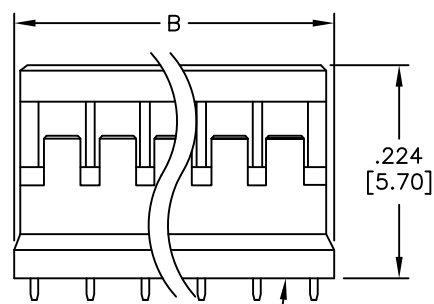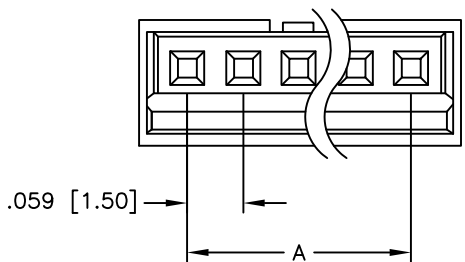

**SPECIFICATIONS:**

**Material:**

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Ivory

**Plating:**

Tin over Nickel underplate overall

**Electrical:**

Operating voltage: 100 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**

Operating temperature: -25°C to +85°C

**Environmental:**

Lead free, RoHS compliant.



A=.059 [1.50] X NO. OF SPACES

B=.059 [1.50] X NO. OF SPACES +.102 [2.60]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		<b>ADAM TECH</b> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES			
.X ± .10	Ø.X ± .10	TITLE MX1.5mm HOUSING	
.XX ± .020	Ø.XX ± .015		
.XXX ± .015	Ø.XXX ± .010		
APPROVALS		DATE	
DRAWN	BW	01/17/07	
CHECKED		SIZE X	PART NO. 15CH-B-XX
APPROVED		REF:	SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1