

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 26 AWG 0.14 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 7$
 Resistance at 20 °C: 150 Ω /km max


Outer jacket


Material: PVC
 Color: black
 Diameter: 2.7 ± 0.15 mm
 Nominal thickness: 0.40 mm
 Resistance at 20 °C: 10 M Ω /km min

Wire marking: E339579 UL AWM STYLE 2468 26 AWG 80°C
 300V VW-1 - - - cUL AWM I A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking

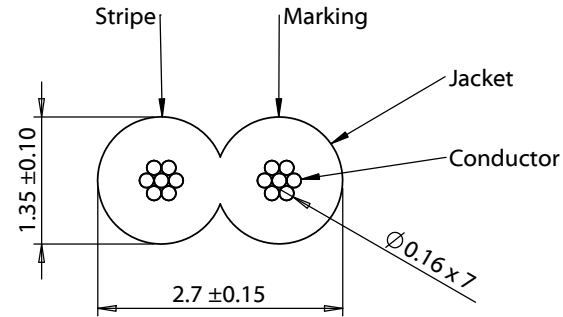

Revision:	Date:	Description:	Prepared: AW <small>Digitally signed by AW Date: 2018.09.06 11:39:43 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>
A	06/27/2014	Initial release	Verified: PS <small>Digitally signed by PS Date: 2018.09.06 13:22:25 -07'00'</small>	RoHS and REACH compliant	
A1	01/08/2016	Corrected tolerances	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
A2	09/06/2018	Increased operating temperature range		Description: Wire, 2C TS, 26 AWG, UL2468, 300V, 80C, 2.7 mm, VW-1, PVC	Scale: 15:1
					Size: A Part number: 30-00407 
					Sheet 1 of 1

5

4

3

2

1