

## DIRECTIONAL YAGI ANTENNAS

Y(B)8966

### GOLD SERIES DIRECTIONAL YAGI ANTENNAS PROVIDE INDUSTRY-LEADING DESIGN FEATURES WITH LONG TERM OPTIMAL PERFORMANCE

Y(B)8966 premium series directional Yagi antennas are fully gold anodized for corrosion resistance. All UHF and above frequency antennas feature internal matching to assure broad bandwidth and resistance to severe weather conditions. There is no gamma match to ice up, corrode or detune. Our engineering staff has optimized the product family for forward gain by computer analysis and then field-tested each for conformance.

#### FEATURES AND BENEFITS

- All UHF and higher frequency antennas feature 360° welds around each element and an end-of-boom N connector feed with an internal transmission line feeding the driven element.
- Every Yagi is tuned on a network analyzer for best power match and lowest VSWR.
- All Yagi antennas ship complete with a high quality cast aluminum mounting kit that includes stainless steel hardware and allows vertical or horizontal orientation during installation (VHF models require light assembly).

#### APPLICATIONS

- Point-to-point and multi-point / omnidirectional outdoor antennas applications used by private organizations and government agencies around the globe.
- Typical applications include transportation such as railroad switching, remote locations reporting examples that include oil fields, weather conditions and, meter data transmissions for utilities.

## ELECTRICAL

Frequency Range	896 - 970 MHz
Frequency Bandwidth	74 MHz
VSWR	< 2:1
Return Loss	-10 dB max
Nominal Gain	9 dBd
Front to Back Ratio	20 dBd
Maximum Power	300 W
Nominal Impedance	50 Ω
Polarization	Vertical or Horizontal
Pattern	Directional
Horizontal Beamwidth (For Horizontal Polarization)	56°
Vertical Beamwidth (For Vertical Polarization)	52°
Tuning	Fixed
Transmitting/Receiving	Both


## MECHANICAL

Material	Aluminum
Length	27.688"
Height	6.75"
Boom Diameter	0.875
Weight	3.9 lbs
Rated Wind Velocity	150 mph (241 kph)
Rated Wind Velocity (with 0.5" radial ice)	80 mph (130 kph)
Equivalent Flat Area	0.2492 sq. ft.
Cable	None
Termination	N-female connector
Color	Gold or Black Anodized
Lightning Protection	Lightning Arrestor LABH350NN (Sold Separately)
Mounting Included	Heavy duty cast aluminum bracket accommodates up to 2-1/2" mast


## CONFIGURATION

Y8966	Gold Anodized
YB8966-L	Black Anodized

## ANTENNA RADIATION PATTERN

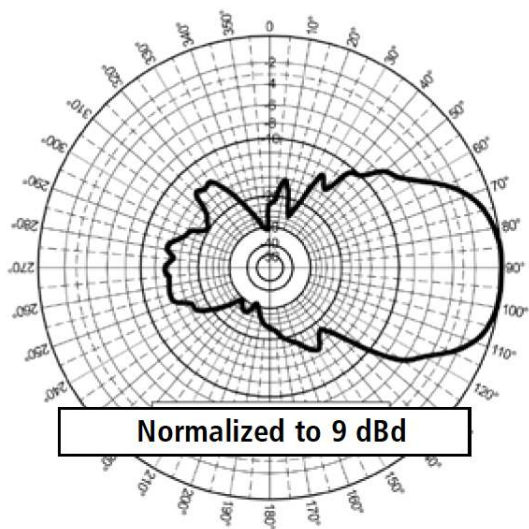

**Vertical-to-Vertical Polarization  
Azimuthal Pattern (Y, Z, or E-plane)**

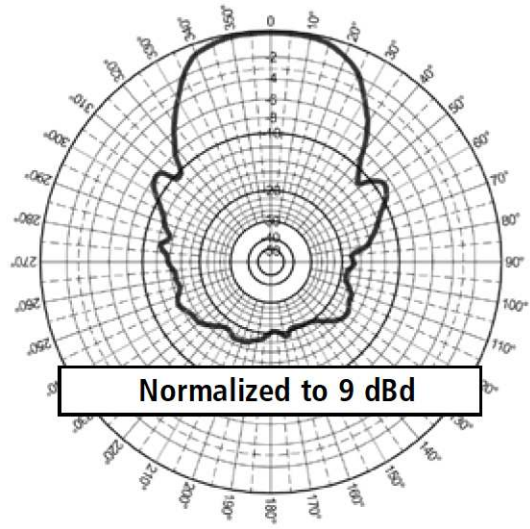

**Horizontal-to-Horizontal Polarization  
Azimuthal Pattern (Y, Z, or H-plane)**

### TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

### te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2023 TE Connectivity. All Rights Reserved.

04/23 Original