


COIL: @ 25°C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.0 VDC
MUST RELEASE	1.8 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: DIELECTRIC 1000 VRMS EXCEPT
500 VRMS ACROSS OPEN CONTACTS.

CUSTOMER DATA SHEET

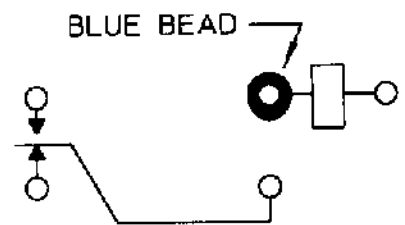

CONTACT RATING: 10 AMP/28 VDC
RESISTIVE 50,000 OPERATIONS

DR. R.B. 6/4/98 CK. *[Signature]*

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. C. I. I. STD.
CUST. NO.

TYPE 'CBW' RELAY

CBW-1C-24B